


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--------------------------|------|------|-----|
| 4/25/14 | D | Updated to UL file no. | T.B. | B.S. | |
| 01/27/17 | E | Updated UL File number | T.B. | B.S. | |
| 09/03/19 | F | Added weight of the part | T.B. | B.S. | |
| | | | | | |
| | | | | | |

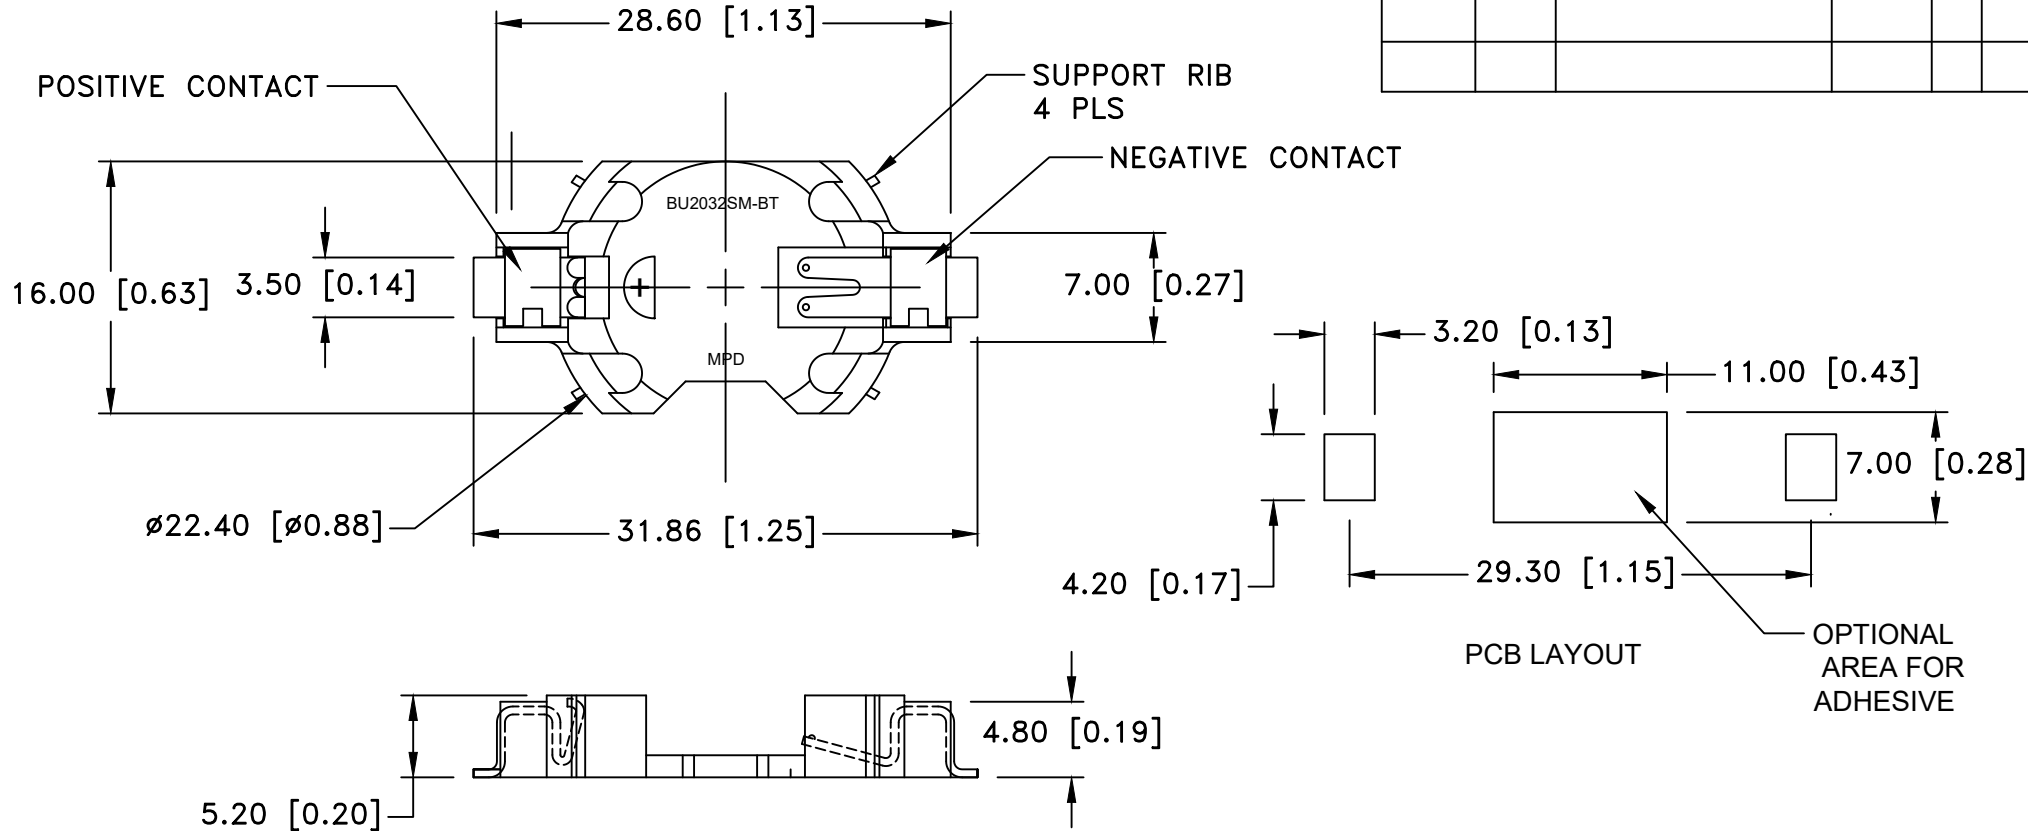


SPECIFICATIONS:

- * Holder material- White Zenite, 30% glass reinforced Liquid Crystal Polymer resin, UL File No. E344082, UL94V-0
- * Contacts : 0.020" thick PHOS-BRONZE, GOLD FLASH
- * Temperature range: -40°C to +280°C
- * Vibration Test: 10-50-10 Hz swept in 60 seconds
X,Y,Z direction: 1 hour each direction
- * Result: No dislodgement of the cell or damage
No discontinuity over 10 micro-seconds
- * Shock Test: Half sine wave acceleration 150G. 6 ms
3 shock pulses each direction per axis, total of 18 pulses
- * Result: No evidence of physical damage

ROHS COMPLIANT

WEIGHT: 1.12g.

| | | | |
|--------------------------------|---|-----------------------------------|------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal $\pm .5$ (.020) | | Scale | Drawn By B.S. |
| | | | Approved By T.B. |
| Fractional $\pm .8$ (.030) | Title SMD BU2032-SM CR2032 BATTERY HOLDER | | |
| Angular $\pm 3^\circ$ | Date 09/03/19 | Drawing Number BU2032SM-BT-GTR | |