
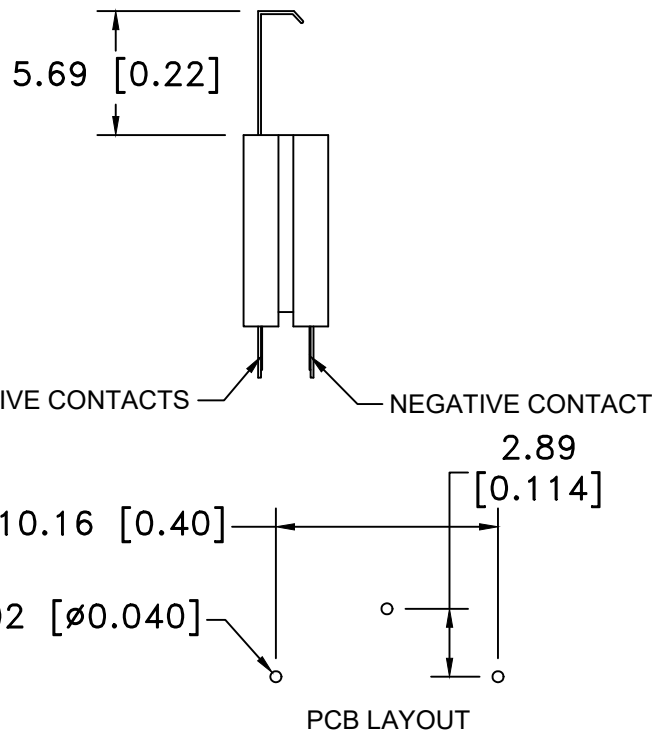
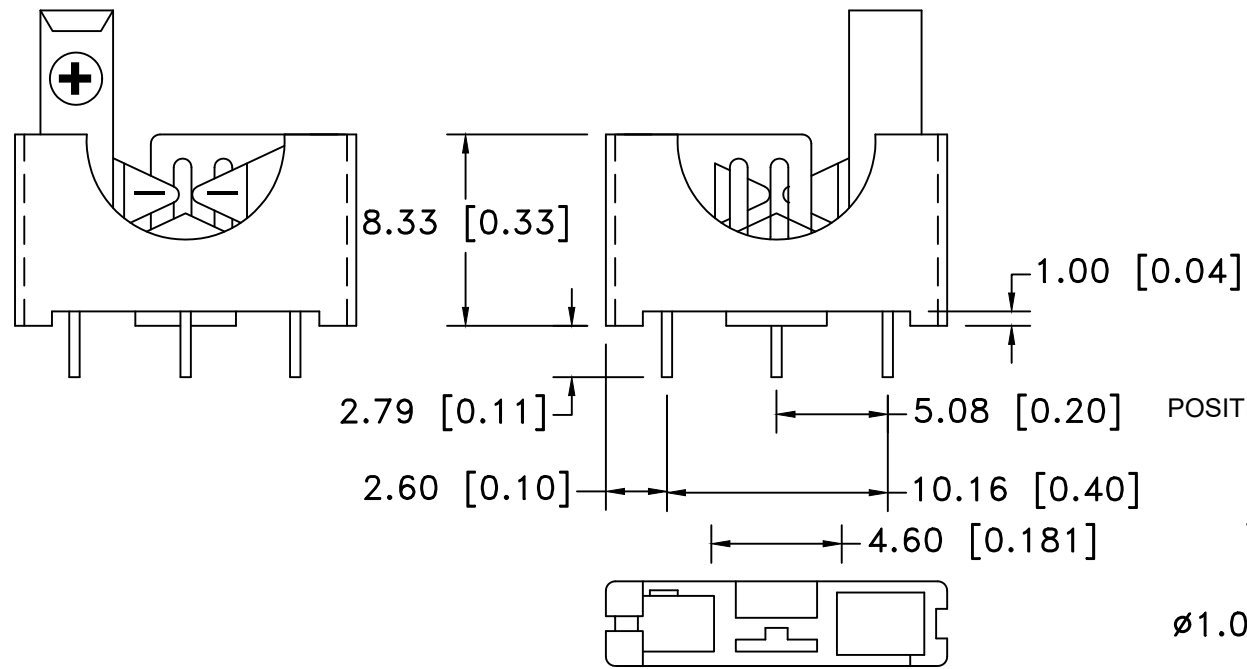



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/01/17	J	UPDATED SIDE VIEW	T.B.	B.S.	
10/31/19	K	ADDED WEIGHT OF THE PART	T.B.	B.S.	
09/23/20	L	ADDED FRONT VIEW	T.B.	B.S.	
09/02/21	M	ADDED MATERIAL NEAR CENTER CONTACT	T.B.	B.S.	

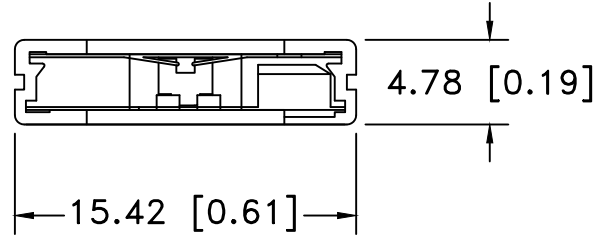

**NOTES:**

MATERIAL: GLASS FILLED NYLON 66, UL94V-0  
 COLOR BLACK, UL FILE NO. E245249  
 CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED  
 ELECTRICAL :  
 VOLTAGE: 250V AC  
 CONTACT RESISTANCE: 30mΩ MAX  
 INSULATION RESISTANCE: 1000mΩ AT DC 500V  
 DIELECTRIC STRENGTH: AC 1000V PER MINUTE  
 TEMPERATURE RANGE: -40°C TO +200°C  
 APPROXIMATE WEIGHT: 0.68g  
 ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title BR/CR/DL 1225 VERTICAL BATTERY HOLDER, 3 PINS		
Angular ± 3°	Date 09/02/21	Drawing Number BS-1225-PC	
			Approved By T.B.