




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

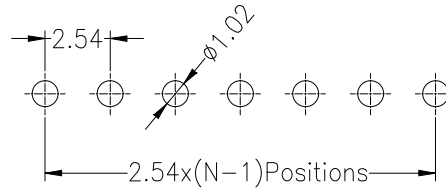

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C


Contact Material:Brass
Contact Plating:Au Or Tin Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

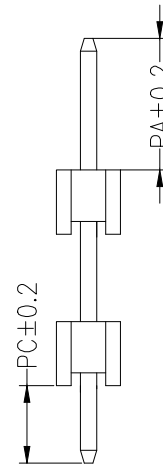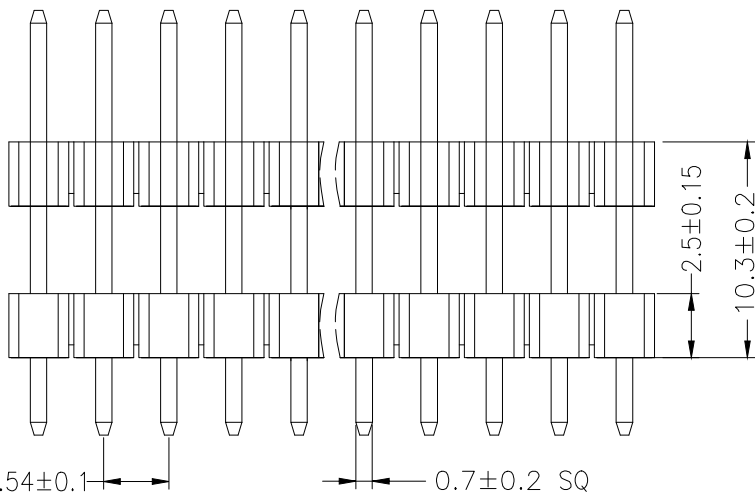

Dimension antitheses list

ITEM	PA	PC	L
Standard	2.35	2.35	15.00
Alternate			

Ordering Information

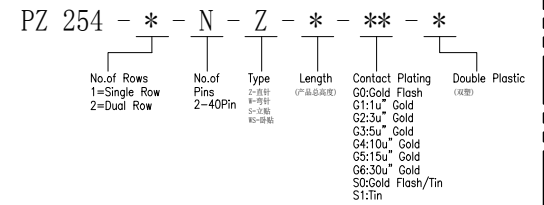

			GENREL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核 CHECK					
			X.X	± 0.30	批准 APPROVAL		产品名称 TITLE	2.54单排 直排针 双塑	版本 REV.	A
1			初版发行		比例 SCALE		产品料号 PART NO.	PZ254-1-N-Z-15-XX-DP	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	± 3.0°	投影 Projection		材料 MATERIAL		页次 SHEET	1/1