



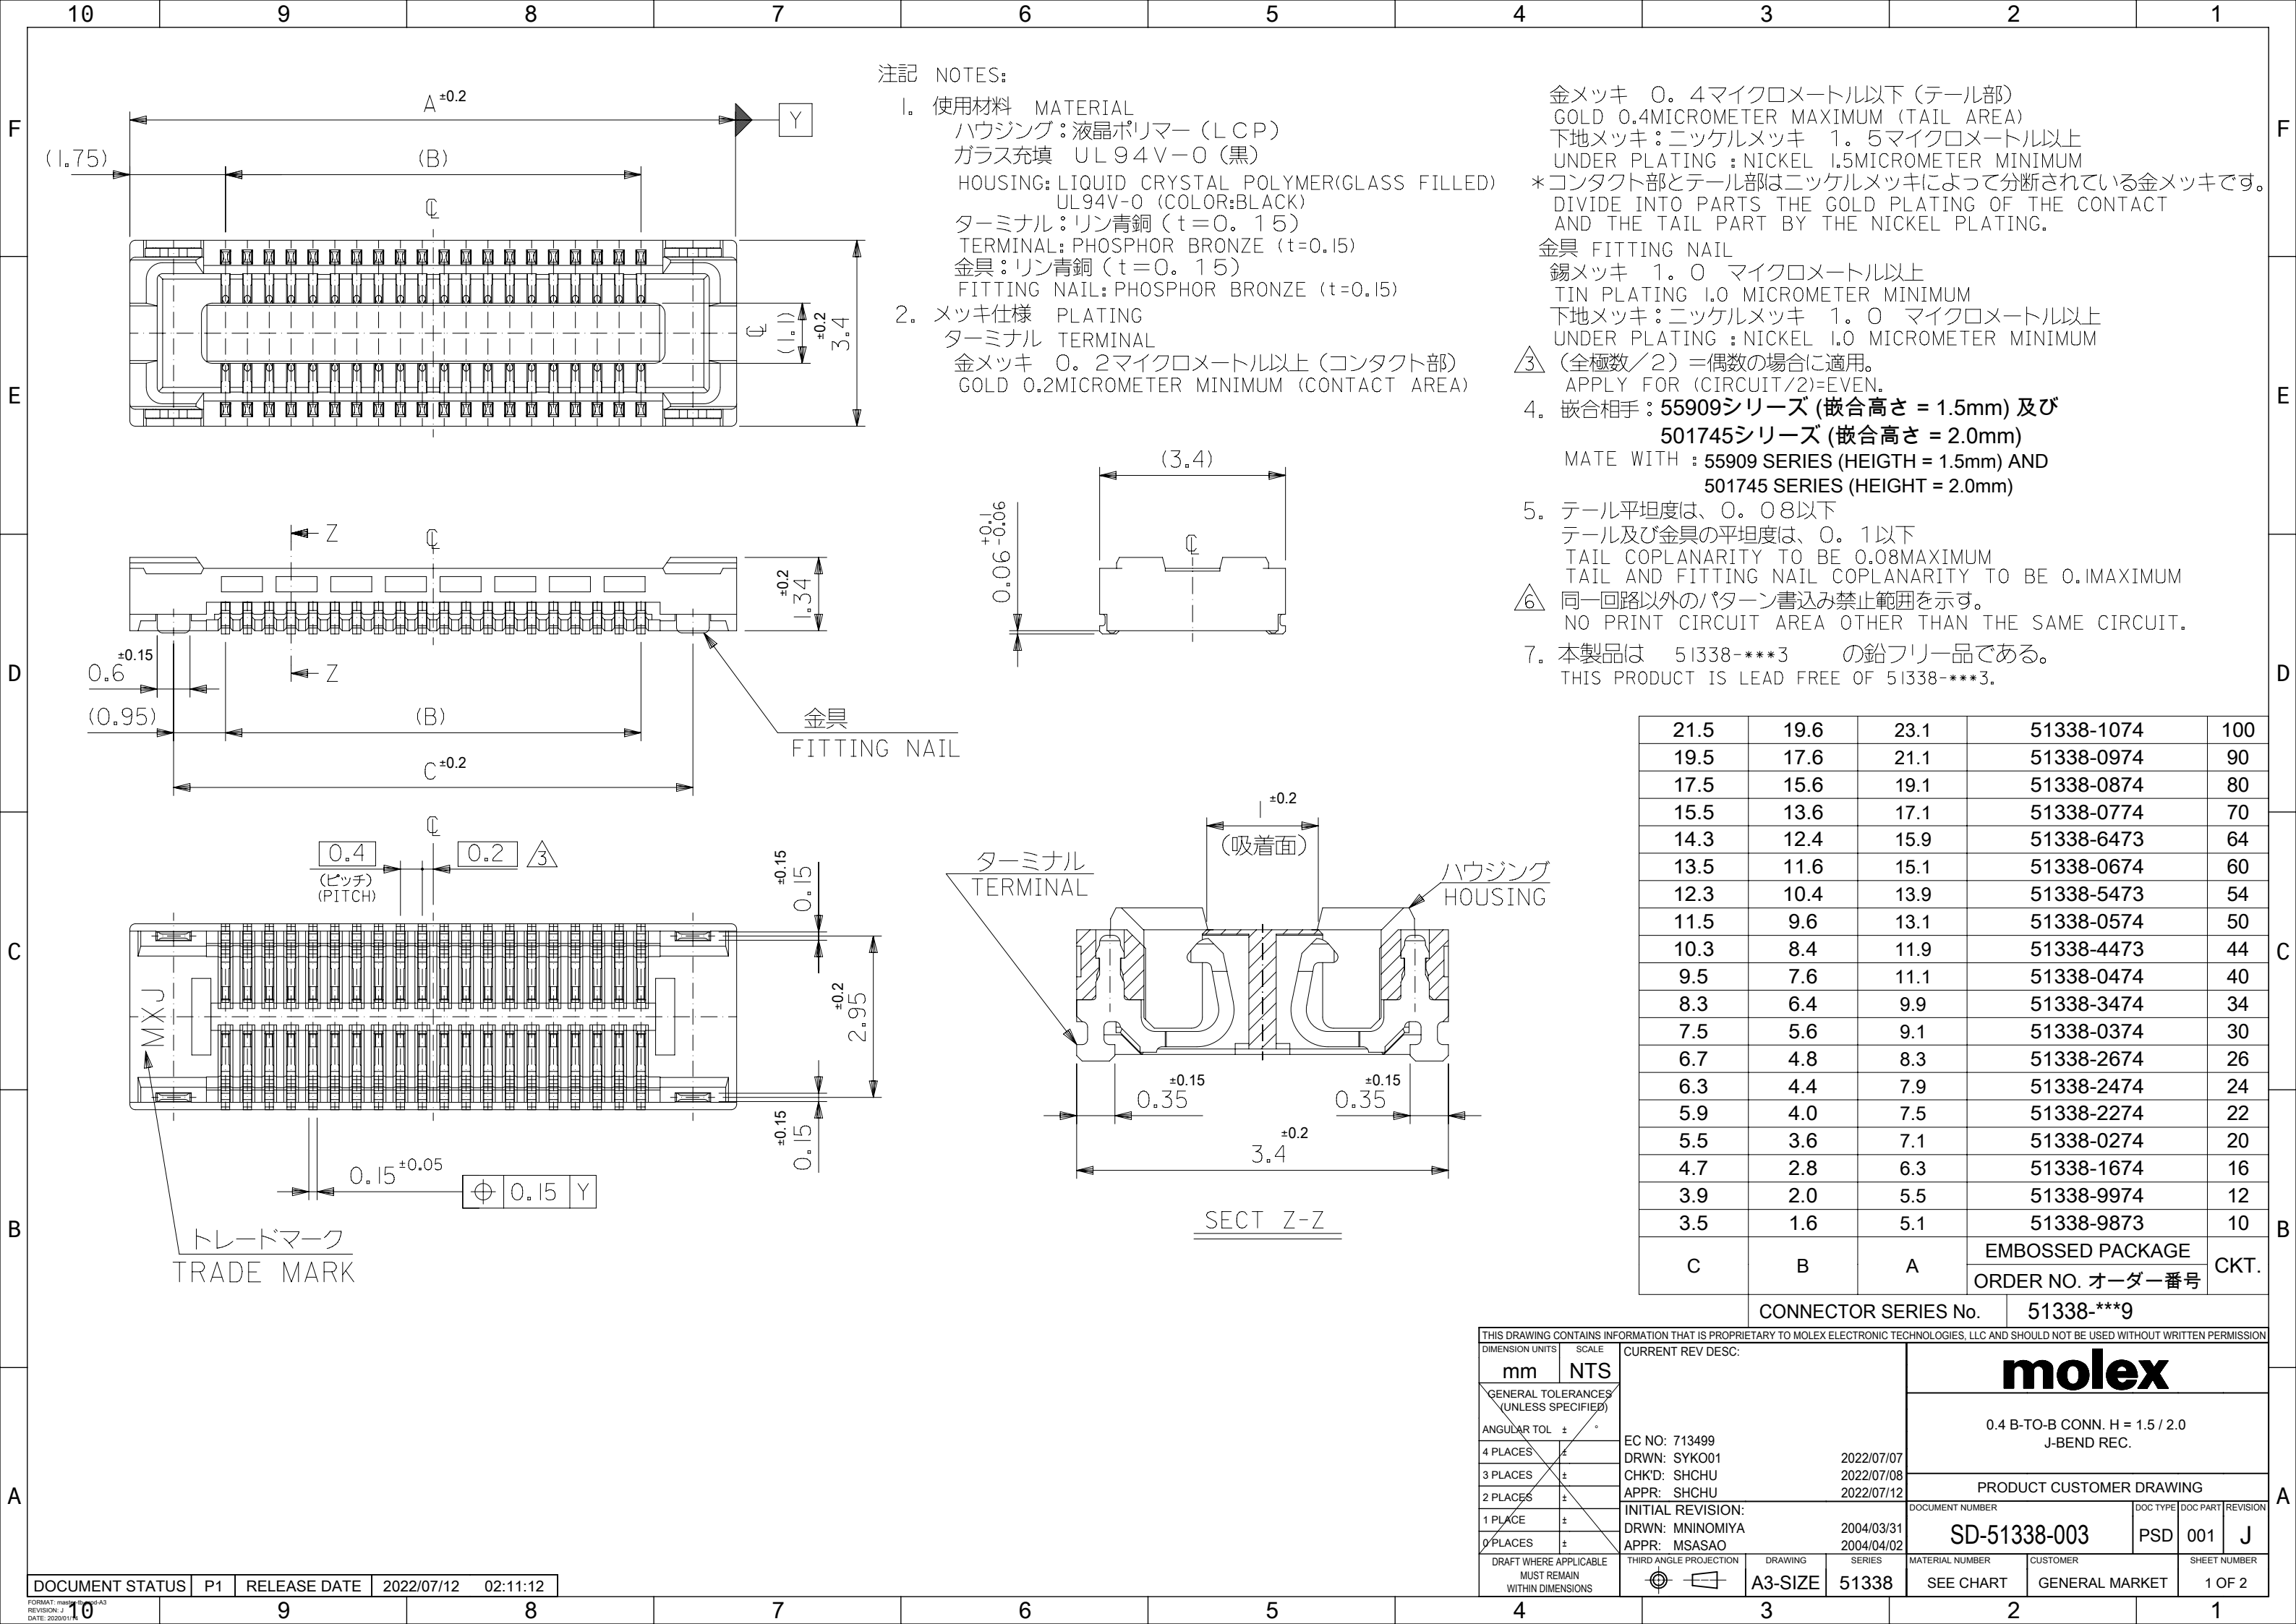

MATE : 51338 WITH 55909


MATE : 51338 WITH 501745

嵌合相手
MATE WITH
55909-****

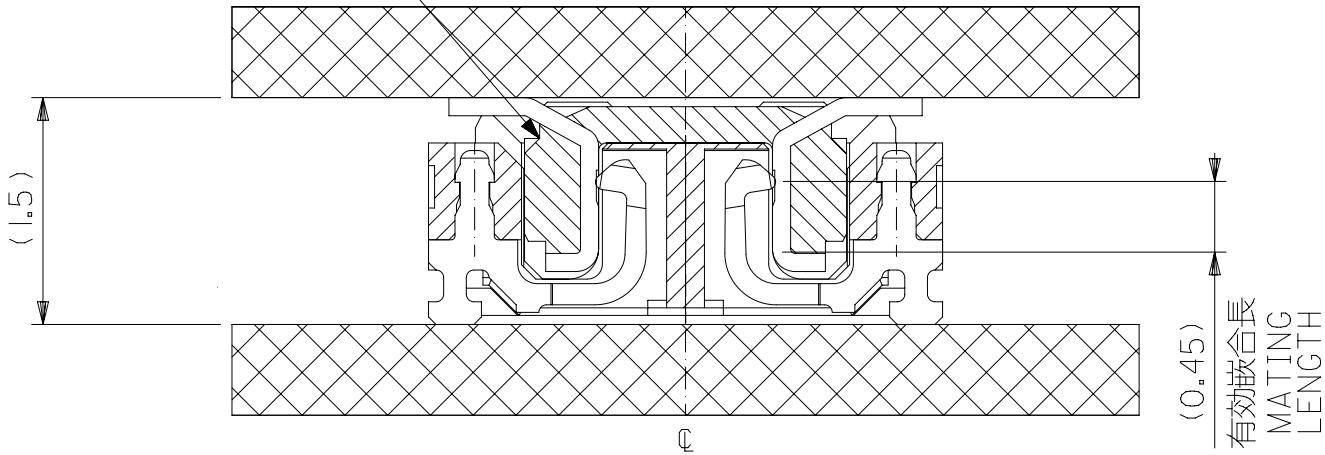


嵌合断面図 (参考)
MATED DRAWING (REFERENCE)


嵌合相手
MATE WITH
501745-0**1

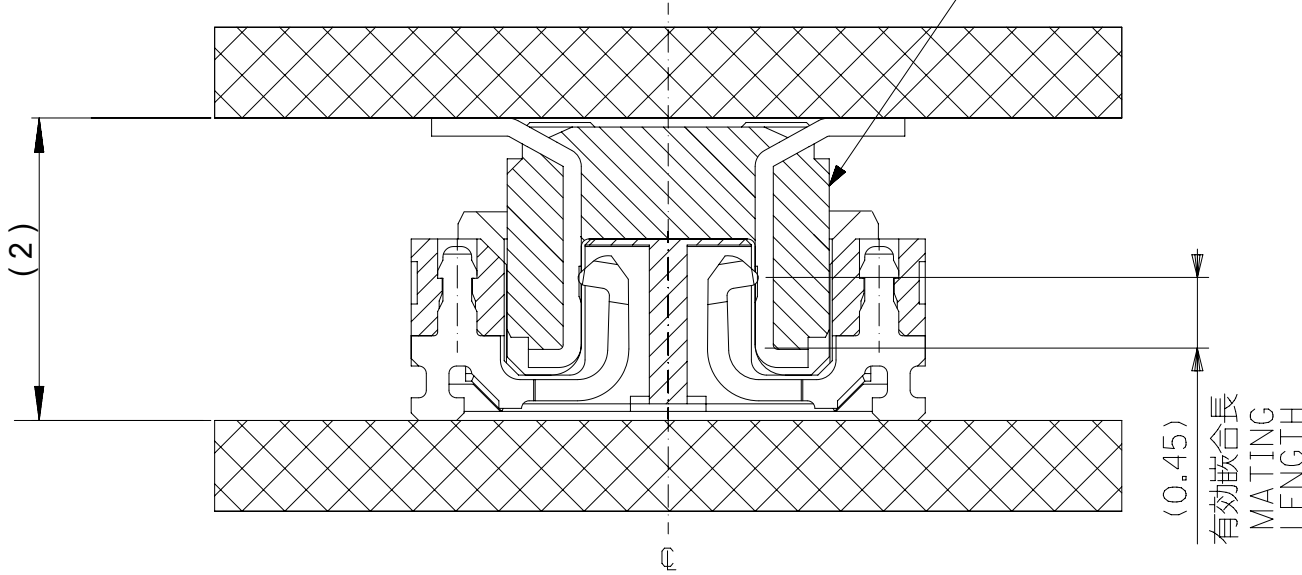

嵌合断面図 (参考)
MATED DRAWING (REFERENCE)

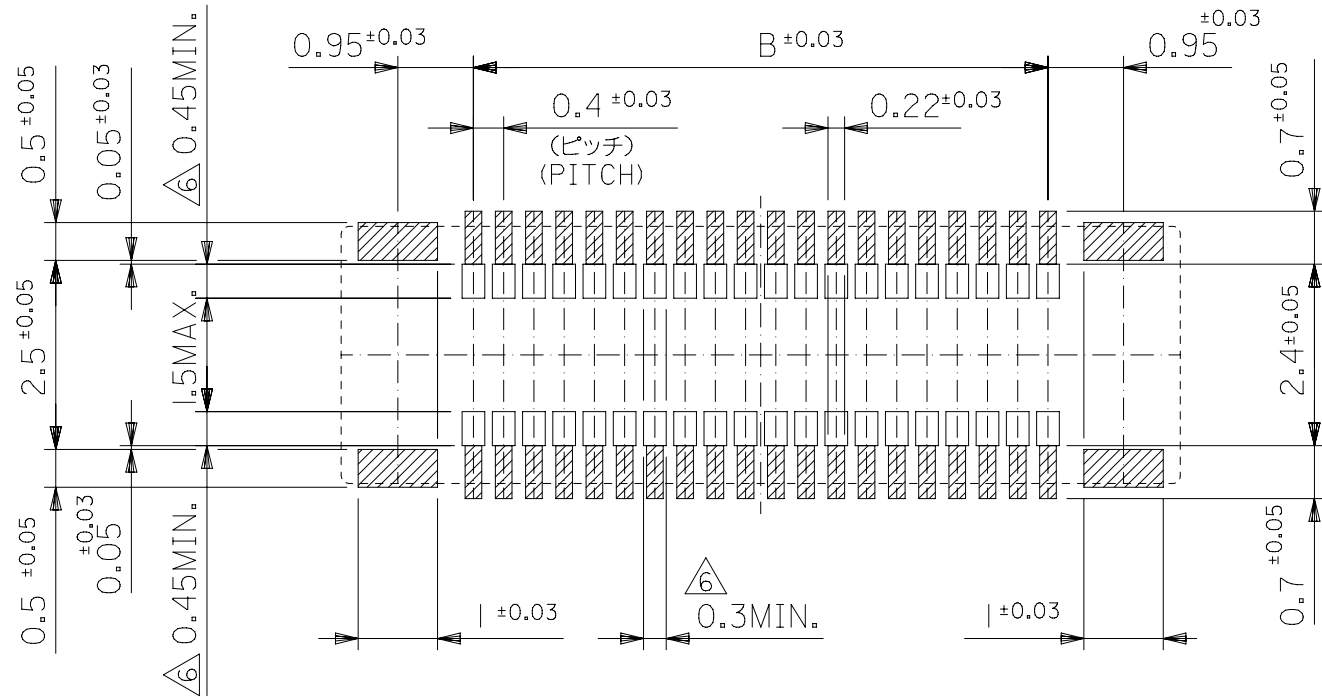


参考基板レイアウト (マウント面)
P.C.BOARD PATTERN DIMENSION. (REFERENCE)
(MOUNTING AREA)


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:											
mm		NTS		molex 0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC. PRODUCT CUSTOMER DRAWING											
GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL		± °													
4 PLACES		±													
3 PLACES		±		EC NO: 713499		2022/07/07		DRWN: SYKO01							
2 PLACES		±		CHK'D: SHCHU		2022/07/08		APPR: SHCHU							
1 PLACE		±		INITIAL REVISION:		2004/03/31		DRWN: MNINOMIYA							
0 PLACES		±		APPR: MSASAO		2004/04/02		APPR: MSASAO							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES							
						A3-SIZE		51338							
						MATERIAL NUMBER		CUSTOMER							
						SEE CHART1		GENERAL MARKET							
						DOCUMENT NUMBER		DOC TYPE							
						SD-51338-003		PSD							
						DOC PART		REVISION							
						001		J							
								SHEET NUMBER							
								2 OF 2							

NOTES

1. 製品詳細寸法については製品単体図面を参照下さい。
DETAIL DIMENSIONS, SEE PRODUCT DRAWING.
2. 梱包数量：2500個／リール
NUMBER OF CONNECTORS：2500PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

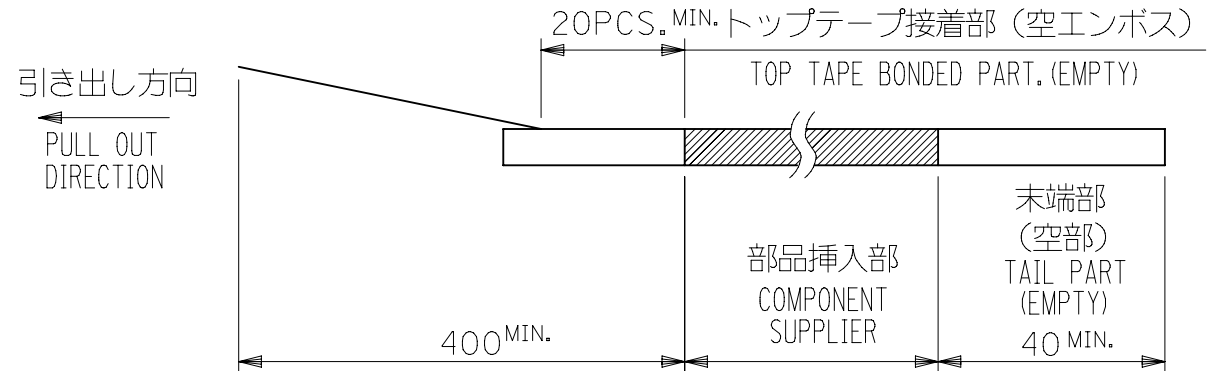


4. トップテープの剥離強度： 0.1N ～ 1.3N{10gf ～ 130gf}
(剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：0.1N ～ 1.3N{10gf ～ 130gf}
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.

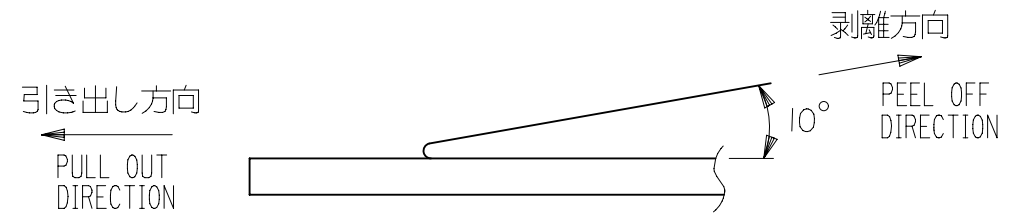


5. 材料
キャリアテープ (CARRIER TAPE)：ポリスチレン (PS)
トップテープ (TOPTAPE)：PET
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
6. 本製品は 51338-***4 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 51338-***4.


7. ELV 及び RoHS 適合品。
ELV AND RoHS COMPLIANT.

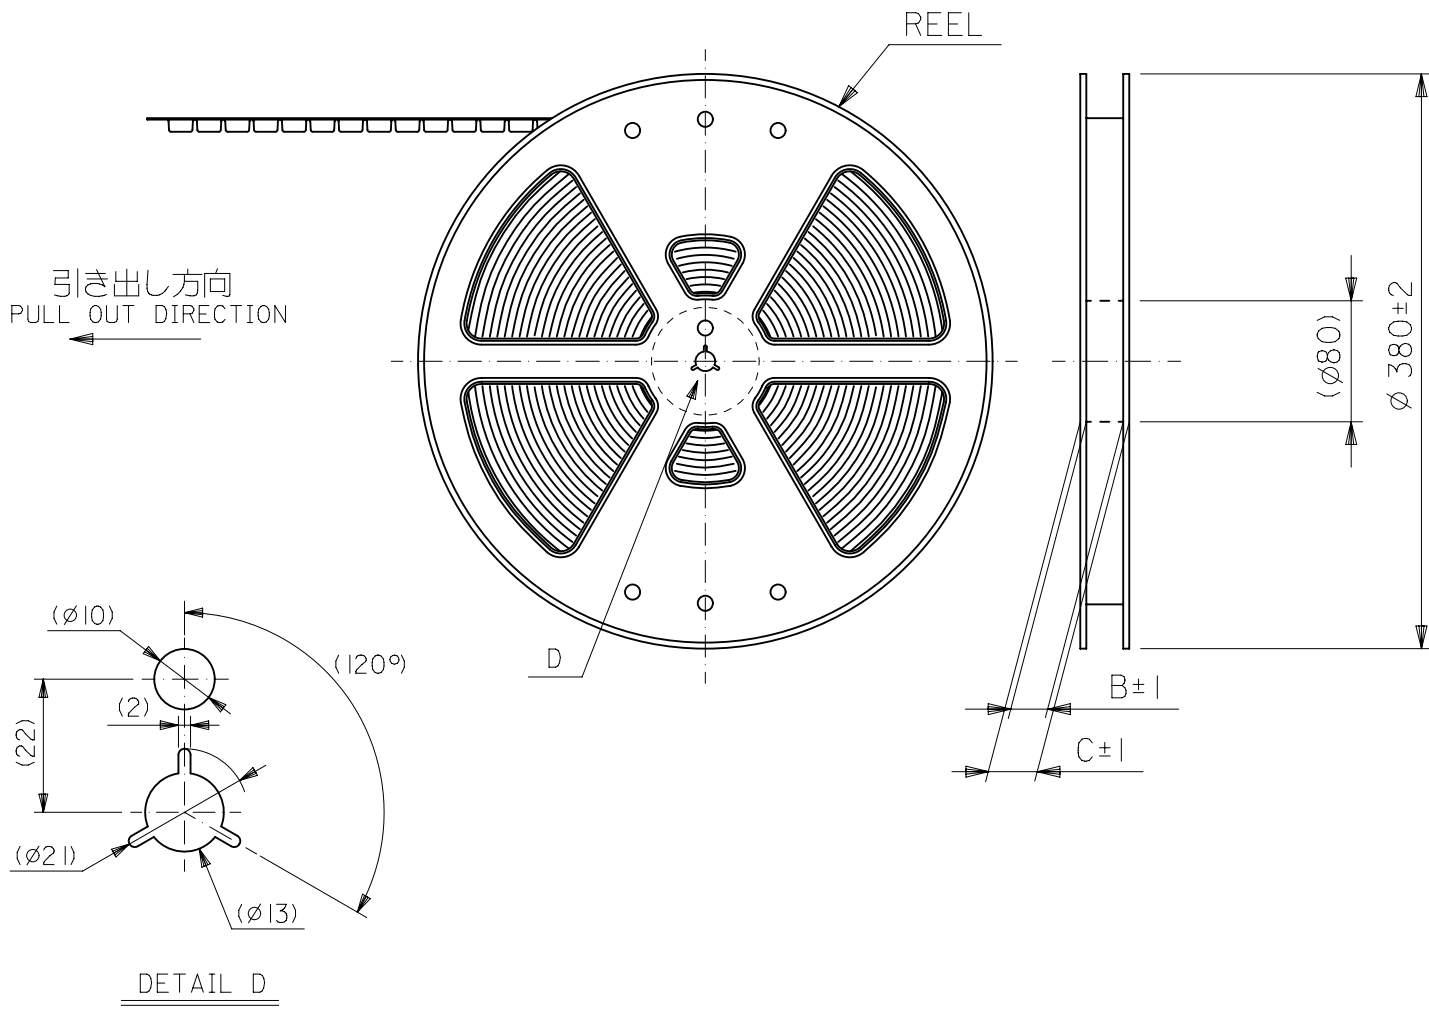

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex 0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.								
mm		NTS														
GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±				EC NO: 638555 DRWN: BKBAE 2020/05/15 CHK'D: SHCHU 2020/05/29 APPR: SHCHU 2020/06/01 INITIAL REVISION: DRWN: MNINOMIYA 2004/03/31 APPR: MSASAO 2004/04/02				PRODUCT CUSTOMER DRAWING								
												DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
								SD-51338-004		PSD	001	H				
								DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
											A3-SIZE	51338	SEE CHART	GENERAL MARKET	1 OF 4	

DOCUMENT STATUS	P1	RELEASE DATE	2020/06/01	01:17:14
-----------------	----	--------------	------------	----------

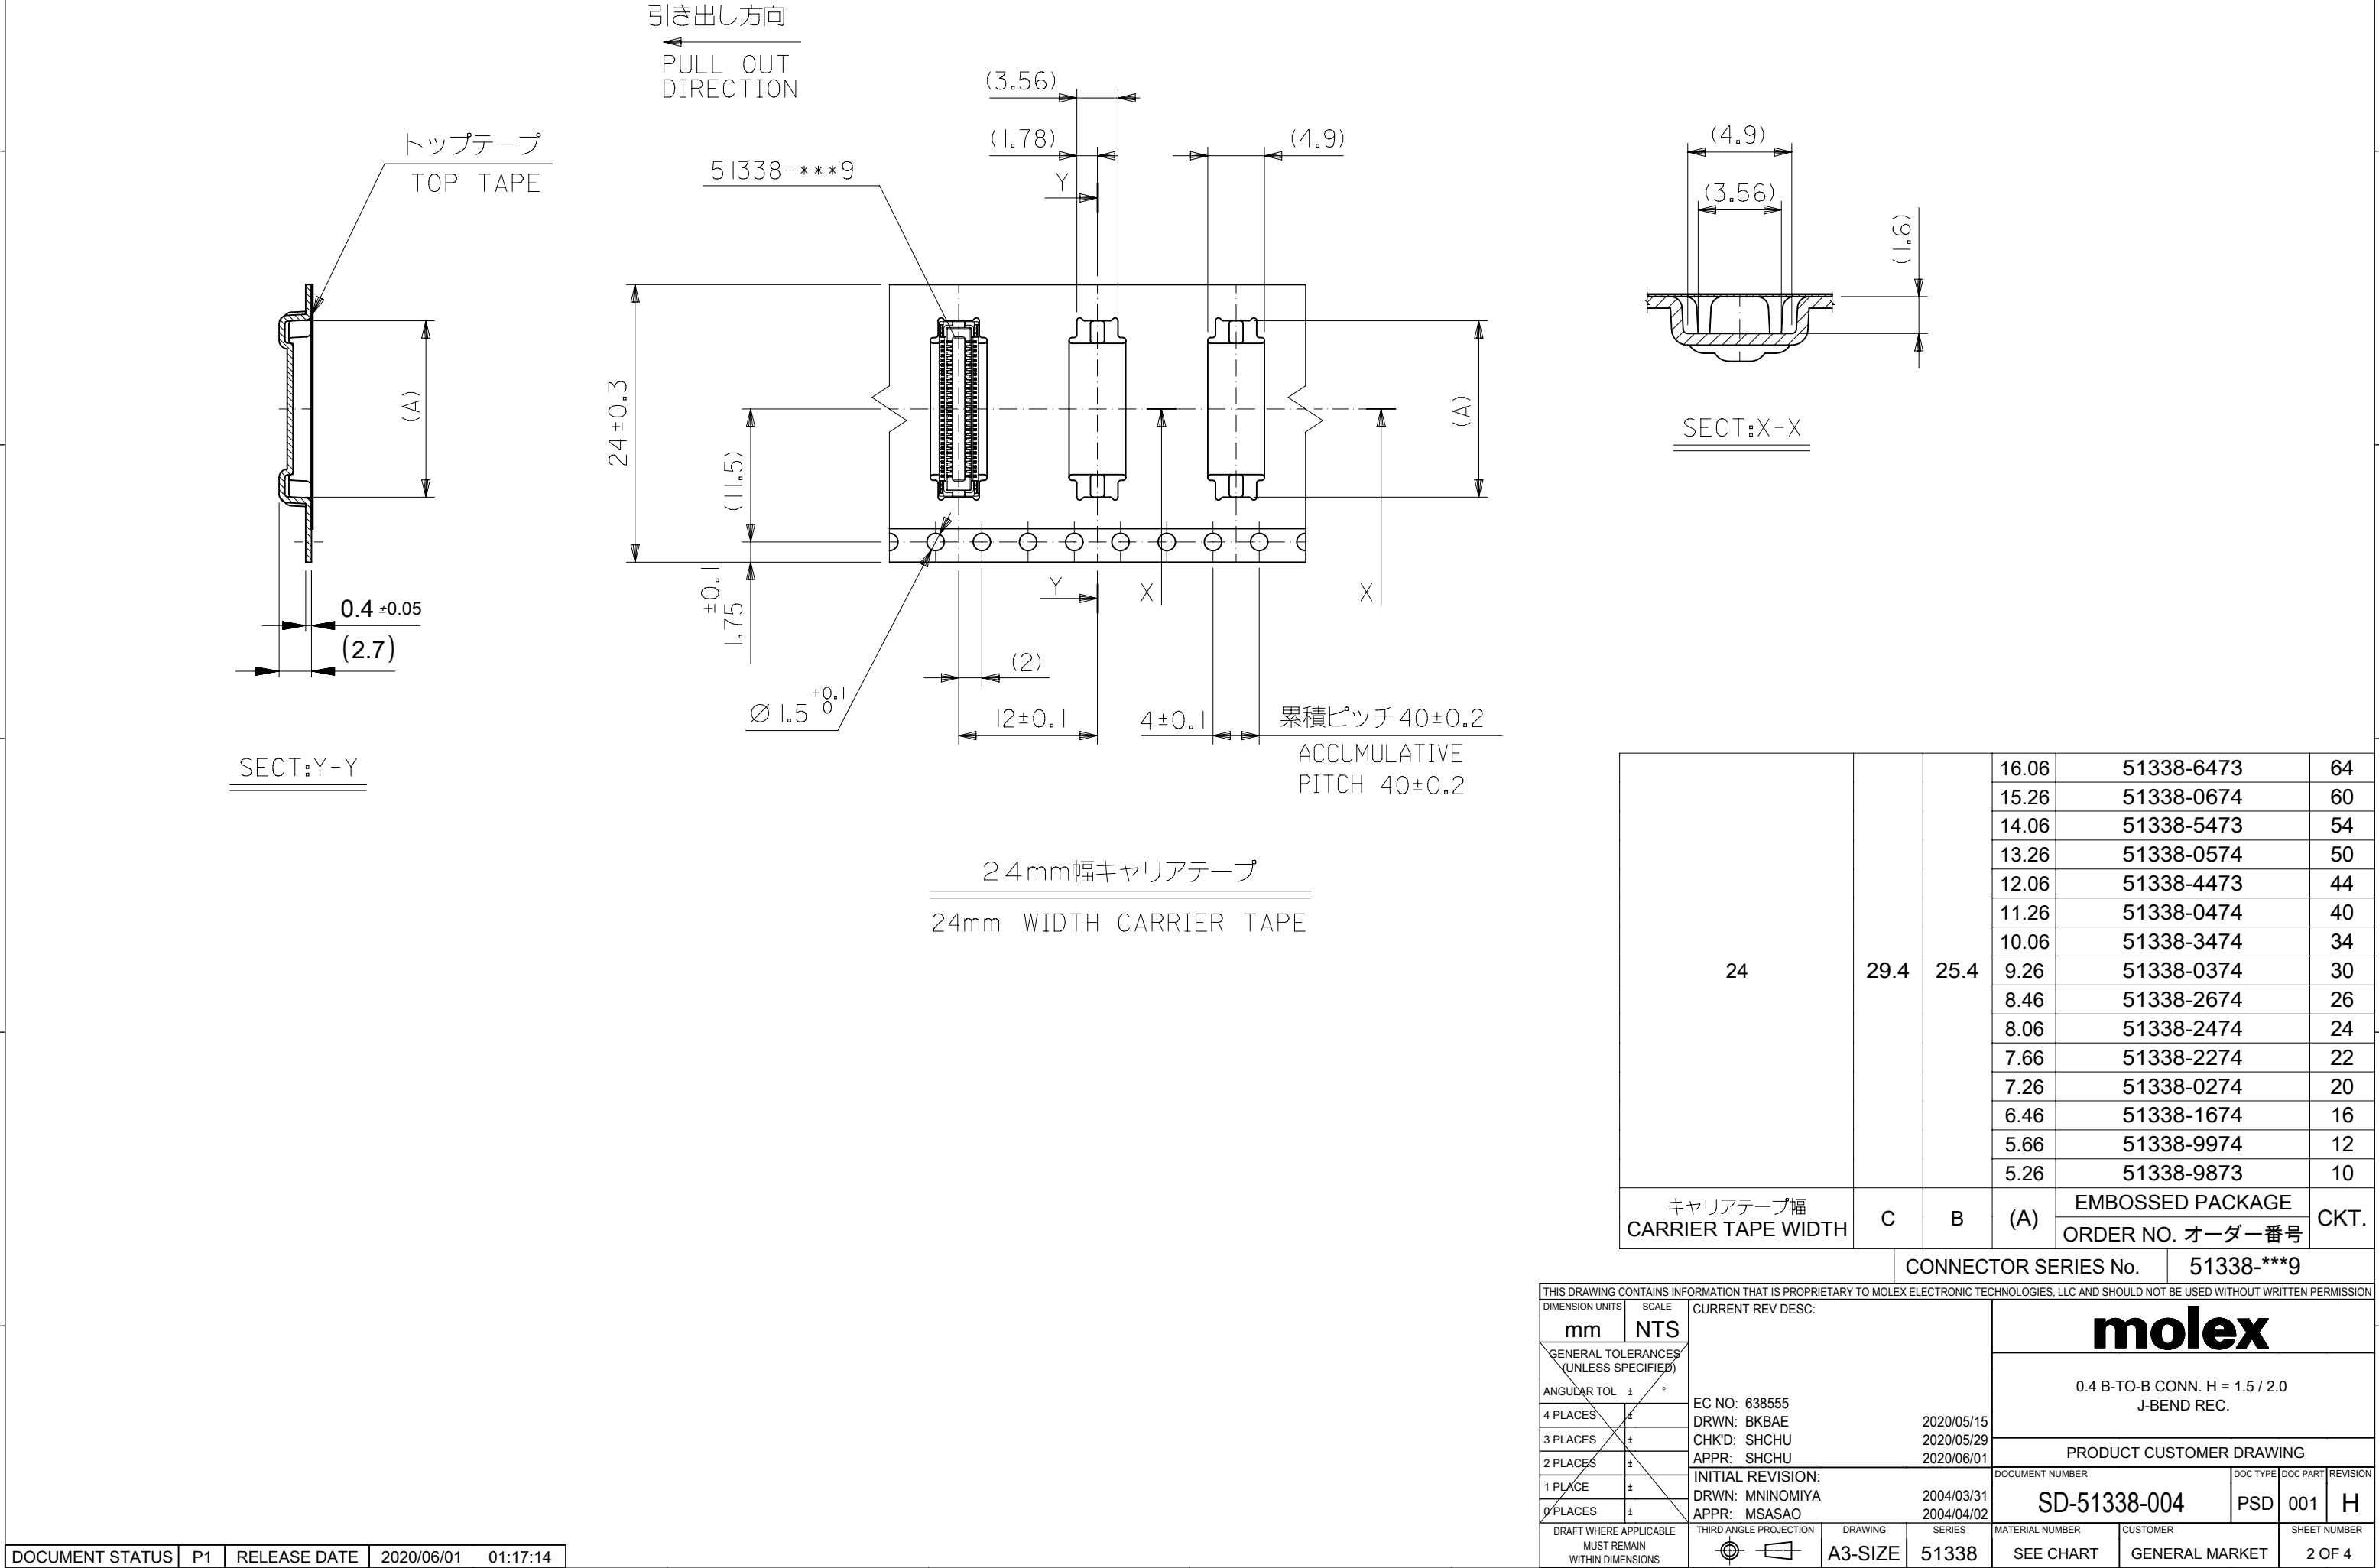

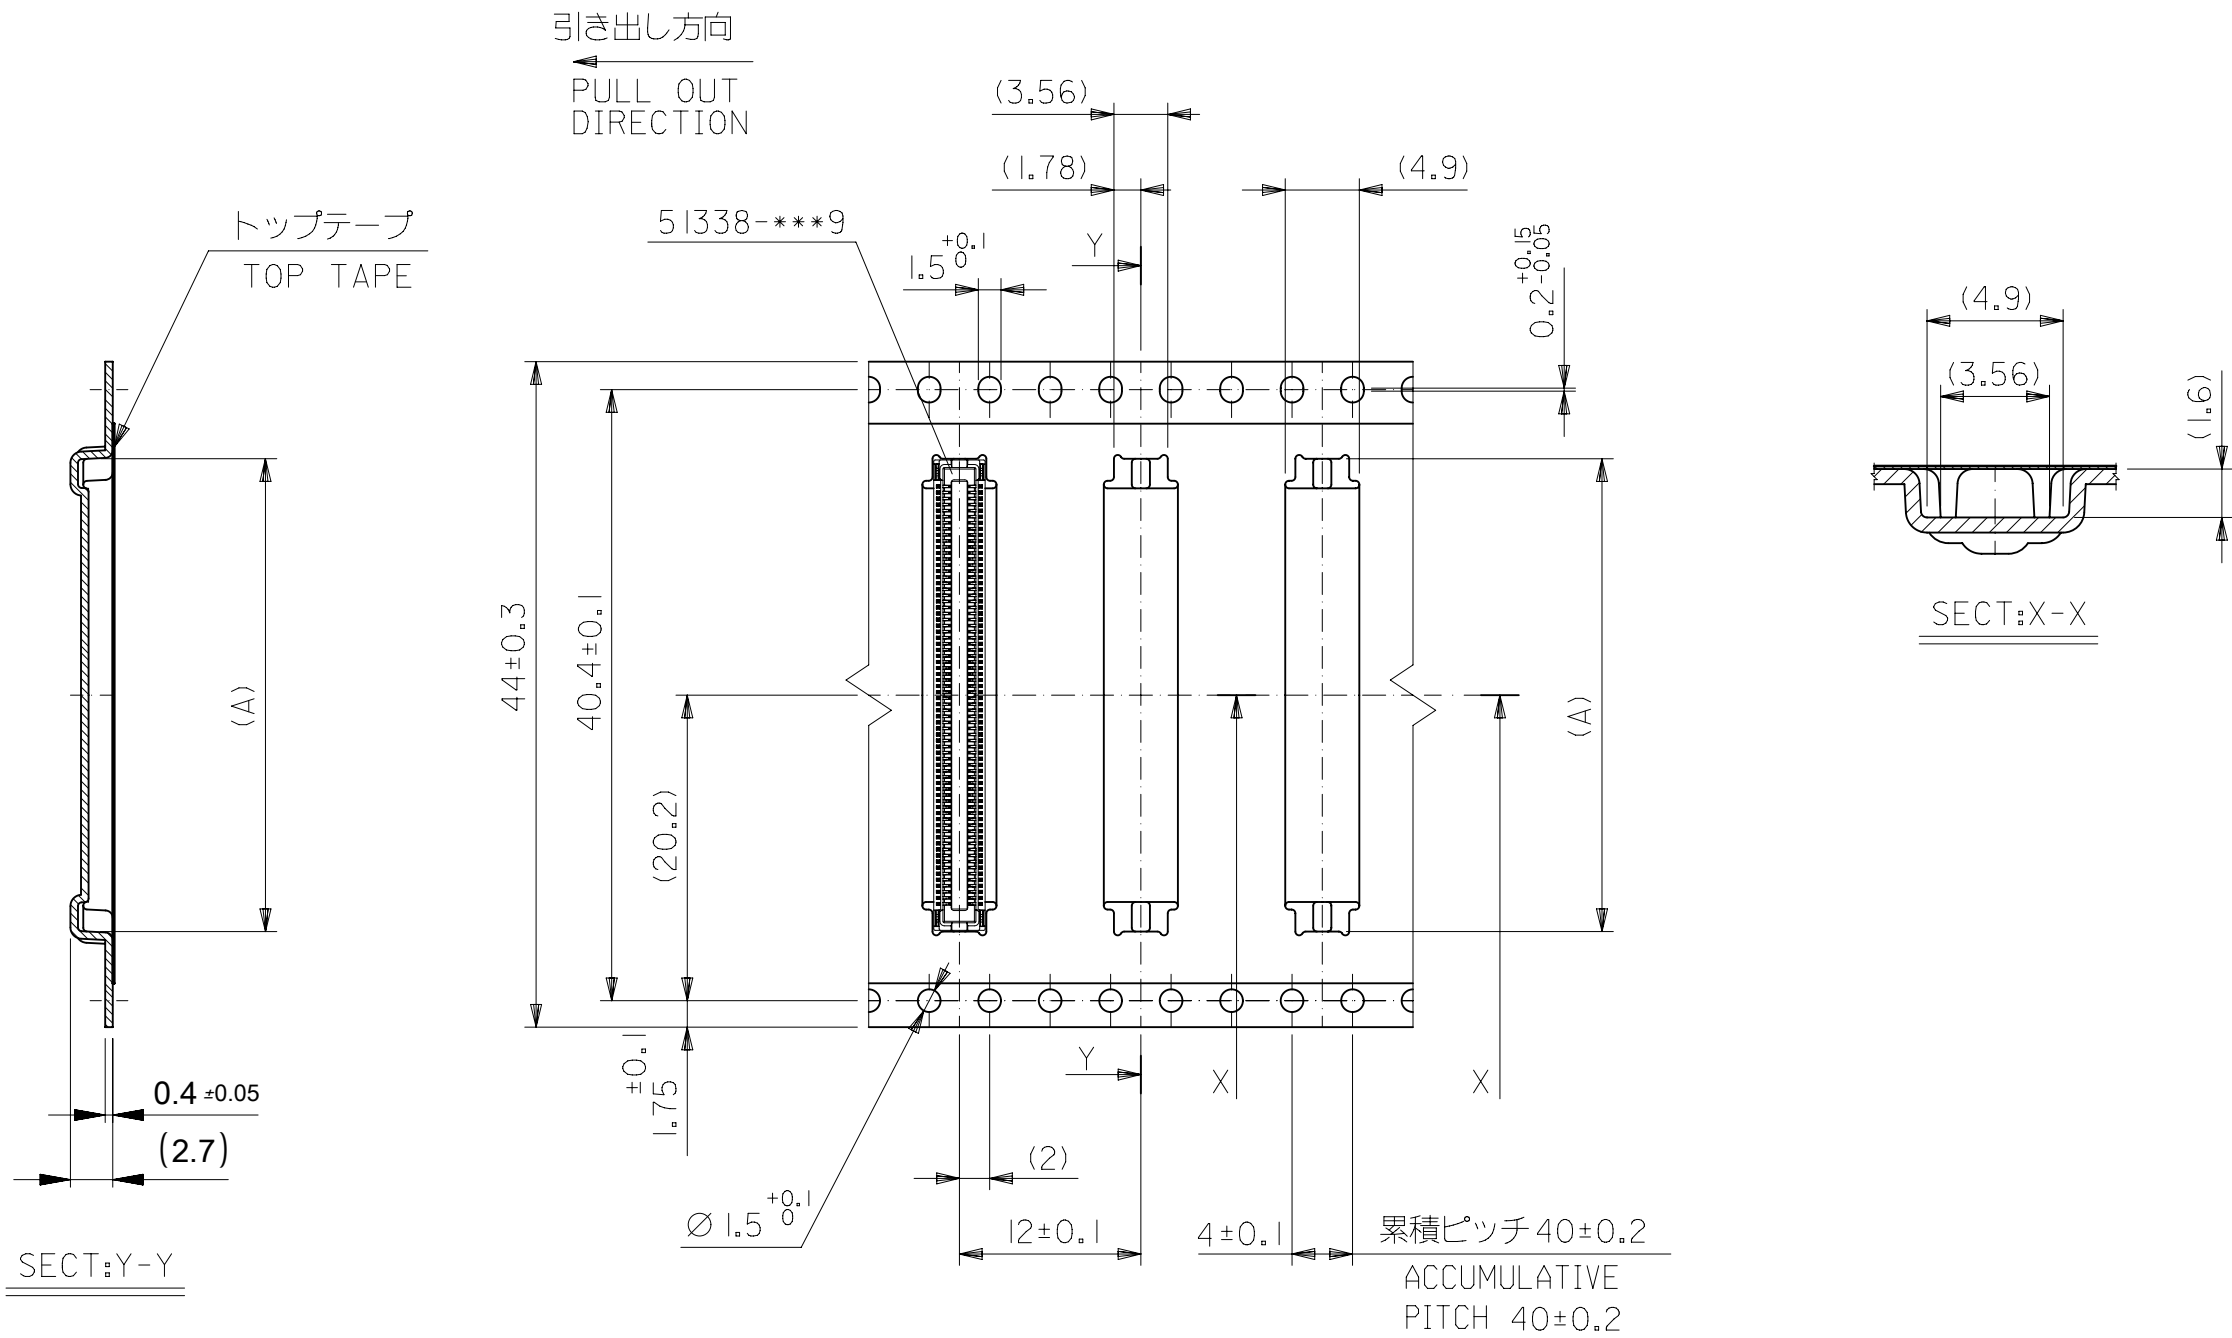

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

44	49.4	45.4	23.26	51338-1074	100
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE	CKT.
				ORDER NO. オーダー番号	

CONNECTOR SERIES No. 51338-***9

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex		
mm	NTS								
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL ± °									
4 PLACES ± °									
3 PLACES ± °		EC NO: 638555			0.4 B-TO-B CONN. H = 1.5 / 2.0 J-BEND REC.				
2 PLACES ± °		DRWN: BKBAE							

DOCUMENT STATUS	P1	RELEASE DATE	2020/06/01	01:17:14
-----------------	----	--------------	------------	----------