
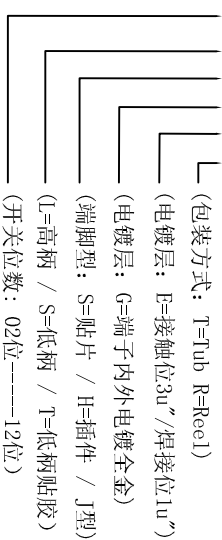

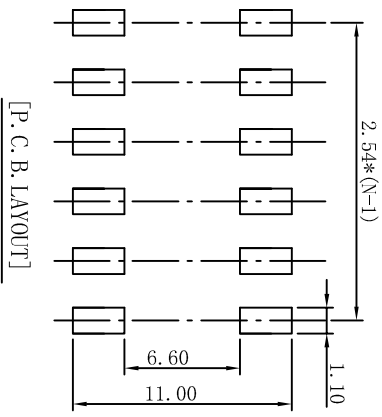
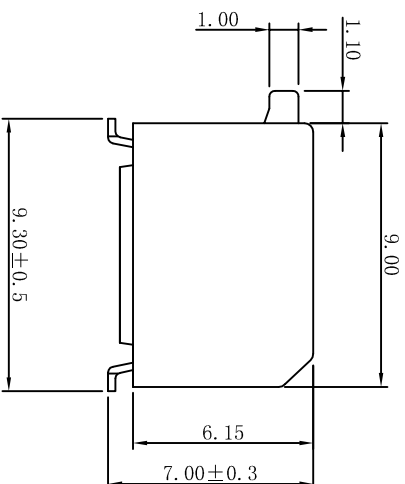


ROHS compliant

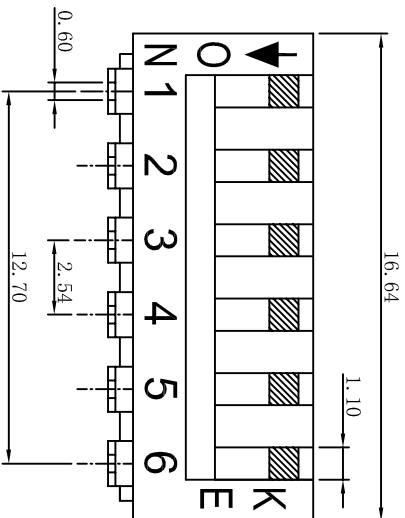

REV.	ECN NO.	DRAWN	DATE

NOTES:

1.Specification :

- 1> Operation force: 500gf Max.
- 2> Operation Temperature: -30 °C to +85°C.
- 3> Storage Temperature: -40 °C to +85°C.
- 4> Mechanical Life: 3000 cycles operations.
- 5> Resistance to Soldering: 260 ± 5°C for 3-5 Seconds.

2.PLATING:

- 1> GOLD Flash 1u" (min) SOLDERTAIL,
- 3u" GOLD PLATING ON THE CONTACT AREA.

3.ELECTRICAL:

- 1> Non-switch Rating: 100mA at 50V DC.
- 2> Switching Rating: 25mA at 24V DC.
- 3> Contact Resistance: Initial 50mΩ Max. Contact Resistance: After life 100mΩ Max.
- 4> Insulation Resistance: 1000MΩ Min at 50VDC.
- 5> Dielectric Strength: 500V AC for 60seconds.
- 6> Switch Capacitance: 5PF Max at 1MHZ.

4.PART NUMBER DESCRIPTION:

DSPV XX L S G E T

- (包装方式: T=Tube R=Reel)
 - (电镀层: E=接触位3u"/"焊接位1u")
 - (电镀层: G=端子内外电镀全金)
 - (端脚型: S=贴片 / H=插件 / J型)
 - (L=高柄 / S=低柄 / T=低柄贴胶)
 - (开关位数: 02位-----12位)
- 5.PACKAGE:** 30pcs/Tube, 1200pcs/Box.

Drawing	dengkg	Date	2012.03.25	LINER	ANGLES	PRODUCT Family	DSPV Series Pitch 2.54mm
Check	zhong	Scale	4:1			PRAT NO.	DSPV06LSGET
Approved		Unit	MM			FILE NO.	KE-DSPV-006-S-A
Size	A4	Rev.	A			PROJECTION	

东莞市康深电子科技有限公司
Kongshen Electronics technology co., LTD.