
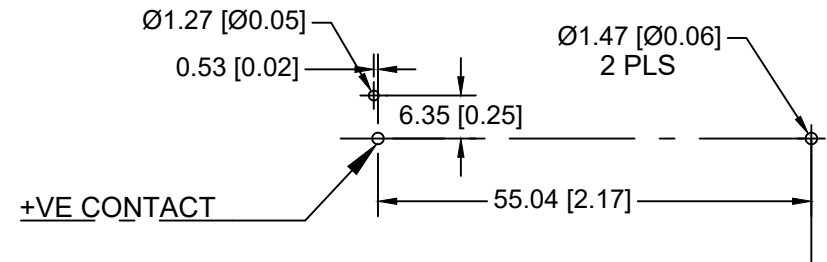
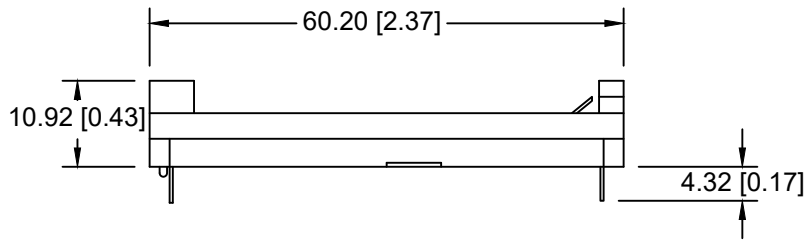



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/30/18	A	Dim. 6.35 was 5.46	T.B.	B.S.	
02/27/19	B	Updated note to "ROHS COMPLIANT"	T.B.	B.S.	

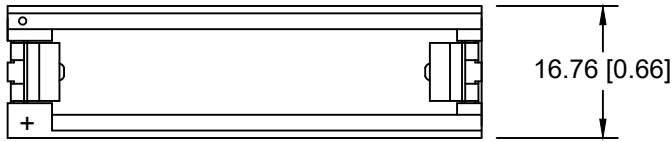

PCB LAYOUT

SPECIFICATION:
 HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 CONTACTS: NICKEL PLATED STAINLESS STEEL, TYPE 301, SPRING TEMPER
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title ONE "AA" CELL SPRINGLESS HOLDER		
Angular ± 3°	Date 02/27/19	Drawing Number BA1AAPC	
		Approved By T.B.	