
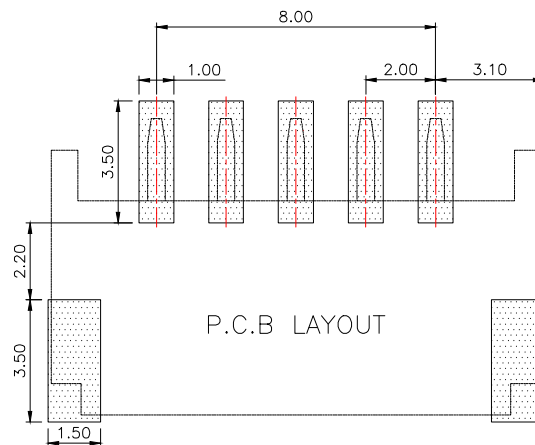
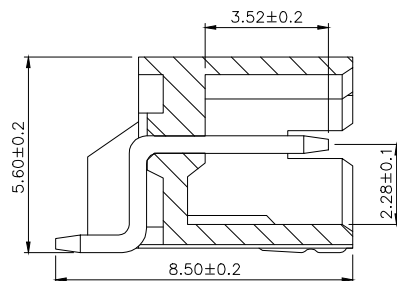
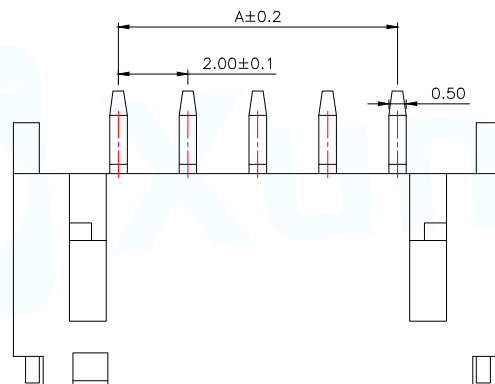
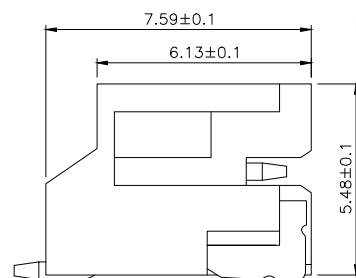
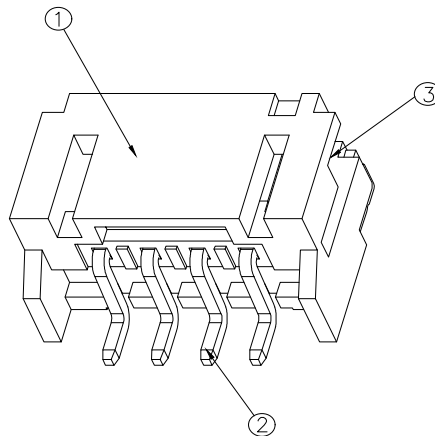


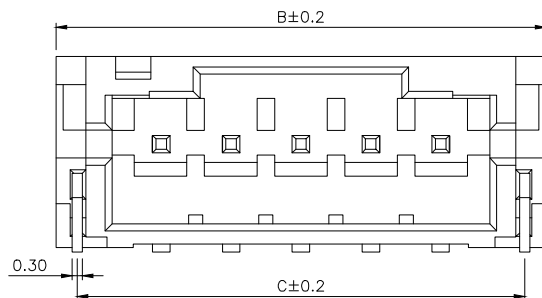

Pin	A	B	C
2	2.00	8.00	6.80
3	4.00	10.00	8.80
4	6.00	12.00	10.80
5	8.00	14.00	12.80
6	10.00	16.00	14.80
7	12.00	18.00	16.80
8	14.00	20.00	18.80
9	16.00	22.00	20.80
10	18.00	24.00	22.80
11	20.00	26.00	24.80
12	22.00	28.00	26.80
13	24.00	30.00	28.80
14	26.00	32.00	30.80
15	28.00	34.00	32.80
16	30.00	36.00	34.80

技术参数

间距:2.0

温度范围: -25~+85℃

额定电压: 250V AC,DC

额定电流: 1.0A AC,DC

接触电阻: 20mΩ

绝缘电阻: 500MΩ

耐压: 500V AC/minute

材料/Material

①塑座:本色

②接触针:黄铜(镀锡)

③焊片:黄铜(镀锡)

④吸盖:本色

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。

2. 锁扣窗口: 2~3PIN为1个, ≥4PIN为2个。

3. 不同PIN位吸盖加入/取出力有差异, 实属正常现象。

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: WAFER 2.00 贴片
			PAR WAFER-200W-NP
DECIMALS:	ANGLES:		DWN
X.:±0.20	X':±5°		CHKD
X.X:±0.10	X.X':±3°		APVD
X.XX:±0.05	X.XX':±1°	CUSTOMER COPY	SCALE:1:1 UNIT:MM
			SIZE:A4 SHEET:1F1 REV:A