


HSF RoHS



SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C ±5°C, 10s(PBT insulator)
 260°C ±5°C, 10s(PA6T&PA9T&LCP insulator)

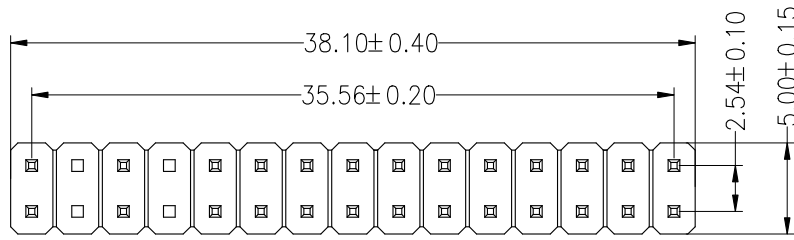


注: 缺第3.4.7.8PIN

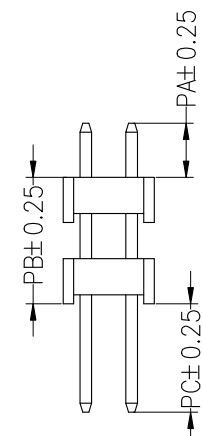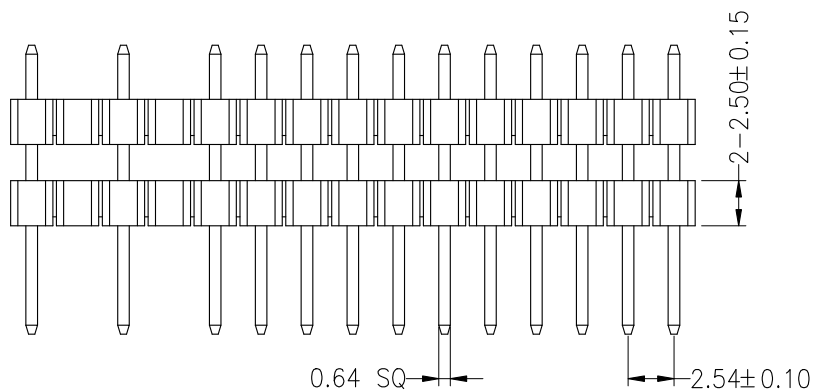

Ordering Information

1225 22 15 X N XX S XXX X XX

No. of Pins Per Row 15P
 Insulator Material Option
 A=BK-PBT
 C=BK-PA6T
 E=BK-PA9T
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 G1:1u" Gold
 G2:1.5u" Gold
 G3:2u" Gold
 G4:3u" Gold
 G5:5u" Gold
 G6:10u" Gold
 G7:15u" Gold
 G8:30u" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Pin Length
 Packing
 0=PE Bag
 A=Tray
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 code stream 01~99

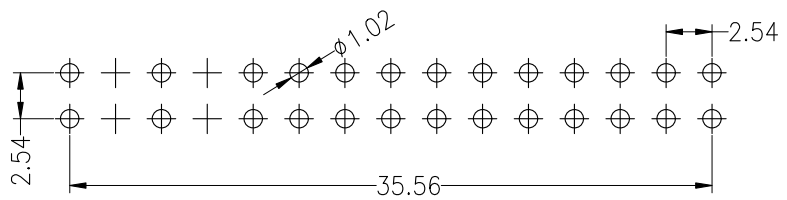

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list			
ITEM	PA	PB	PC
Standard	3.00	7.00	6.00

				OPERATION		DRAW		RICH LIN		23.04.25		SCALE		FIT		JILN 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588			
				X.X ±0.30								UNIT		mm					
				X.XX ±0.20		CHECK						SIZE		A4					
A0		2023.04.25		NEW DRAWING								SHEET		1/1				PART NO. 12252215XNXXSXXXXXX	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE						PROJ.		TITLE:				2.54PH Dual Row Double Plastic 180° H=2.5	