

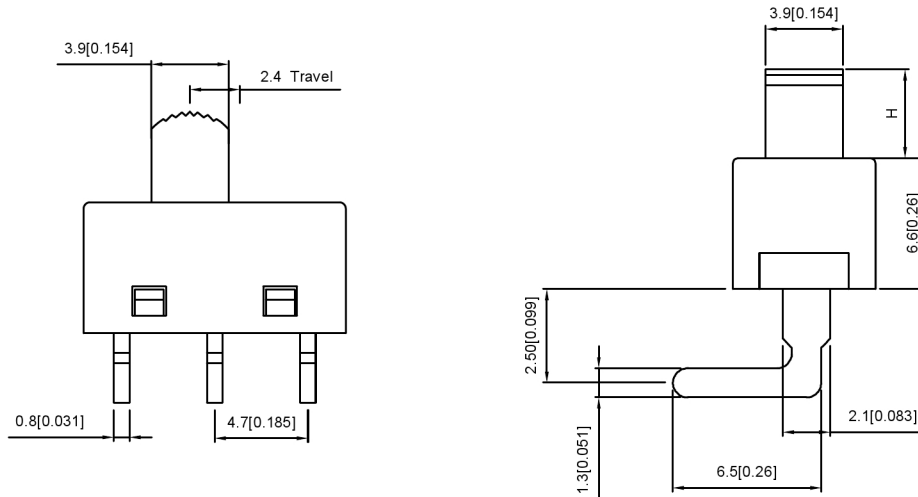


Specification:

1. Rating: 6A 120VAC
2. Contact resistance: $\leq 30 \text{ m}\Omega$
3. Insulation resistance: $\geq 100 \text{ M}\Omega$ (DC 500V/Min)
4. Electronics life: > 10000 cycles
5. Operation force: $250 \pm 100 \text{ gf}$

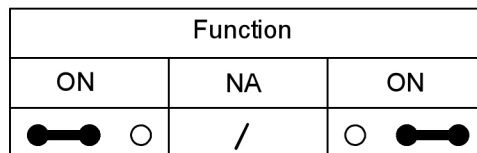

SS-12M12 X X



广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
				ANGULAR $\pm 5^\circ$
				$L \leq 4$ ± 0.2
				$4 < L \leq 16$ ± 0.3
				$16 < L \leq 63$ ± 0.4
				$L > 63$ ± 0.5



DSND	SCALE: N/A
DWN	VIEW:
CHKD	UNIT: mm/in
APPD	SIZE: A4

MODEL TYPE:	SLIDE SWITCH	
PART NO.:	SS-12M12XX	
DWG NO.:		
WEIGHT	SHEET	REVISIC
	1/1	A0

XKB INDUSTRIAL PRECISION CO., LIMITED