
TRIPP-LITE

4-Outlet Vertical Power Strip, 2-15A & 2-20A, 120V, 15 ft. (4.57 m) Cord, 5-20P, 12 in.

MODEL NUMBER: PS120420

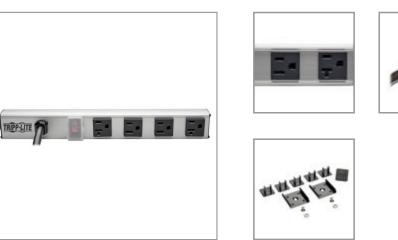

The P120420 power strip provides horizontal or vertical power distribution for rackmount, raceway and workbench applications in a convenient 12-in. mountable housing.

Description

The PS120420 provides a 20-amp, 120v power strip with 2 standard NEMA 5-15 outlets and 2 NEMA 5-20R outlets in a rugged, all-metal, mountable housing. It allows for both vertical and horizontal mounting, making it ideal for a variety of uses including office, rackmount, workbench, industrial and telecom applications. With a NEMA 5-20P, 15-ft. (4.57 m) power cord, you don't have to install the PS120420 next to outlets you already have; it can be mounted across the room and deliver reliable service where you need it most. A lighted and covered On/Off switch helps prevent accidental shut-offs, while a 20-amp circuit breaker guards against dangerous circuit overloads. Its sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

Features

Multi-Outlet Power Distribution

Vertical or Horizontal Mounting

Extra Long Power Cord

Premium Safety Features

Heavy-Duty Housing

Specifications

OVERVIEW	
UPC Code	037332186126

Highlights

- Ideal for applications needing multiple convenience outlets for powering a variety of electronic equipment
- 12-in. mountable housing with 2 NEMA 5-15R and 2 NEMA 5-20R outlets and a 15-ft. (4.57 m) power cord
- Lighted, covered On/Off switch and 20-amp circuit breaker
- Sturdy construction and heavyduty, all-metal housing

Package Includes

- PS120420
- Mounting hardware
- Instruction manual

TRIPP-LITE

INPUT		
Nominal Input Voltage(s) Supported	120V AC	
Recommended Electrical Service	20A 120V	
Input Cord Gauge Type	12 gauge; SJT	
Voltage Compatibility (VAC)	120	
Input Plug Type	NEMA 5-20P	
Input Cord Length (ft.)	15	
Right-Angle Plug	No	
Input Cord Length (m)	4.57	
Integrated Cord Clip	No	
OUTPUT		
Frequency Compatibility	60 Hz	
Output Receptacles	(2) 5-15R; (2) 5-20R	
Circuit Breaker (amps)	20	
Transformer Accommodation	(2) Yes	
Right-Angle Outlets	No	
Outlet Spacing	1.77 in center to center.	
USER INTERFACE, ALERTS & CON	TROLS	
Switches	Lighted 2 position switch controls power to all outlets	
Locking Switch Cover	Transparent on/off switch cover prevents accidental turn-off	
PHYSICAL		
Color	Silver	
Material of Construction	Aluminum	
Power Cord Color	Black	
Form Factors Supported	Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications	
Housing Color	Silver	
Included Mounting Accessories	Includes mounting clips	
Mounting Holes or Slots	No	
Outlets Measurement (Center to Center)	1.77 in.	
Receptacle Color	Black	
Shipping Dimensions (hwd / in.)	3.70 x 6.00 x 15.70	
Shipping Dimensions (hwd / cm)	9.40 x 15.24 x 39.88	

TRIPP-LITE

Shipping Weight (lbs.)	3.60	
Shipping Weight (kg)	1.63	
Unit Dimensions (hwd / in.)	1.250 x 1.620 x 12.000	
Unit Dimensions (hwd / cm)	4.21 x 6.34 x 15.6	
Unit Weight (lbs.)	2.75	
Unit Weight (kg)	1.25	
Outlet Spacing	1.77 in.	
FEATURES & SPECIFICATIONS		
Antimicrobial	No	
Built-In Circuit Breaker	Yes	
STANDARDS & COMPLIANCE		
Product Certifications	cUL Listed; UL 1363; UL Listed	
Product Compliance	RoHS	
WARRANTY & SUPPORT		
Product Warranty Period (Worldwide)	Lifetime limited warranty	



© 2023 Eaton. All Rights Reserved. Eaton is a registered trademark. All other trademarks are the property of their respective owners.