

Electronic Components for Power Supplies and LED Lighting



www.yageo.com

About Yageo



Founded in 1977, the Yageo Corporation has become a world-class provider of passive component services with capabilities on a global scale, including production and sales facilities in Asia, Europe and the Americas.

Yageo currently ranks as the world No.1 in chip-resistors, No. 3 in MLCCs and No. 4 in ferrite products, with a strong global presence: 21 sales offices in 15 countries, 9 production sites, 8 JIT logistic hubs, and 2 R&D centers worldwide. Ferroxcube and Vitrohm, who produce ferrites and leaded resistors, are also a part of the Yageo group.

We support our customers with extensive literature including datasheets, brochures and application notes, which are also available electronically on our website at: www.yageo.com

Table of Contents

Introduction.....	3
Component Solutions.....	4
Recommended Products.....	6
Product Information - Chip Resistors.....	10
Product Information - MLCCs.....	13



Introduction

Enabling High-efficiency Power Electronics

Power supplies require passive components to lower overall energy consumption, must be highly stable under fluctuations in temperature, and must support noise suppression. Leading in SMD technology, Yageo's chip resistors, leaded resistors, and multilayer ceramic and electrolytic capacitors meet the needs of power electronics requirements for energy-saving, reliability, smaller footprints and lower costs. They are well-suited to applications such as switching power supplies, lighting ballasts and LED drivers, DC/DC converters, AC/DC power modules, and battery management.

Yageo current sensing chip resistors help with current measurement in low voltage power and battery management for circuit control, protection, monitoring, and performance enhancement. Anti-surge chip resistors are good for power dissipation and surge protection capabilities. Safety-certified MLCCs are AC-rated, high-voltage capacitors designed for surge and impulse protection. High-voltage MLCCs are capable of operating at high-voltage levels in power transmitting and receiving devices or equipment.




Requirements for Power Supplies and LED Lighting


- High Power Rating
- Low TCR
- Low Thermal EMF
- IEC-60950 (Safety certification)
- High Capacitance for Transient Input
- High Ripple Current, Low ESR
- Optimized Thermal Performance
- Long Life, High Reliability
- Current Detection
- EMI Filtering
- Safety Approvals (TUV & UL standard-certified)
- IEC-60065 (Qualified for high voltage chip resistors)

Component Solutions


1. Basic Topology of Power Supplies

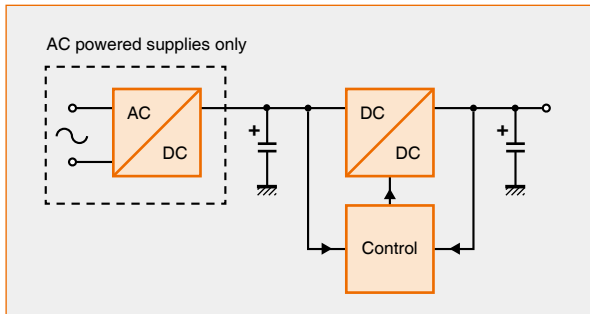

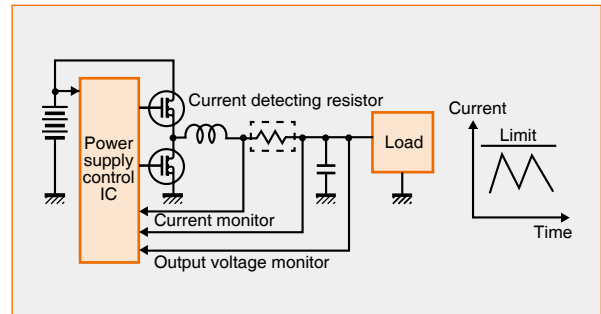


2. DC/DC Converter Circuit



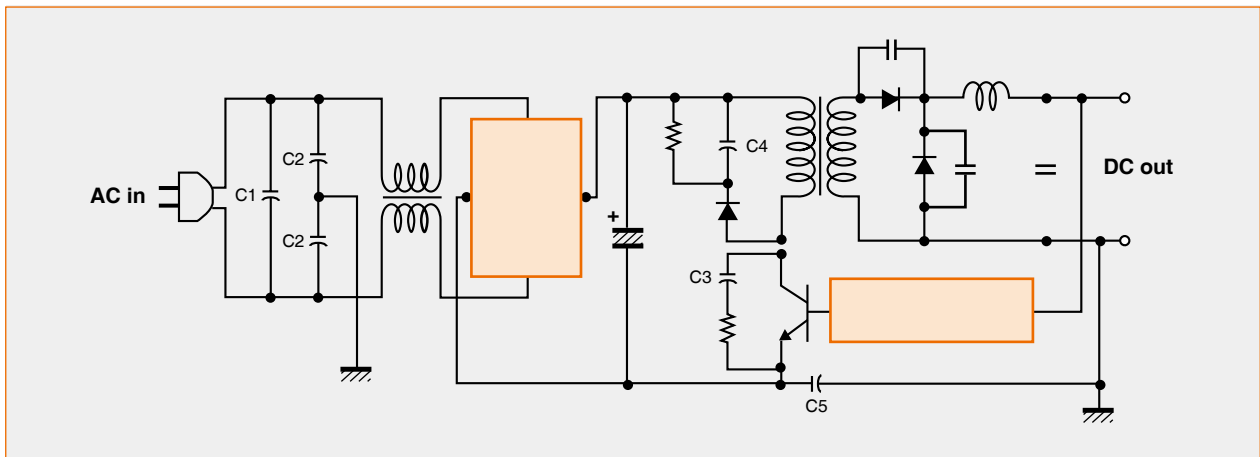

3. Switching Power Supplies




Resistors

-  RT series: RT0201 ~ RT2512 (5.1Ω~1.5MΩ)
-  PE series: PE0402 ~ PE4527 (1mΩ~910mΩ)
-  PA/PR series: PR1206 ~ PA2512 (0.5mΩ~5mΩ)




MLCC

-  CC series: CC0402 ~ CC1206 (50V~1kV)
-  SC series: SC1808, 1812 (X1/Y2, X2/Y3)

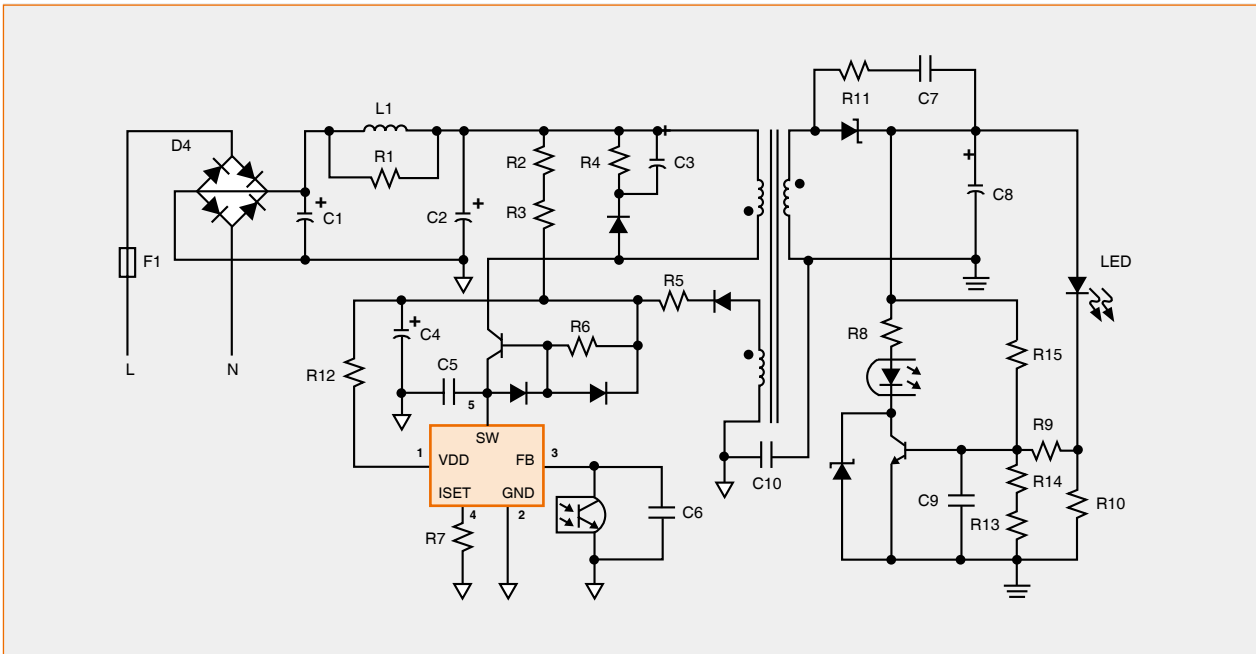

4. LED Lighting



Resistors

-  PE series: PE0402 ~ PE4527 (1mΩ~910mΩ)
-  SR series: SR0402 ~ SR2512 (1Ω~100KΩ)
-  PR/PA series: PR1206 ~ PA2512 (0.5mΩ~5mΩ)

MLCC

-  CC series: CC0402 ~ CC1206 (50V~1kV)
-  SC series: SC1808, 1812 (X1/Y2, X2/Y3)

Recommended Products

Thin Film Precision Chip Resistors - RT Series



Features & Benefits

- High reliability: 40°C/95%RH, 1000h $\Delta R < \pm 0.5\%$
- High heat resistance: 155°C, 1000h $\Delta R < \pm 0.5\%$
- Tolerances: $\pm 0.05\%$, $\pm 0.1\%$, $\pm 0.25\%$, $\pm 0.5\%$, $\pm 1\%$
- T.C.R.: ± 10 ppm/°C, ± 15 ppm/°C, ± 25 ppm/°C, ± 50 ppm/°C
- Sizes: 0201, 0402, 0603, 0805, 1206, 1210, 2010, 2512
- For signal conditioning, computing servers

Low-Ohmic Current Sensors - PE/PR/PA Series



Features & Benefits

- Low TCR and high precision
- Ultra low ohmic down to 0.001Ω
- High power rating
- PE Size: 0402, 0603, 0805, 1206, 2010, 2512, 4527
- Wide terminal: 0306, 0508, 0612, 0815, 0830, 1225
- PR Size: 1206, 2010
- PA Size: 2512
- Low thermal EMF

High Voltage Chip Resistors - RV Series



Features & Benefits

- High maximum working voltage (MWV)
- Reliable electrode construction
- Compatible with lead containing and lead free soldering processes
- Highly stable in auto-placement surface mounting
- Sizes: 0603, 0805, 1206, 2010, 2512
- Power supplies & battery chargers

Surge Chip Resistors - SR Series



Features & Benefits

- Excellent performance at pulse loading
- High power rating & ESD resistance
- High reliability & stability
- Sizes: 0402, 0603, 0805, 1206, 1210, 1218, 2010, 2512
- For converters, industrial applications

Sulfur Resistant Chip Resistors - AF Series



Features & Benefits

- Superior resistance against sulfur containing environment
- FOS test: ASTM-B-809-95
- Sizes: 0201, 0402, 0603, 0805, 1206, 1210, 1218, 2010, 2512
- Computing servers, base stations

High Capacitance MLCCs



Features & Benefits

- Materials: X5R, X7R and Y5V
- Sizes: 0402 to 1812
- Capacitance from 1 μ F to 100 μ F
- Rated working voltage from 6.3V to 50V
- Inverters, UPS, medical equipment

High Voltage MLCCs (≥ 100 V)



Features & Benefits

- Materials: NP0 and X7R
- <Common High Voltage Series>
- Sizes: 0603 to 1812, voltage from 100V to 3kV
 - High DC withstanding voltage (≥ 1.2 V Rated)
- <Safety Certification Series>
- TUV certification for 1808 and 1812 size (X1/Y2 & X2/Y3)
 - UL certification for 1808 and 1812 size (X1/Y2)
 - Noise Suppression, Primary-secondary coupling

MLV (Multi-Layer Varistor)



Features & Benefits

- Excellent clamping voltage & energy dissipation capability
- Quick response time (<1n sec.)
- Adjustable capacitance values
- High transient current capability
- Symmetrical voltage-current characteristics
- ESD protection, LED lighting

Recommended Products

Screw Type Aluminum Electrolytic Capacitors*



Features & Benefits

- High ripple current, large power source, converter circuit, etc.
- Long life, wide temperature (up to 5,000 hours at 105°C)
- Low leakage current
- Industrial & power applications


Snap-in Aluminum Electrolytic Capacitors*



Features & Benefits

- Ideally suitable for using in switching power supplies and other industrial/commercial applications
- Long life, wide temperature up to 7,000 hours at 105°C
- For printed circuit board, high performance
- Smoothing circuit, TV, monitor, adapter, SMPS

Miniature Aluminum Electrolytic Capacitors*

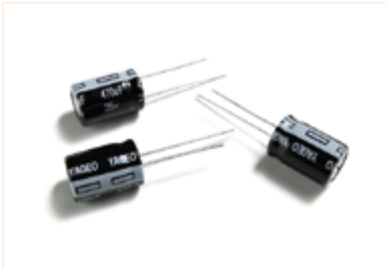

Features & Benefits

- Low impedance, low ESR
- Long life, wide temperature up to 10,000 hours at 105°C
- High frequency applications
- Switching regulator, LED street lighting applications

Chip & PCB Antennas*



Features & Benefits

- Embedded antenna with moderate gain and efficiency performance
- Ultra compact available in different sizes for various applications
- Surface mount, meet the compact and low-profile requirements
- Omni directional radiation, suitable for short-range wireless applications

Note: * For Electrolytic Capacitors and Chip Antennas, please refer to www.yageo.com for detailed information.

High Voltage/Ohmic Through-hole Resistors - HHV Series*



Features & Benefits

- Metal glazed film
- Higher power rating
- Higher working voltage
- High pulse loading capability
- Resistance to high temp/humidity
- Highly stable performance and highly reliable
- Flameproof multilayer coating (UL94V-0)
- Power & industrial applications

Wirewound Through-hole Resistors - PNP/PNPV Series*



Features & Benefits

- Ultra miniature size
- Higher power rating
- Wide resistance range
- Low TCR
- Highly stable performance and highly reliable
- Flameproof multilayer coating (UL94V-0)
- Suitable for automatic machine insertion

Aluminium Housed Resistors – AHB Series



Features & Benefits

- Heatsink mounted type
- Reduced size
- Aluminum case are corrugated for added strength and power dissipation
- Higher power rating & wider resistance range
- Anti-corrosion/good performance at severe environment
- Power & Industrial applications

Trapezium Aluminum Housed Resistors Compact Size – AHC Series



Features & Benefits

- Higher power rating & wider resistance range
- Anti-surge
- Anti-corrosion
- Compact size
- Energy discharge application
- Power & Industrial segment

Product Information - Chip Resistors

Electrical characteristics												
Global part number	Series	Size	Power rating	Max. voltage	Operating Temp. range	Resistance range	Tolerance	T. C. R.				
RT0201xRx07xxxxL	RT	0201	1/20W	25V	-55°C to 125°C	22Ω ≤ R ≤ 33KΩ	±0.1% ±0.25% ±0.5% ±1% (E24/E96)	±25 ppm/°C ±50 ppm/°C				
RT0402xRx07xxxxL		0402	1/16W	50V	-55°C to 155°C	10Ω ≤ R ≤ 121KΩ	±0.05% ±0.1% ±0.25% ±0.5% ±1% (E24/E96)	±10 ppm/°C ±15 ppm/°C ±25 ppm/°C ±50 ppm/°C				
RT0603xRx07xxxxL		0603	1/10W	75V		5.1Ω ≤ R ≤ 681KΩ						
RT0805xRx07xxxxL		0805	1/8W	150V		5.1Ω ≤ R ≤ 1.5MΩ						
RT1206xRx07xxxxL		1206	1/4W	200V	-55°C to 125°C	5.1Ω ≤ R ≤ 1.5MΩ						
RT1210xRx07xxxxL		1210	1/4W			5.1Ω ≤ R ≤ 1MΩ						
RT2010xKx07xxxxL		2010	1/2W			10Ω ≤ R ≤ 1MΩ						
RT2512xKx07xxxxL		2512	3/4W			10Ω ≤ R ≤ 1MΩ						
PR1206xKx07xxxxxx	PR	1206	1/4W	(PxR) ^{1/2}	-55°C to 170°C	1mΩ ≤ R ≤ 4mΩ			±1% ±2% ±5%	±50 ppm/°C		
PR1206xKx7Wxxxxxx			1/2W									
PR1206xKx47xxxxxx			1W									
PR2010xKx07xxxxxx		2010	1/2W			1mΩ ≤ R < 4mΩ						
PR2010xKx7Wxxxxxx			1W									
PA2512xKF07xxxxL	PA	2512	1W	(PxR) ^{1/2}	-55°C to 155°C	1mΩ ≤ R ≤ 5mΩ	±1% ±5%	±100 ppm/°C				
PA2512xKF7WxxxxL			2W									
PA2512xKF7TxxxxL			3W									
PE0306xRM07xxxxZ	PE (Wide)	0306	1W	(PxR) ^{1/2}	-55°C to 170°C	5mΩ ≤ R ≤ 100mΩ	±1% ±2% ±5%	±75 ppm/°C ±100 ppm/°C				
PE0508xRM07xxxxZ		0508	1.2W			3mΩ ≤ R ≤ 100mΩ						
PE0612xKx7Wxxxxxx		0612	2W			1mΩ ≤ R ≤ 300mΩ						
PE0815xKx7Wxxxxxx		0815	1W			1mΩ ≤ R ≤ 100mΩ						
PE0830xKx7Wxxxxxx		0830	3W			1mΩ ≤ R ≤ 100mΩ						
PE1225xKM7WxxxxZ		1225	3W			1mΩ ≤ R ≤ 100mΩ						
PE0402xRx47xxxxxx		PE	0402			1/4W		(PxR) ^{1/2}	-55°C to 170°C	10mΩ ≤ R ≤ 50mΩ	±1% ±2% ±5%	±100 ppm/°C
PE0603xRx57xxxxxx			0603			1/2W				5mΩ ≤ R ≤ 100mΩ		
PE0805xRx47xxxxxx			0805			1/2W				4mΩ ≤ R ≤ 100mΩ		
PE1206xxx47xxxxxx			1206			1W				4mΩ ≤ R ≤ 100mΩ		
PE2010xKx7Wxxxxxx	2010		1W	5mΩ ≤ R ≤ 100mΩ								
PE2512xKx7Wxxxxxx	2512		2W	6mΩ ≤ R ≤ 100mΩ								
PE4527xKx7Wxxxxxx	4527		3W	5mΩ ≤ R ≤ 910mΩ								
												±50 ppm/°C ±75 ppm/°C ±100 ppm/°C



Electrical characteristics

Global part number	Series	Size	Power rating	Max. voltage	Operating Temp. range	Resistance range	Tolerance	T. C. R.						
SR0402xR-07xxxxL	SR	0402	1/16W	50V	-55°C to 155°C	1Ω ≤ R ≤ 100KΩ	±5% ±10% ±20%	±200 ppm/°C						
SR0402xR-7WxxxxL			1/8W											
SR0603xR-07xxxxL		0603	1/10W	50V										
SR0603xR-7WxxxxL			1/5W											
SR0805xR-07xxxxL		0805	1/8W	150V										
SR0805xR-7WxxxxL			1/4W											
SR1206xR-07xxxxL		1206	1/4W	200V										
SR1206xR-7WxxxxL			1/2W											
SR1210xR-07xxxxL		1210	1/2W	200V										
SR1218xK-07xxxxL		1218	1W	200V										
SR2010xK-07xxxxL		2010	3/4W	200V										
SR2512xK-07xxxxL		2512	1W	200V										
RV0603xR-07xxxxL	RV	0603	1/10W	350V	-55°C to 155°C	10KΩ ≤ R ≤ 10MΩ	±1%	±200 ppm/°C						
RV0805xR-07xxxxL		0805	1/8W	400V		100KΩ ≤ R ≤ 10MΩ	±5%							
RV1206xR-07xxxxL		1206	1/4W	500V		100KΩ ≤ R ≤ 27MΩ	Max.: 10MΩ ±1% Max.: 27MΩ ±5%							
RV2010xKx-07xxxxL						2010	3/4W			100KΩ ≤ R ≤ 10MΩ	±1%, ±5%			
RV2512JK-07xxxxL		2512	1W	4.7MΩ ≤ R ≤ 16MΩ		±5%								
AF0201xR-07xxxxL	AF	0201	1/20W	25V	-55°C to 125°C	1Ω ≤ R ≤ 10MΩ Jumper < 50mΩ	±1% ±5%	1Ω ≤ R ≤ 10Ω 10Ω < R ≤ 10MΩ	-100/+350 ppm/°C ±200 ppm/°C					
AF0402xRx-07xxxxL		0402	1/16W	50V	-55°C to 155°C	1Ω ≤ R ≤ 22MΩ Jumper < 50mΩ	Max: 10MΩ ±1% Max: 22MΩ ±5%	1Ω ≤ R ≤ 10Ω 10Ω < R ≤ 10MΩ 10MΩ < R ≤ 22MΩ	±200 ppm/°C ±100 ppm/°C ±200 ppm/°C					
AF0603xRx-07xxxxL		0603	1/10W	50V										
AF0805xRx-07xxxxL		0805	1/8W	150V										
AF1206xRx-07xxxxL		1206	1/4W	200V										
AF1210xRx-07xxxxL		1210	1/2W	200V										
AF1218xKx-07xxxxL		1218	1W	200V										
AF2010xKx-07xxxxL		2010	3/4W	200V										
AF2512xKx-07xxxxL		2512	1W	200V										
AF122-xR-07xxxxL		2*0402	1/16W	50V						-55°C to 125°C	1Ω ≤ R ≤ 1MΩ	±1%	1Ω ≤ R ≤ 10Ω	±250 ppm/°C
AF124-xR-07xxxxL		4*0402	1/16W	25V						-55°C to 155°C	Jumper < 50mΩ	±5%	10Ω < R ≤ 1MΩ	±200 ppm/°C

Product Information - Chip Resistors

Ordering Code Definition

RT 0603 D R E 07 56R L

Series name (code 1-2)

RT = Thin film high precision high stability
 PR/PA/PE = Current sensor - low T. C. R.
 SR = Surge
 RV = High voltage
 AF = Sulfur Resistant

Size code (code 3-6)

(inch / metric)
 0201 = 0.6 x 0.3
 0306 = 0.8 x 1.6
 0402 = 1.0 x 0.5
 0508 = 1.25 x 2.0
 0603 = 1.6 x 0.8
 0612 = 1.6 x 3.2
 0805 = 2.0 x 1.25
 0815 = 2.15 x 3.75
 0830 = 2.0 x 7.5
 1206 = 3.2 x 1.6
 1210 = 3.2 x 2.6
 1218 = 3.2 x 4.5
 1225 = 3.2 x 6.35
 2010 = 5.0 x 2.5
 2512 = 6.35 x 3.2
 4527 = 11.0 x 7.0

Tolerance (code 7)

W = $\pm 0.05\%$
 B = $\pm 0.1\%$
 C = $\pm 0.25\%$
 D = $\pm 0.5\%$
 F = $\pm 1\%$
 G = $\pm 2\%$
 J = $\pm 5\%$ (for AF Jumper ordering)

Packing style (code 8)

R = Paper tape reel
 K = Embossed plastic tape reel

Default code (code 17)

L / Z = Default code

Resistance (code 12-16)

0R = Jumper
 0R01 = 0.01 Ω
 0R1 = 0.1 Ω
 1R = 1 Ω
 10R = 10 Ω
 100R = 100 Ω
 1K = 1 000 Ω
 1M = 1 000 000 Ω
 100M = 100 000 000 Ω

Taping reel (code 10-11)

07 = 7 inch Dia. reel
 13 = 13 inch Dia. reel
 7W = 7 inch Dia. reel
 2 x standard power type
 7T = 7 inch Dia. reel
 3 x standard power type
 47 = 7 inch Dia. reel
 4 x standard power type
 57 = 7 inch Dia. reel
 5 x standard power type

T. C. R. (code 9)

B = ± 10 ppm/ $^{\circ}$ C (on request)
 C = ± 15 ppm/ $^{\circ}$ C (on request)
 D = ± 25 ppm/ $^{\circ}$ C
 E = ± 50 ppm/ $^{\circ}$ C
 M = ± 75 ppm/ $^{\circ}$ C
 F = ± 100 ppm/ $^{\circ}$ C
 G = ± 200 ppm/ $^{\circ}$ C
 “—” = Based on spec.
 (— for SR/RV/AF only)

Note: Please contact with sales office, distributors and representatives in your region before ordering.



Product Information - MLCCs

Electrical characteristics						
Global part number	Size	TC	Operating Temp range	Capacitance range	Voltage range	Tolerance
CC0201xxNPOxxxxxx	0201	NPO	-55°C to 125°C	10pF~100pF	50V	±5%
CC0201xxX7Rxxxxxx		X7R	-55°C to 125°C	100pF~10nF	10V~50V	±10%, ±20%
CC0201xxX5Rxxxxxx		X5R	-55°C to 85°C	100pF~1µF	4V~50V	±10%, ±20%
CC0402xxNPOxxxxxx	0402	NPO	-55°C to 125°C	10pF~1nF	50V~100V	±5%
CC0402xxX7Rxxxxxx		X7R	-55°C to 125°C	100pF~1µF	6.3V~50V	±10%, ±20%
CC0402xxX5Rxxxxxx		X5R	-55°C to 85°C	100pF~10µF	6.3V~50V	±10%, ±20%
CC0603xxNPOxxxxxx	0603	NPO	-55°C to 125°C	10pF~4.7nF	50V~250V	±5%
CC0603xxX7Rxxxxxx		X7R	-55°C to 125°C	100pF~4.7µF	10V~100V	±10%, ±20%
CC0603xxX5Rxxxxxx		X5R	-55°C to 85°C	100pF~22µF	6.3V~50V	±10%, ±20%
CC0805xxNPOxxxxxx	0805	NPO	-55°C to 125°C	10pF~10nF	50V~1000V	±5%
CC0805xxX7Rxxxxxx		X7R	-55°C to 125°C	220pF~10µF	10V~500V	±10%, ±20%
CC0805xxX5Rxxxxxx		X5R	-55°C to 85°C	220pF~47µF	6.3V~50V	±10%, ±20%
CC1206xxNPOxxxxxx	1206	NPO	-55°C to 125°C	10pF~33nF	50V~2000V	±5%
CC1206xxX7Rxxxxxx		X7R	-55°C to 125°C	220pF~22µF	6.3V~2000V	±10%, ±20%
CC1206xxX5Rxxxxxx		X5R	-55°C to 85°C	220pF~100µF	6.3V~50V	±10%, ±20%
CC1210xxNPOxxxxxx	1210	NPO	-55°C to 125°C	10pF~22nF	50V~2000V	±5%
CC1210xxX7Rxxxxxx		X7R	-55°C to 125°C	2.2nF~1µF	6.3V~500V	±10%, ±20%
CC1210xxX5Rxxxxxx		X5R	-55°C to 85°C	2.2nF~100µF	6.3V~50V	±10%, ±20%
CC1808xxNPOxxxxxx	1808	NPO	-55°C to 125°C	10pF~4.7nF	100V~3000V	±5%
CC1808xxX7Rxxxxxx		X7R	-55°C to 125°C	3.3nF~100nF	100V~3000V	±10%, ±20%
CC1812xxNPOxxxxxx	1812	NPO	-55°C to 125°C	10pF~22nF	50V~3000V	±5%
CC1812xxX7Rxxxxxx		X7R	-55°C to 125°C	1nF~1µF	50V~3000V	±10%, ±20%
SC1808xxNPOxxxxxx	SC1808	NPO	-55°C to 125°C	4.7pF~1nF	X1/Y2, X2/Y3	±5%
SC1808xxX7Rxxxxxx		X7R	-55°C to 125°C	150pF~1.5nF	X1/Y2, X2/Y3	±10%
SC1812xxNPOxxxxxx	SC1812	NPO	-55°C to 125°C	15pF~470pF	X1/Y2, X2/Y3	±5%
SC1812xxX7Rxxxxxx		X7R	-55°C to 125°C	220pF~1.5nF	X1/Y2, X2/Y3	±10%

Ordering Code Definition

CC 0201 K R X7R 8 B B 102

Series name (code 1-2)

CC = Multilayer chip capacitors
SC = Safety certification capacitors

Size code (code 3-6)

(inch / metric)
0201 = 0.6 × 0.3
0402 = 1.0 × 0.5
0603 = 1.6 × 0.8
0805 = 2.0 × 1.25
1206 = 3.2 × 1.6
1210 = 3.2 × 2.6
1808 = 4.5 × 2.0
1812 = 4.5 × 3.2

Tolerance (code 7)

B = ±0.1 pF
C = ±0.25 pF
D = ±0.5 pF
F = ±1%
G = ±2%
J = ±5%
K = ±10%
M = ±20%

Packing style (code 8)

R = Paper / PE tape reel Ø7 inch
P = Paper / PE tape reel Ø13 inch
K = Embossed plastic tape reel Ø7 inch
F = Embossed plastic tape reel Ø13 inch
C = Bulk case

TC material (code 9-11)

NP0
X5R
X7R
Y5V

Capacitance value (code 15-17)

102 = 1 000 pF
(2 significant digits+number of zeros;
the 3rd digit signifies the multiplying
factor, and letter R is decimal point)
0 = × 1
1 = × 10¹
2 = × 10²
3 = × 10³
4 = × 10⁴
5 = × 10⁵
6 = × 10⁶
7 = × 10⁷
X X R = Special capacitance
(X X: capacitance before decimal point)

Process code (code 14)

N = NP0
B = Class 2 product

Termination (code 13)

B = Ni-Barrier

Rated voltage (code 12)

5 = 6.3 V
6 = 10 V
7 = 16 V
8 = 25 V
9 = 50 V
0 = 100 V
A = 200 V
B = 500 V
C = 1 kV
D = 2 kV
E = 3 kV
G = 35 V
S = 2.5 kV
T = X2 / Y3 for TUV / UL
W = X1 / Y2 for TUV / UL
Y = 250 V
Z = 630 V



Customer Support & Distribution Network

We bring to the market a proven innovative tradition and a commitment to service second to none.

Yageo sales representatives are available to visit you to discuss the technical and commercial issues appropriate to your project or requirement. Customer service can initiate new orders, change orders, request air shipments or drop shipments, product samples, and generally support your business on a day to day basis.

Our sales/services offices are strategically located to serve our customers worldwide and our international distributor network improves our product availability, delivery lead time and our service anywhere in the world.

Please see the back cover for contact details of your local Yageo organization.

We support our customers with extensive literature including datasheets, brochures and application notes, which are also available electronically on our website at: **www.yageo.com**

In addition, our field application engineers constantly strive wherever possible, to work closely with customers to aid them with design-in and provide them with the support they need to remain competitive in their markets.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") are subject to change without notice.

All Information given herein is believed to be accurate and reliable, but is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute -and we specifically disclaim-any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Although we design and manufacture our products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

YAGEO - A GLOBAL COMPANY

HQ

Taipei, Taiwan
Tel. +886 2 6629 9999
Fax. +886 2 6628 8886
Mail: sales_tw@yageo.com

China and ASIA

Suzhou, China

Tel. +86 512 6825 5568
Fax. +86 512 6825 5386
Mail: sales_sz@yageo.com

Qingdao, China

Tel. +86 532 8797 0533
Fax. +86 532 8797 0533
Mail: sales_sq@yageo.com

Dongguan, China

Tel. +86 769 8772 0275
Fax. +86 769 8791 0053
Mail: sales_dg@yageo.com

Tokyo, Japan

Tel. +81 3 6809 3972
Fax. +81 3 6809 3982
Mail: sales_yj@yageo.com

Seongnam, Korea

Tel. +82 31 712 4797
Fax. +82 31 712 5866
Mail: sales_yk@yageo.com

Singapore

Tel. +65 6244 7800
Fax. +65 6244 4943
Mail: sales_ysa@yageo.com

Kuala Lumpur, Malaysia

Tel. +60 3 8063 8864
Fax. +60 3 8063 7376
Mail: sales_ysa@yageo.com

Penang, Malaysia

Tel. +60 4 3973049
Fax. +60 4 3973050
Mail: sales_ysa@yageo.com

EUROPE

Munich, Germany

Tel. +49 8990 7784 380
Fax. +49 8990 7784 379
Mail: sales_ym@yageo.com

Milan, Italy

Tel. +39 02 6129 1017
Fax. +39 02 6601 7490
Mail: sales_ym@yageo.com

Roermond, Benelux

Tel. +31 475 385 555
Fax. +31 475 385 589
Mail: sales_ym@yageo.com

Szombathely, Hungary

Tel. +36 94 517 702
Fax. +36 94 517 701
Mail: sales_ym@yageo.com

Moscow, Russian Federation

Tel. +7 965 408 1811
Fax. +7 498 610 0707
Mail: sales_ym@yageo.com

NORTH AMERICA

San Jose, U.S.A.

Tel. +1 408 240 6200
Fax. +1 408 240 6201
Mail: sales_ya@yageo.com

Mexico

Tel. +52 33 31330631
Fax. +1 408 240 6201
Mail: sales_ya@yageo.com

For a complete listing of all Yageo sales offices, distributors, and representatives, please visit "contact us" at www.yageo.com

© YAGEO Corporation

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.