

Window 5

Tr 11 NF LogM 5.000dB/ 30.0dB

Tr 12 SC21 LogM 1.000dB/ 25.0dB

Tr 62 DUTRNPI LogM 5.000dB/ 45.0dB

Tr 63 SYSRNPI LogM 5.000dB/ 45.0dB

55.00

30.00

50.00

29.00

45.00

28.00

40.00

27.00

35.00

26.00

30.00

25.00

25.00

24.00

20.00

23.00

15.00


22.00

10.00

21.00

5.00

20.00

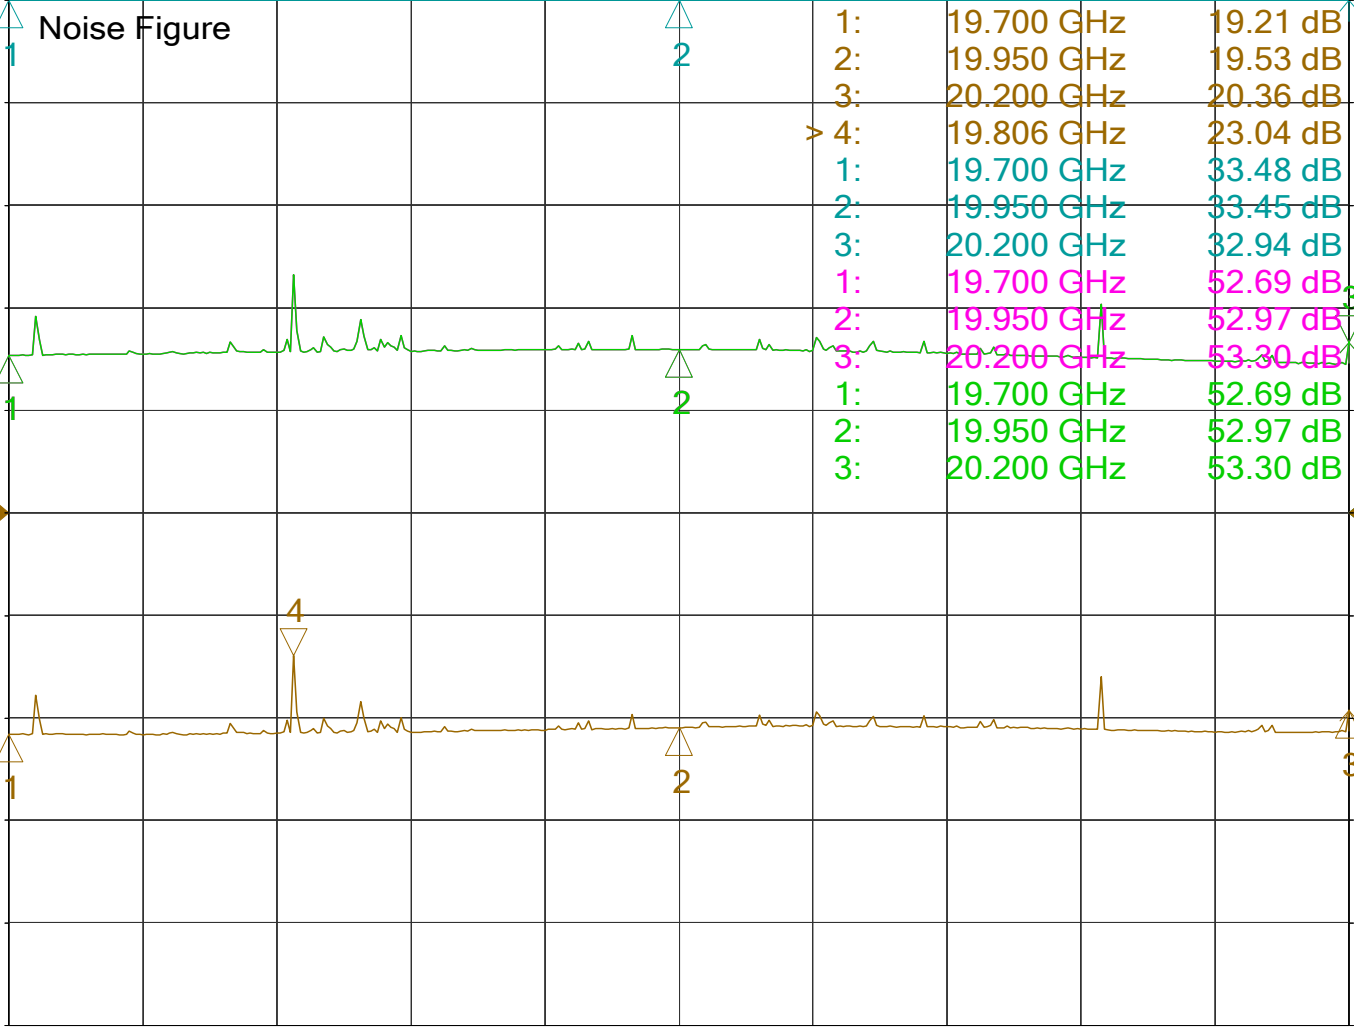

1: 19.700 GHz 19.21 dB 70.00

2: 19.950 GHz 19.53 dB 70.00

3: 20.200 GHz 20.36 dB 65.00

> 4: 19.806 GHz 23.04 dB 65.00

1: 19.700 GHz 33.48 dB 60.00

2: 19.950 GHz 33.45 dB 60.00

3: 20.200 GHz 32.94 dB 60.00

1: 19.700 GHz 52.69 dB 55.00

2: 19.950 GHz 52.97 dB 55.00

3: 20.200 GHz 53.30 dB 50.00

1: 19.700 GHz 52.69 dB 50.00

2: 19.950 GHz 52.97 dB 50.00

3: 20.200 GHz 53.30 dB 45.00

45.00

40.00

35.00

30.00

30.00

25.00

25.00

20.00

>Ch9: NF⊗ Start 19.7000 GHz — — — Stop 20.2000 GHz

## Channel Settings

Channel	Sweep Type	Points	Start (GHz)	Stop (GHz)	IF BW (kHz)	Sweep Time (s)	Pow 1 (dBm)	Pow 2 (dBm)	Pow 3 (dBm)	Pow 4 (dBm)	Pow 5 (dBm)	Pow 6 (dBm)
9	LinFreq	401	28.000000	28.500000	1.000000	0.370123	-40.000000	-20.000000	-5.000000	-5.000000	-30.000000	11.950000

## Trace Attributes

Window	ID	Trace	Channel	Correction	Marker	Position	Response
5	1	NF	9		1	19700 MHz	19.207 dB
					2	19950 MHz	19.526 dB
					3	20200 MHz	20.357 dB
					4	19806.25 MHz	23.042 dB
5	2	SC21	9		1	19700 MHz	33.481 dB
					2	19950 MHz	33.449 dB
					3	20200 MHz	32.943 dB
5	3	DUTRNPI	9		1	19700 MHz	52.688 dB
					2	19950 MHz	52.975 dB
					3	20200 MHz	53.300 dB
5	4	SYSRNPI	9		1	19700 MHz	52.688 dB
					2	19950 MHz	52.975 dB
					3	20200 MHz	53.300 dB