


P.C.B. LAYOUT

SPECIFICATIONS:

Current Rating : 3AMP
 Insulator Resistance: 1000Megohms min
 Voltage Rating: AC 500V
 Operating Temperature: -40°~+85°
 Max Processing Temp: 220° for 3~5 seconds
 Contact Material: Brass
 Insulator Material: PBT Black UL94V-0
 Plating: G/F/ Plated over Nickel

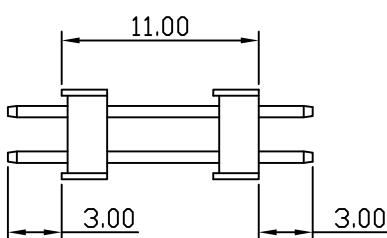

Contacts Per Row	Dimensions		Contacts Per Row	Dimensions	
	A	B		A	B
2*1pin	2.54	0	2*21pin	53.34	50.80
2*2pin	5.08	2.54	2*22pin	55.88	53.34
2*3pin	7.62	5.08	2*23pin	58.42	55.88
2*4pin	10.16	7.62	2*24pin	60.96	58.42
2*5pin	12.70	10.16	2*25pin	63.50	60.96
2*6pin	15.24	12.70	2*26pin	66.04	63.50
2*7pin	17.78	15.24	2*27pin	68.58	66.04
2*8pin	20.32	17.78	2*28pin	71.12	68.58
2*9pin	22.86	20.32	2*29pin	73.66	71.12
2*10pin	25.40	22.86	2*30pin	76.20	73.66
2*11pin	27.94	25.40	2*31pin	78.74	76.20
2*12pin	30.48	27.94	2*32pin	81.28	78.74
2*13pin	33.02	30.48	2*33pin	83.82	81.28
2*14pin	35.56	33.02	2*34pin	86.36	83.82
2*15pin	38.10	35.56	2*35pin	88.90	86.36
2*16pin	40.64	38.10	2*36pin	91.44	88.90
2*17pin	43.18	40.64	2*37pin	93.98	91.44
2*18pin	45.72	43.18	2*38pin	96.52	93.98
2*19pin	48.26	45.72	2*39pin	99.06	96.52
2*20pin	50.80	48.26	2*40pin	101.6	99.06

toppt 深圳市鑫冠辉电子有限公司

一般公差 COMMON TOLERANCES	图号 DWG. NAME	绘图 FLOI	比例 SCALE
X	XGH-DWG-A3611	LXW	1:1
X.X	料号 PART NO.	审核 CHECKED	单位 UNIT
X.XX	PH1-H240-2-SBB-G0	LYYAN	MM
X.XXX	品名 TITLE	核准 APPROVED	版次 REV.
ANGLE	PH2.54 2*40P 双塑180度 PA3.0 PC3.0 L=17.0	日期 DATE	页次 SHEET
	THIRD ANGLE PROJECTION:	2019-02-18	1/1
			图幅 SIZE
			A4

编号 DWG. NO.	标记 REV. LTR.	日期 DATE	变更内容 REVISION NOTES	签名 SIGN

