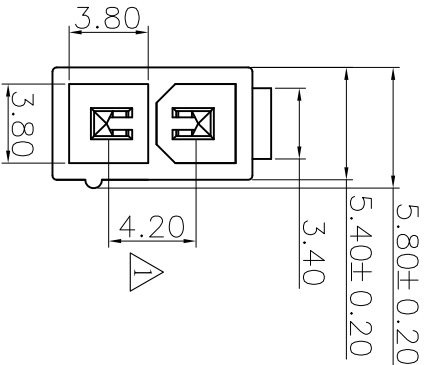


P.C.B. LAYOUT

SPECIFICATIONS:

1、 MATERIAL:

HOUSING:PA66 UL94 V-2

COLOR:TRANSPARENT

CONTACT:BRASS SQ=1.14MM

2 FINISH:

CONTACTS:100U” MIN. BRIGHT-TIN ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 50U”
MIN. NICKEL

3、 ELECTRICAL STRUCTURE:

CURRENT RATING:7A


VOLTAGE RATING:250V AC MAX

CONTACT RESISTANCE:20MΩ MAX

INSULATION RESISTANCE:1000MΩ MIN

WITHSANDI NG VOLTAGE:1500V AC/MINUTE

TEMPERATURE RANGE:-25° C TO+85° C

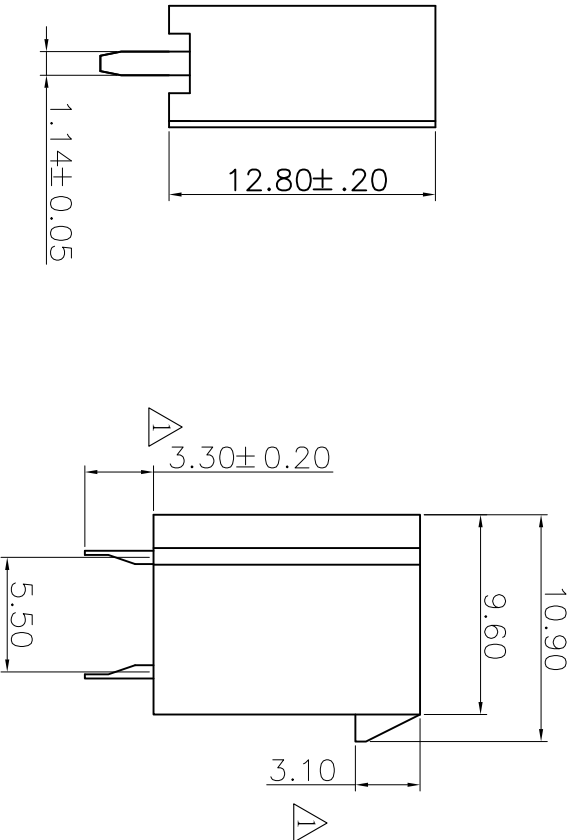

topot 深圳市鑫冠辉电子有限公司

一般公差 COMMON TOLERANCES		图号 DWG. NAME	绘图 FLOT	比例 SCALE
X.	±0.30	料号 PART NO.	审核 CHECKED	单位 UNIT
X.X	±0.25	品名 TITLE	核准 APPROVED	版次 REV.
X.XX	±0.20	ATX4.2 2*1P 180度 PC=3.3		页次 SHEET
X.XXX	±0.15		日期 DATE	图幅 MMS
ANGLE	±°	THIRD ANGLE PROJECTION:	2019-02-20	A4

编号 DWG. NO.	标记 REV. LTR.	日期 DATE	更新图面尺寸 REVISION NOTES	签名 SIGN	版次 REV.
	△	19-1-19		LXW	A.2