


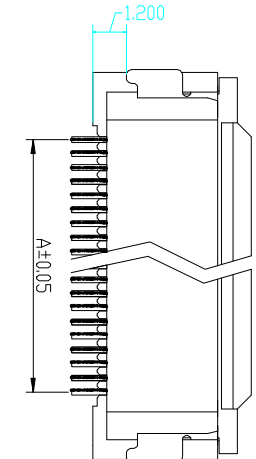





客户确认

日期

技术参数 SPECIFICATIONS
间距 (Pitch) : 0.5
极数 (Poles) : 4~60
额定电压 (Voltage rating): 50V DC/AC
额定电流 (Current rating) : 0.4A DC/AC
耐压值 (Withstand Voltage) : 500VAC/m
工作温度 (Working Temperature) :
-25℃~+85℃
绝缘电阻 (Insulation Resistance) : ≥500MΩ
接触电阻 (Contact resistance) : ≤30mΩ
单面接触 (Single contact)

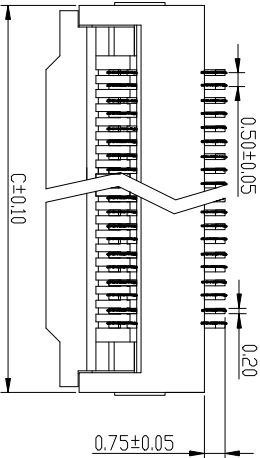

装配示意图

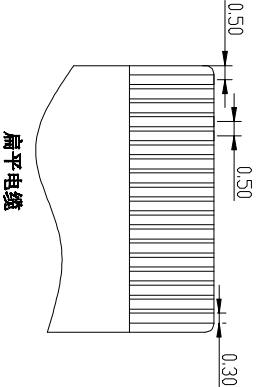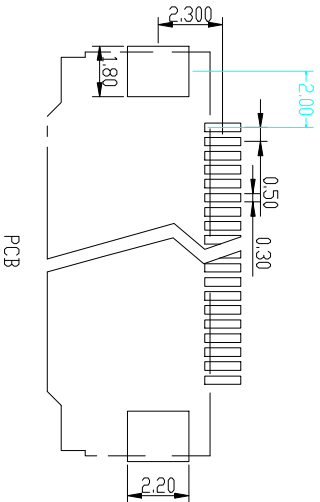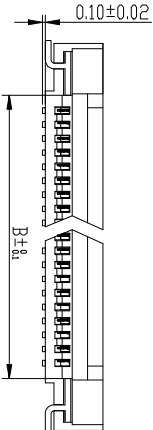

扁平电缆

CKT	DimA	DimB	DimC	CKT	DimA	DimB	DimC
004	1.50	2.60	6.30	033	16.00	17.10	20.80
005	2.00	3.10	6.80	034	16.50	17.60	21.30
006	2.50	3.60	7.30	035	17.00	18.10	21.80
007	3.00	4.10	7.80	036	17.50	18.60	22.30
008	3.50	4.60	8.30	037	18.00	19.10	22.80
009	4.00	5.10	8.80	038	18.50	19.60	23.30
010	4.50	5.60	9.30	039	19.00	20.10	23.80
011	5.00	6.10	9.80	040	19.50	20.60	24.30
012	5.50	6.60	10.30	041	20.00	21.10	24.80
013	6.00	7.10	10.80	042	20.50	21.60	25.30
014	6.50	7.60	11.30	043	21.00	22.10	25.80
015	7.00	8.10	11.80	044	21.50	22.60	26.30
016	7.50	8.60	12.30	045	22.00	23.10	26.80
017	8.00	9.10	12.80	046	22.50	23.60	27.30
018	8.50	9.60	13.30	047	23.00	24.10	27.80
019	9.00	10.10	13.80	048	23.50	24.60	28.30
020	9.50	10.60	14.30	049	24.00	25.10	28.80
021	10.00	11.10	14.80	050	24.50	25.60	29.30
022	10.50	11.60	15.30	051	25.00	26.10	29.80
023	11.00	12.10	15.80	052	25.50	26.60	30.30
024	11.50	12.60	16.30	053	26.00	27.10	30.80
025	12.00	13.10	16.80	054	26.50	27.60	31.30
026	12.50	13.60	17.30	055	27.00	28.10	31.80
027	13.00	14.10	17.80	056	27.50	28.60	32.30
028	13.50	14.60	18.30	057	28.00	29.10	32.80
029	14.00	15.10	18.80	058	28.50	29.60	33.30
030	14.50	15.60	19.30	059	29.00	30.10	33.80
031	15.00	16.10	19.80	060	29.50	30.60	34.30
032	15.50	16.60	20.30				

材料 Material

接触件 (Contact) : 磷青铜 t=0.20 镀亚锡Phosphor Bronze Tin-plated
焊片 (solder tab) : 黄铜 t=0.20 镀亚锡 Dark Penter Tin-plated
塑胶主体 (Housing) : 耐热树脂 LCP (UL94V-0) Heat resistance plastic (UL94V-0)
锁条 (Slider) : 耐热树脂 LCP (UL94V-0) Heat resistance plastic (UL94V-0)

APPROVED:

DATE:

CHECKED:

DATE:

DRAWN:

YRR

DATE:

2015-12-01

TITLE:

FPCO. 5-24P 卧贴 翻盖式

CLIENT P/N

G4190953

UNIT

mm

SCALE

free

REV.

A

FILE NO.

XPB03570007

深圳市鑫鹏博电子科技有限公司

SHEZHEN XINPENGBO ELECTRONICS CO. LTD

TOLERANCE TABLE

.0

±0.20

.00

±0.10

.000

±0.05