
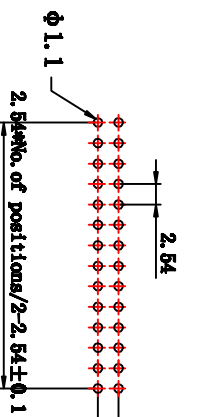

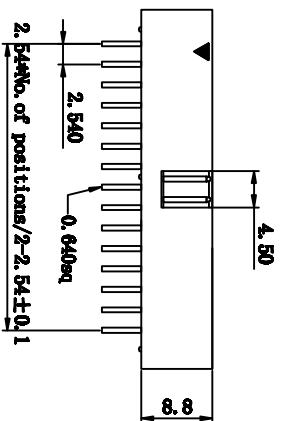


客户确认	
日期	

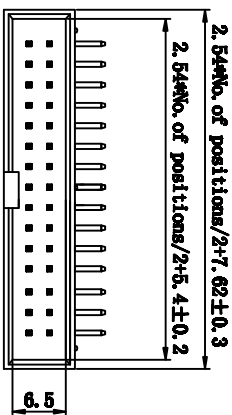


PCB LAYOUT

Material
 Insulator: P. B. T. +30% Glass Fibre Or Nylon-6T (UL 94V-0)
 Contact: Brass
 Contact Plated: Gold

Specification
 Current Rating: 3A
 Contact Resistance: 15mΩ Max.
 Insulation Resistance: 1000MΩ Min. at 500V DC
 Dielectric Withstanding Voltage: 500V AC for 1 Minute
 Operating Temperature: -55° C +105° C

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	 深圳市鑫鹏博电子科技有限公司 SHENZHEN XINPENGBO ELECTRONICS CO. LTD
CHECKED:	DATE:	
DRAWN:	DATE:	
YRR	2017-03-30	
CLIENT P/N	G4190918	
UNIT	mm	SCALE
FILE NO.	XPB03570029	Free
REV.	A	

TITLE:
300R-2x15P (2.54弯插筒牛) (足金0.8U)