

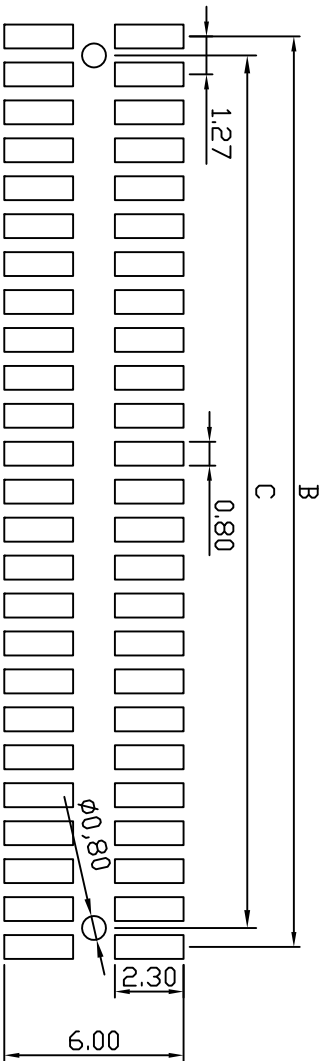
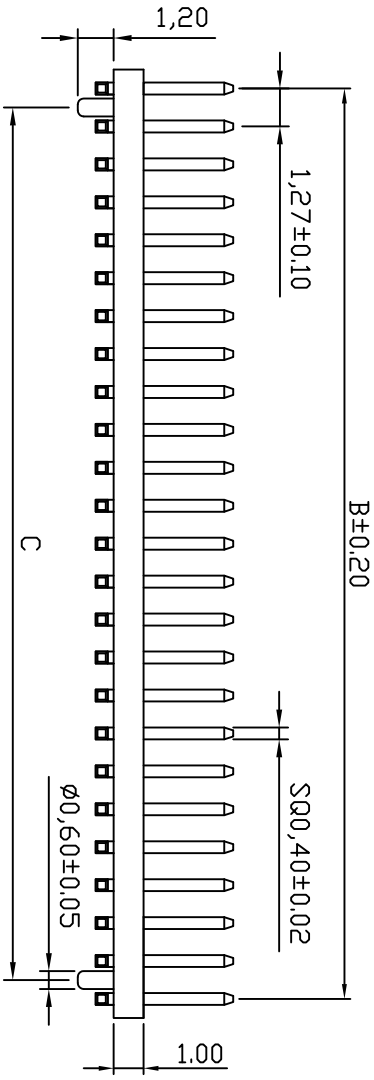


ROHS环保

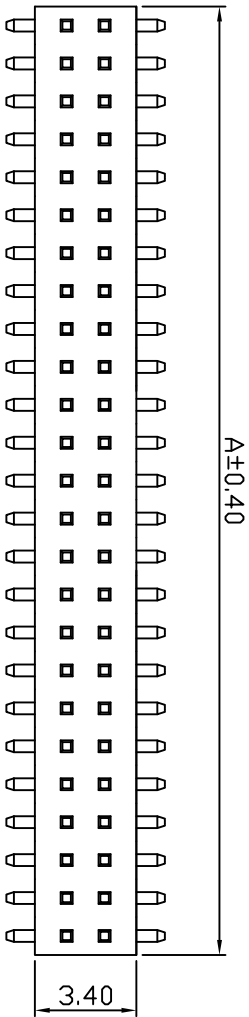

SPECIFICATIONS:

Current Rating:	1AMP
Insulator Resistance:	1000Megohms min
Voltage Rating:	AC 300V
Operating Temperature:	-40° ~+105°
Max Processing Temp:	260° for 3~5 seconds
Contact Material:	Brass
Insulator Material:	PA6T Black
Plating:	G/F Plated over Nickel

Contacts Per Row	Dimensions			Contacts Per Row	Dimensions		
	A	B	C		A	B	C
2*2P	0.00	0.00	0.00	2*26P	33.02	31.75	30.48
2*2P	2.54	1.27	0.00	2*27P	34.29	33.02	31.75
2*3P	3.81	2.54	1.27	2*28P	35.56	34.29	33.02
2*4P	5.08	3.81	2.54	2*29P	36.83	35.56	34.29
2*5P	6.35	5.08	3.81	2*30P	38.10	36.83	35.56
2*6P	7.62	6.35	5.08	2*31P	39.37	38.10	36.83
2*7P	8.89	7.62	6.35	2*32P	40.64	39.37	38.10
2*8P	10.16	8.89	7.62	2*33P	41.91	40.64	39.37
2*9P	11.43	10.16	8.89	2*34P	43.18	41.91	40.64
2*10P	12.70	11.43	10.16	2*35P	44.45	43.18	41.91
2*11P	13.97	12.70	11.43	2*36P	45.72	44.45	43.18
2*12P	15.24	13.97	12.70	2*37P	46.99	45.72	44.45
2*13P	16.51	15.24	13.97	2*38P	48.26	46.99	45.72
2*14P	17.78	16.51	15.24	2*39P	49.53	48.26	46.99
2*15P	19.05	17.78	16.51	2*40P	50.80	49.53	48.26
2*16P	20.32	19.05	17.78	2*41P	52.07	50.80	49.53
2*17P	21.59	20.32	19.05	2*42P	53.34	52.07	50.80
2*18P	22.86	21.59	20.32	2*43P	54.61	53.34	52.07
2*19P	24.13	22.86	21.59	2*44P	55.88	54.61	53.34
2*20P	25.40	24.13	22.86	2*45P	57.15	55.88	54.61
2*21P	26.67	25.40	24.13	2*46P	58.42	57.15	55.88
2*22P	27.94	26.67	25.40	2*47P	59.69	58.42	57.15
2*23P	29.21	27.94	26.67	2*48P	60.96	59.69	58.42
2*24P	30.48	29.21	27.94	2*49P	62.23	60.96	59.69
2*25P	31.75	30.48	29.21	2*50P	63.50	62.23	60.96

topot 深圳市鑫冠辉电子有限公司

P.C.B LAYOUT

编号	XGH-DWG-A927	标记	日期	变更内容	签名
DWG.NO.		REV. LTR.	DATE	REVISION NOTES	SIGN
1	2	3	4	5	6

一般公差 COMMON TOLERANCES		图号 DWG. NAME		成品图 FLOT		比例 SCALE	
X.X	±0.30	料号 PART NO.	PH3-N250-P-TAB-G0	审核 CHECKED	LYYAN	单位 UNIT	MM
X.XX	±0.25	品名 TITLE	排针 1.27*1.0 2*50P SMT 带柱 展开5.3 L=6.2mm 6T 加CAP	核准 APPROVED		版次 REV.	A.1
X.XXX	±0.15	THIRD ANGLE PROJECTION:		日期 DATE	2019-02-18	页次 SHEET	01
ANGLE	±2°			图幅 MMS	A4		