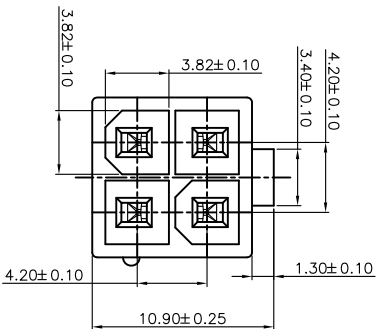


P.C.B. LAYOUT

SPECIFICATIONS:

1、 MATERIAL:

HOUSING:PA66 UL94 V-2

CONTACT:BRASS

2 FINISH:

CONTACTS:100U” MIN. BRIGHT-TIN ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 50U”
MIN. NICKEL

3、 ELECTRICAL STRUCTURE:

CURRENT RATING:7A



VOLTAGE RATING:250V AC MAX

CONTACT RESISTANCE:20MΩ MAX

INSULATION RESISTANCE:1000MΩ MIN

WITHSANDI NG VOLTAGE:1500V AC/MINUTE

TEMPERATURE RANGE:-25° C TO+85° C

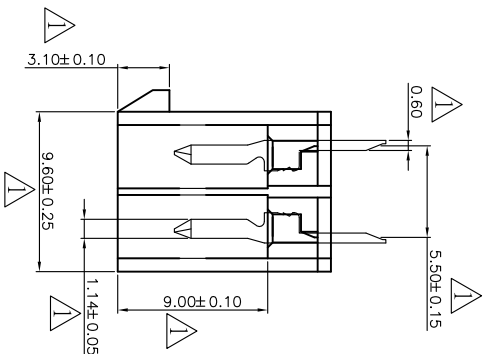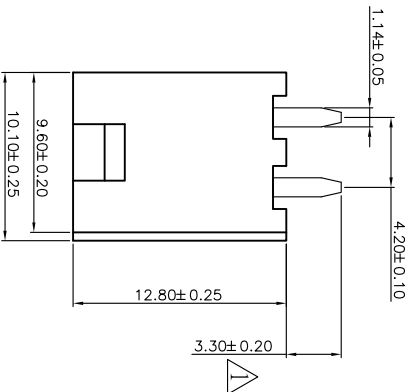

topot 深圳市鑫冠辉电子有限公司

一般公差 COMMON TOLERANCES		图号 DWG. NAME	成品图	绘图 FLOT	比例 SCALE	1:1
X.	±0.30	料号 PART NO.	AT2-1202-S6T-B0	审核 CHECKED	单位 UNIT	MM
X.X	±0.25	品名 TITLE	ATY4.2 2*2P 180度 PC=3.3mm 透明无柱	核准 APPROVED	版次 REV.	A.3
X.XX	±0.20			日期 DATE	页次 SHEET	01
X.XXX	±0.15	THIRD ANGLE PROJECTION:		2019-02-20	图幅 MARS	A4
ANGLE	±2°					

编号 DWG.NO.	XGH-DWG-A62	标记 REV. LTR.	日期 DATE	更新图面料号,增加尺寸	签名 SIGN	版次 REV.
			18-12-03		LXW	A.3
				变更内容 REVISION NOTES		