

Single Phase 1.0Amp Glass passivated Bridge Rectifiers

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Idea for printed circuit board
- ◆ Glass passivated Junction chip
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed
250°C/10 seconds at terminals

Mechanical Data


Case: Molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Polarity symbol marking on body

Mounting Position: Any

Weight : 0.008 ounce, 0.22 grams

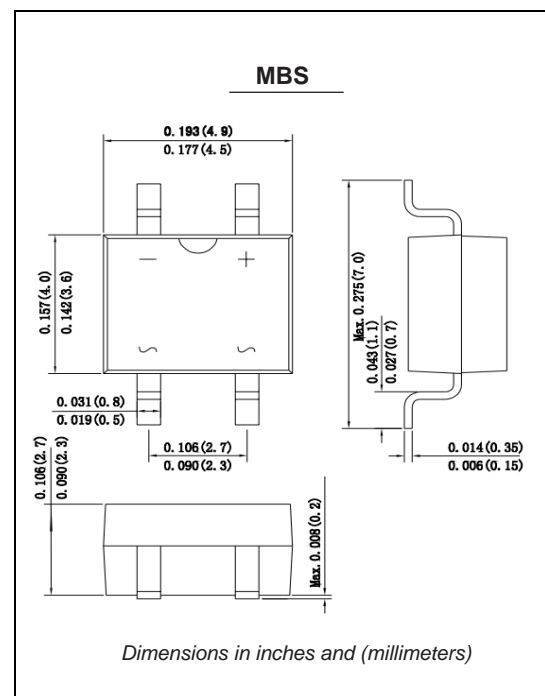

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_L=30^\circ C$ On glass-epoxy P.C.B (Note 1)	I_{AV}	1.0						Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	35.0						Amps
Maximum instantaneous forward voltage at 1.0A	V_F	1.0						Volts
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=125^\circ C$	I_R	5.0 500						μA
Typical junction capacitance (Note 2)	C_J	25.0						pF
Typical thermal resistance	R_{qJA}	55.0						$^\circ C/W$
Operating junction and storage temperature range	T_J, T_{STG}	-50 to +155						$^\circ C$

Note: 1. Mounted on glass epoxy PC board with 1.3*1.3mm solder pad

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

Ratings And Characteristic Curves

MB1S THRU MB10S

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

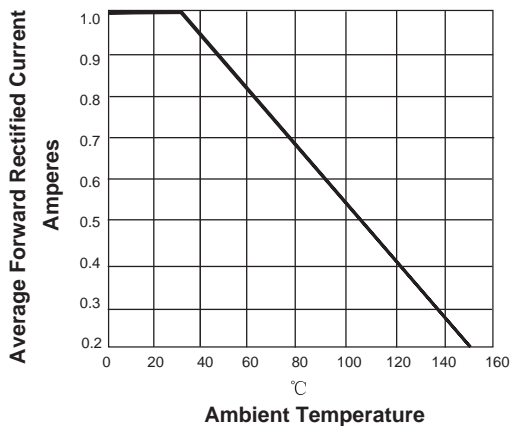


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

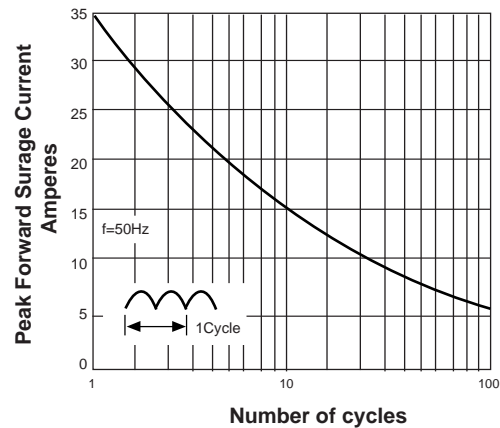


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

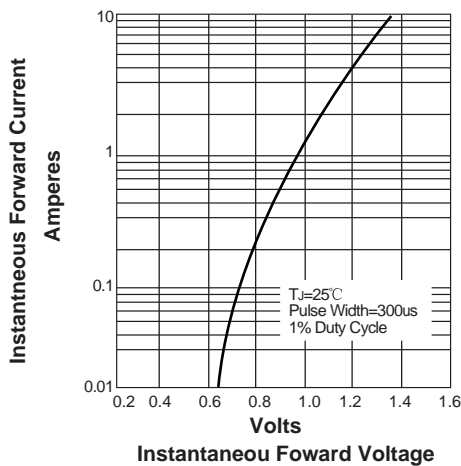


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

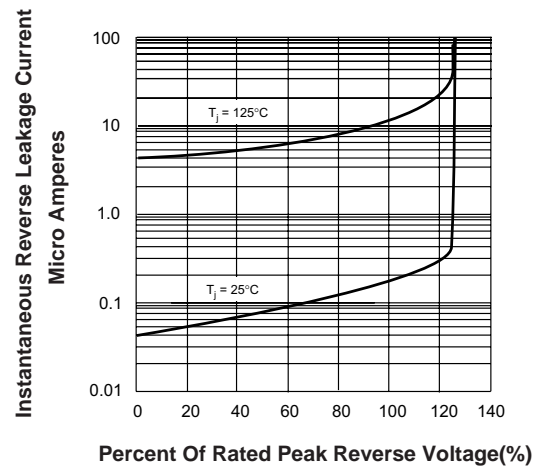


FIG. 5-TYPICAL JUNCTION CAPACITANCE

