
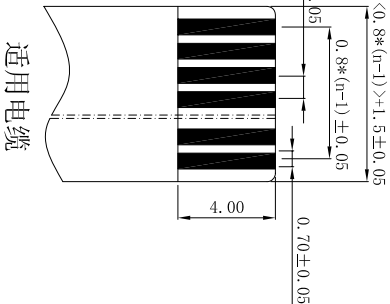

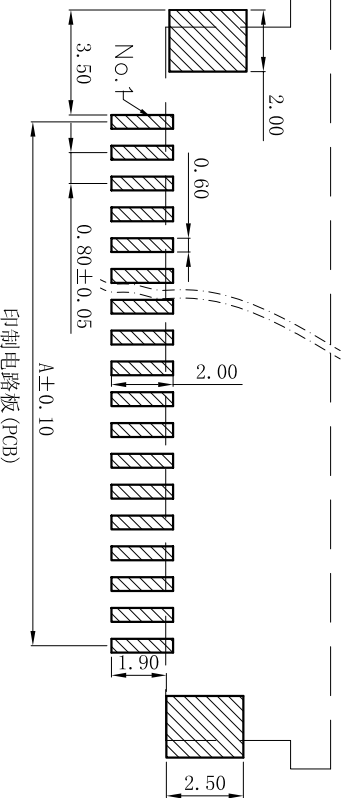


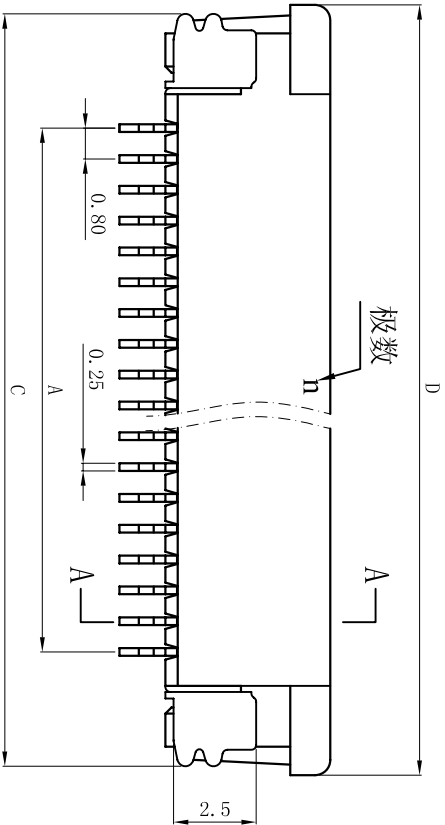


PITCH 0.8mm FPC CONNECTOR SMT TYPE

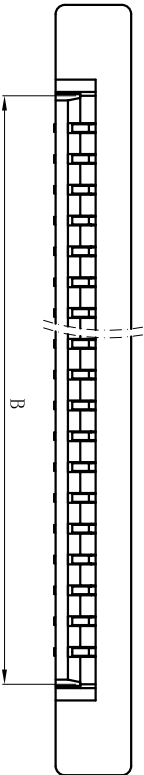

适用电缆

孔位	A	B	C	D
4	2.4	4	9.6	10.3
5	3.2	4.8	10.4	11.1
6	4	5.6	11.2	11.9
7	4.8	6.4	12	12.7
8	5.6	7.2	12.8	13.5
9	6.4	8	13.6	14.3
10	7.2	8.8	14.4	15.1
11	8	9.6	15.2	15.9
12	8.8	10.4	16	16.7
13	9.6	11.2	16.8	17.5
14	10.4	12	17.6	18.3
15	11.2	12.8	18.4	19.1
16	12	13.6	19.2	19.9
17	12.8	14.4	20	20.7
18	13.6	15.2	20.8	21.5
19	14.4	16	21.6	22.3
20	15.2	16.8	22.4	23.1
21	16	17.6	23.2	23.9
22	16.8	18.4	24	24.7
23	17.6	19.2	24.8	25.5
24	18.4	20	25.6	26.3
25	19.2	20.8	26.4	27.1
26	20	21.6	27.2	27.9
27	20.8	22.4	28	28.7
28	21.6	23.2	28.8	29.5
29	22.4	24	29.6	30.3
30	23.2	24.8	30.4	31.1
31	24	25.6	31.2	31.9
32	24.8	26.4	32	32.7
33	25.6	27.2	32.8	33.5
34	26.4	28	33.6	34.3
35	27.2	28.8	34.4	35.1

性能:

额定电流: 0.4A

额定电压: 50V

耐电压: 200V

接触电阻: <20mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

印制电路板(PCB)

塑件 (材质): LCP, UL94V-0
锁扣 (材质): LCP, UL94V-0
插簧 (材质): 磷青铜, 镀锡/镀金
焊片 (材质): 磷青铜, 镀锡/镀金

NAME (INTENDED USE)		UNITS	
0.8mm FPC (B型) 半包下接有焊片 (H=2.5)		mm	
X ± 0.3	X° ± 5°		
.X ± 0.25	.X° ± 2°	MATERIAL	
.XX ± 0.20	.XX° ± 1°		
.XXX ± 0.10	.XXX° ± 0.5°	FINISH	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		Q'TY	
		CHKD:	
		DRC:	
		DATE: Y12.2011.09.28	

深圳市钜硕电子有限公司

TITLE: 0.8mm FPC (B型) 半包下接有焊片 (H=2.5)

AWG NO.: AFCC08-S**F**+00

SCALE	SHEET	REV.
1/1	1/1	A