

CERAMIC SMD ULTRA MINIATURE QUARTZ CRYSTAL



2.5 x 2.0 x 0.5 mm

ABM10

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable **Pb** | RoHS/RoHS II Compliant

FEATURES:

- 2.5 x 2.0 x 0.5mm ultra miniature package
- Suitable for RoHS reflow profile
- Tight stability available ± 10 ppm over -10 to +60°C
- Seam sealed ceramic package assures high precision and reliability

APPLICATIONS:

- Blue-tooth, Wireless applications
- Computers, Modems, Microprocessors
- Communication, Test equipment
- High density applications
- PCMCIA
- Portable radios and MP3 players


STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	12.000		55.000	MHz	Fundamental
Operation Mode	Fundamental				
Operating Temperature	-10		+60	°C	See options
Storage Temperature	-40		+125	°C	
Frequency Tolerance @+25°C			± 20	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)			± 30	ppm	See options
Equivalent series resistance (R1)	See table 1 below				
Shunt capacitance (C0)			7	pF	
Load capacitance (CL)	10			pF	Standard (See options if other than STD)
Drive Level		10	100	μ W	
Aging@25°C ± 3 °C			± 5	ppm	First year
Insulation Resistance	500			M Ω	@ 100Vdc ± 15 V

Table 1 – standard ESR

Frequency (MHz)	ESR(Ω) max.
12.000 – 15.999	250
16.000 – 19.999	150
20.000 – 29.999	100
30.000 – 55.000	70

OPTIONS & PART IDENTIFICATION: (Left blank if standard)

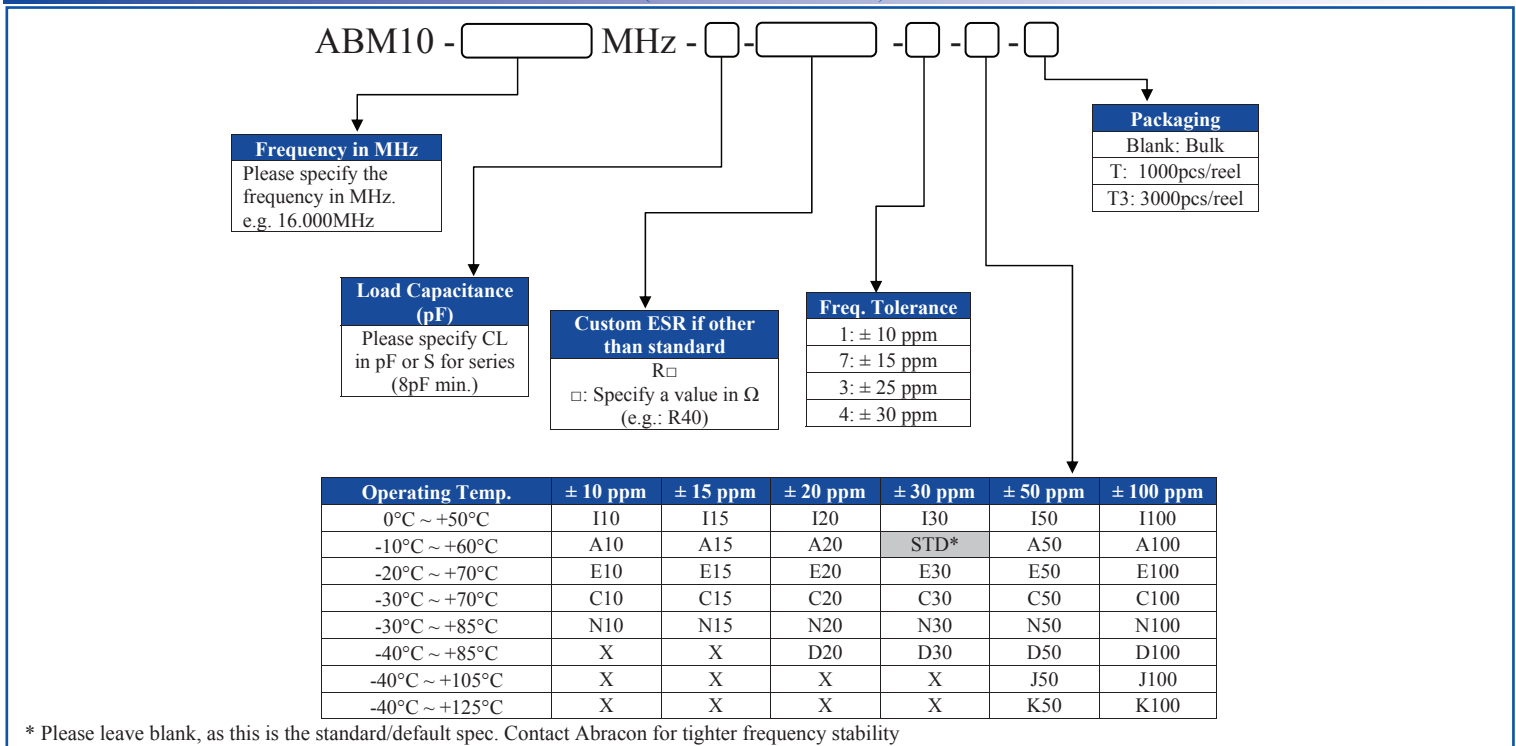

* Please leave blank, as this is the standard/default spec. Contact Abracon for tighter frequency stability

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ABM10-48.000MHZ-E20-T](#) [ABM10-20.000MHZ-E20-T](#) [ABM10-40.000MHZ-E20-T](#) [ABM10-27.000MHZ-E20-T](#)
[ABM10-30.000MHZ-E20-T](#) [ABM10-25.000MHZ-E20-T](#) [ABM10-24.000MHZ-E20-T](#) [ABM10-22.1184MHZ-E20-T](#)
[ABM10-24.576MHZ-E20-T](#) [ABM10-24.000MHZ-8-7A15-T](#) [ABM10-28.63636MHZ-8-7A15-T](#) [ABM10-32.000MHZ-8-](#)
[7A15-T](#) [ABM10-26.000MHZ-7-A15-T](#) [ABM10-32.000MHZ-7-A15-T](#) [ABM10-40.000MHZ-8-7A15-T](#) [ABM10-](#)
[19.200MHZ-E20-T](#) [ABM10-18.432MHZ-E20-T](#) [ABM10-16.384MHZ-E20-T](#) [ABM10-16.000MHZ-E20-T](#) [ABM10-](#)
[16.3676MHZ-E20-T](#) [ABM10-16.000MHZ-D30-T3](#) [ABM10-16.3676MHZ-D30-T3](#) [ABM10-16.384MHZ-D30-T3](#) [ABM10-](#)
[18.432MHZ-D30-T3](#) [ABM10-19.200MHZ-D30-T3](#) [ABM10-20.000MHZ-D30-T3](#) [ABM10-22.1184MHZ-D30-T3](#) [ABM10-](#)
[24.000MHZ-D30-T3](#) [ABM10-24.576MHZ-D30-T3](#) [ABM10-25.000MHZ-D30-T3](#) [ABM10-26.000MHZ-D30-T3](#) [ABM10-](#)
[27.000MHZ-D30-T3](#) [ABM10-30.000MHZ-D30-T3](#) [ABM10-32.000MHZ-D30-T3](#) [ABM10-40.000MHZ-D30-T3](#) [ABM10-](#)
[48.000MHZ-D30-T3](#) [ABM10-48.000MHz-18-E30-T3](#) [ABM10-24.000MHz-18-E30-T3](#) [ABM10-25.000MHz-18-E30-T3](#)
[ABM10-38.400MHz-18-E30-T3](#) [ABM10-40.000MHz-18-E30-T3](#) [ABM10-14.31818MHz-18-E30-T3](#) [ABM10-16.000MHz-](#)
[18-E30-T3](#) [ABM10-20.000MHz-18-E30-T3](#)