
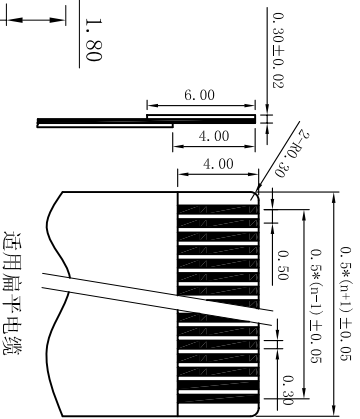




PITCH 0.5mm FPC CONNECTOR SMT TYPE

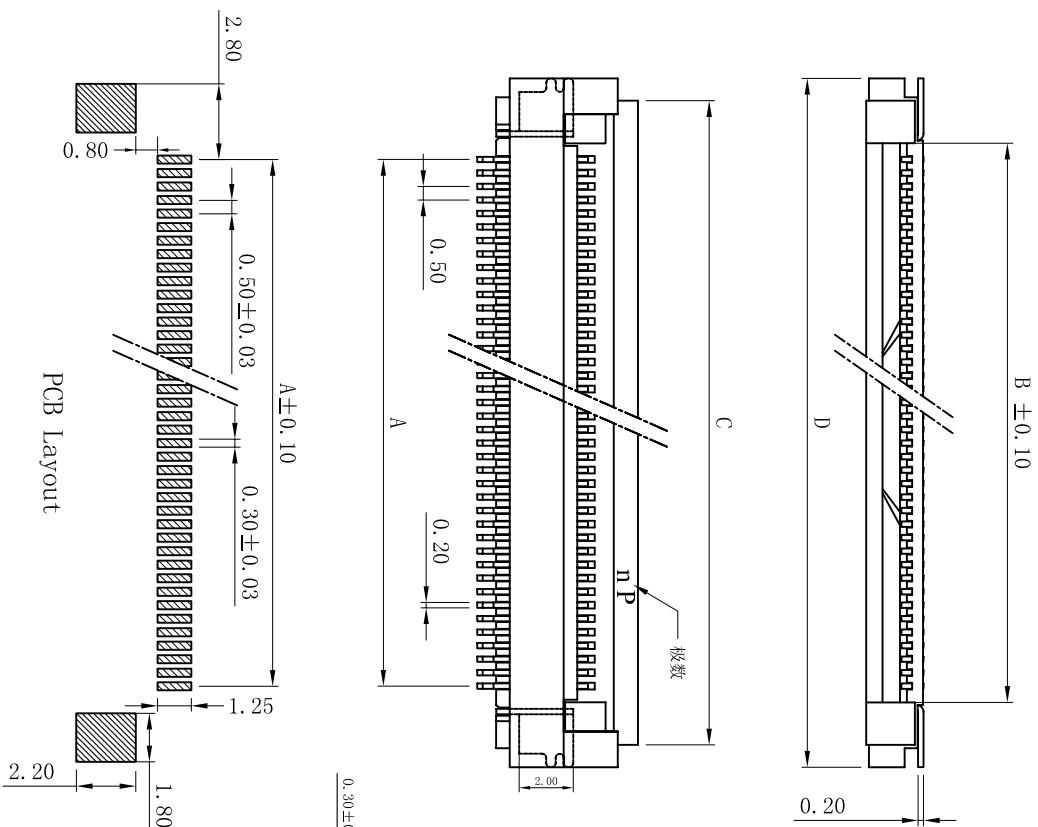

适用扁平电缆

性能:

- 额定电流: 0.4A
- 额定电压: 50V
- 接触电阻: $\leq 20m\Omega$
- 绝缘电阻: 500M Ω
- 工作温度: -20℃~+85℃
- 塑件 (材质): LCP本色, UL94V-0
- 锁扣 (材质): LCP黑色, UL94V-0
- 插簧 (材质): 磷青铜, 镀锡/镀金
- 焊片 (材质): 黄铜, 镀锡/镀金

| 孔位 | A | B | C | D |
|----|-------|-------|-------|-------|
| 4 | 1.50 | 2.60 | 6.00 | 7.40 |
| 5 | 2.00 | 3.10 | 6.50 | 7.90 |
| 6 | 2.50 | 3.60 | 7.00 | 8.40 |
| 7 | 3.00 | 4.10 | 7.50 | 8.90 |
| 8 | 3.50 | 4.60 | 8.00 | 9.40 |
| 9 | 4.00 | 5.10 | 8.50 | 9.90 |
| 10 | 4.50 | 5.60 | 9.00 | 10.40 |
| 11 | 5.00 | 6.10 | 9.50 | 10.90 |
| 12 | 5.50 | 6.60 | 10.00 | 11.40 |
| 13 | 6.00 | 7.10 | 10.50 | 11.90 |
| 14 | 6.50 | 7.60 | 11.00 | 12.40 |
| 15 | 7.00 | 8.10 | 11.50 | 12.90 |
| 16 | 7.50 | 8.60 | 12.00 | 13.40 |
| 17 | 8.00 | 9.10 | 12.50 | 13.90 |
| 18 | 8.50 | 9.60 | 13.00 | 14.40 |
| 19 | 9.00 | 10.10 | 13.50 | 14.90 |
| 20 | 9.50 | 10.60 | 14.00 | 15.40 |
| 21 | 10.00 | 11.10 | 14.50 | 15.90 |
| 22 | 10.50 | 11.60 | 15.00 | 16.40 |
| 23 | 11.00 | 12.10 | 15.50 | 16.90 |
| 24 | 11.50 | 12.60 | 16.00 | 17.40 |
| 25 | 12.00 | 13.10 | 16.50 | 17.90 |
| 26 | 12.50 | 13.60 | 17.00 | 18.40 |
| 27 | 13.00 | 14.10 | 17.50 | 18.90 |
| 28 | 13.50 | 14.60 | 18.00 | 19.40 |
| 29 | 14.00 | 15.10 | 18.50 | 19.90 |
| 30 | 14.50 | 15.60 | 19.00 | 20.40 |
| 31 | 15.00 | 16.10 | 19.50 | 20.90 |
| 32 | 15.50 | 16.60 | 20.00 | 21.40 |
| 33 | 16.00 | 17.10 | 20.50 | 21.90 |
| 34 | 16.50 | 17.60 | 21.00 | 22.40 |
| 35 | 17.00 | 18.10 | 21.50 | 22.90 |
| 36 | 17.50 | 18.60 | 22.00 | 23.40 |
| 37 | 18.00 | 19.10 | 22.50 | 23.90 |
| 38 | 18.50 | 19.60 | 23.00 | 24.40 |
| 39 | 19.00 | 20.10 | 23.50 | 24.90 |
| 40 | 19.50 | 20.60 | 24.00 | 25.40 |
| 41 | 20.00 | 21.10 | 24.50 | 25.90 |
| 42 | 20.50 | 21.60 | 25.00 | 26.40 |
| 43 | 21.00 | 22.10 | 25.50 | 26.90 |
| 44 | 21.50 | 22.60 | 26.00 | 27.40 |
| 45 | 22.00 | 23.10 | 26.50 | 27.90 |
| 46 | 22.50 | 23.60 | 27.00 | 28.40 |
| 47 | 23.00 | 24.10 | 27.50 | 28.90 |
| 48 | 23.50 | 24.60 | 28.00 | 29.40 |
| 49 | 24.00 | 25.10 | 28.50 | 29.90 |
| 50 | 24.50 | 25.60 | 29.00 | 30.40 |
| 51 | 25.00 | 26.10 | 29.50 | 30.90 |
| 52 | 25.50 | 26.60 | 30.00 | 31.40 |
| 53 | 26.00 | 27.10 | 30.50 | 31.90 |
| 54 | 26.50 | 27.60 | 31.00 | 32.40 |
| 55 | 27.00 | 28.10 | 31.50 | 32.90 |
| 56 | 27.50 | 28.60 | 32.00 | 33.40 |
| 57 | 28.00 | 29.10 | 32.50 | 33.90 |
| 58 | 28.50 | 29.60 | 33.00 | 34.40 |
| 59 | 29.00 | 30.10 | 33.50 | 34.90 |
| 60 | 29.50 | 30.60 | 34.00 | 35.40 |

mstconn

SHEN ZHEN DE RUI ELECTRONIC CO., LTD

0.5mm FPC 掀盖式(D型)下接

050K12-CUB0000000

| | |
|-------|-----|
| SCALE | 1/1 |
| SHEET | 1/1 |
| REV. | A |

| | |
|--------|----|
| UNITS | mm |
| MAT'L | |
| FINISH | |
| Q'TY | |

| | |
|-------------------------|---------------------|
| NAME (INTENDED USE) | 0.5mm FPC 掀盖式(D型)下接 |
| PART NO. (INTENDED USE) | 0.5K-DX-n-PWB |
| APDR: | |
| CHKD: | |
| DR: | YLZ 2011.09.28 |

| | |
|----------|---------------------|
| TITLE: | 0.5mm FPC 掀盖式(D型)下接 |
| DWG NO.: | 050K12-CUB0000000 |

| | |
|-------------|--------------|
| X ± 0.3 | X° ± 5° |
| .X ± 0.25 | .X° ± 2° |
| .XX ± 0.20 | .XX° ± 1° |
| .XXX ± 0.10 | .XXX° ± 0.5° |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRONIC FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRONIC FACTORY