
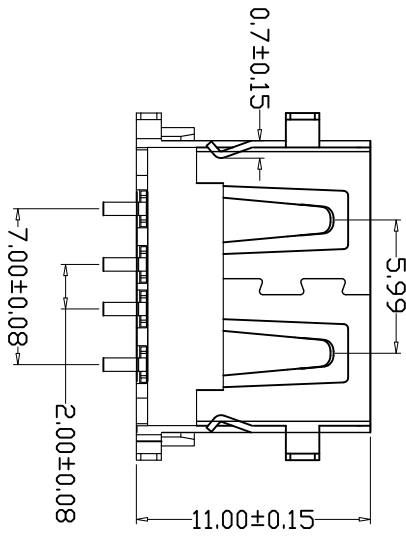

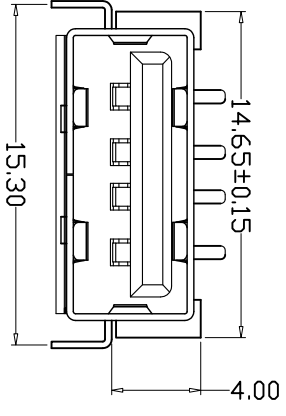


MAPX	MODIFICATION	DATE
------	--------------	------

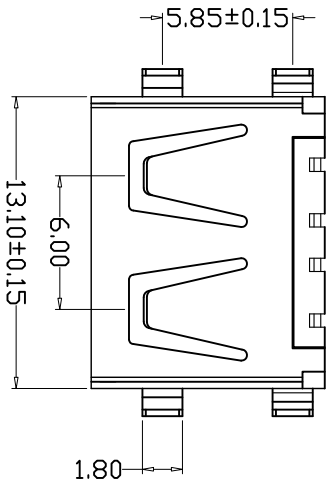

- NOTES:
- HOUSING: SEE NOTES.
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.
 - SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
 - MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE: 3~35N
 - ENVIRONMENTAL:
OPERATING TEMPERATURE: -55°C+85°C
 - Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

深圳市精拓金电子有限公司

产品图
PRODUCT CHART DWG

公差一览表		公差一览表	
TOLERANCE	UNLESS OTHERWISE	TOLERANCE	UNLESS OTHERWISE
X	±0.15	X	±5°
X	±0.10	X	±2°
XX	±0.05	XX	±1°
XXX	±0.03	XXX	±0.5°

单位	MM	制图	许榕强	制料号	
比例	1:1	审核	郭治富	产品名称	USB A/F 190°DIP/1.0.5mm
日期	2016-09-09	核准	黄国荣	角法	
DATE		APRD		VER	版本
					AD

