
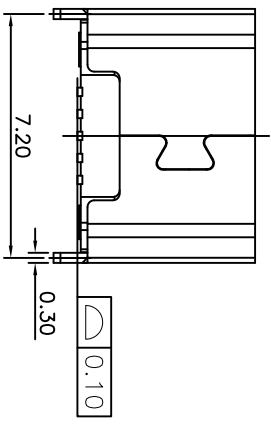
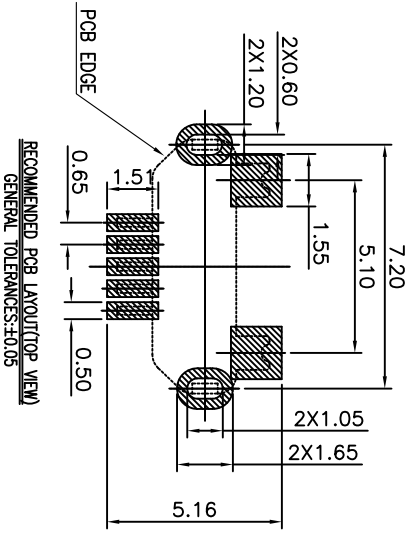


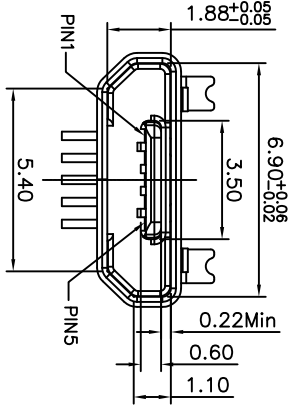
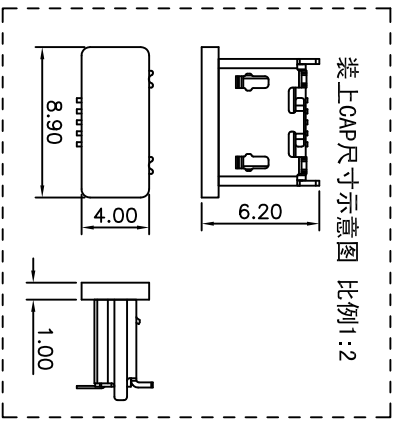


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
------------	----------------------	------------

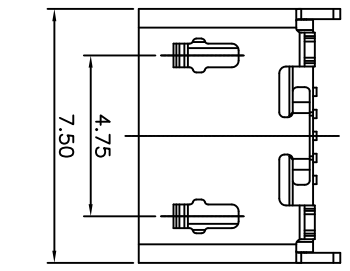

- SPECIFICATION:
- CURRENT RATING: 0.5A(2,3,4CONTACT)/1.8A(1,5CONTACT) MAX.
  - VOLTAGE: 30 VAC
  - TEMPERATURE RANGE: -30 °C ~ 85 °C
  - CONTACT RESISTANCE: 30 MILLIONHM MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
  - INSULATION RESISTANCE: 100 MEGOHMS MIN

产品图  
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	付佳	产品料号 PRODUCT PART NO.
X	±0.25	X'	审核 CHECK		MICRO USB 5P 直立式SMT无翻边
X	±0.20	X'	核准 APPROV	郭治富	角法 VIEW
.XX	±0.15	.XX'	日期 DATE	2009/10/20	版本 VERS
.XXX	±0.10	.XXX'			A0