

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
------------	----------------------	------------

規格說明: Specifications:

电气特性: Electrical:








1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.0kgf (MAX)
Unmate force: 0.7kgf (MIN)
2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Inermaplastics,
Ul 94V-0 LCP Black
 2. 端子: Contact: Copper Alloy C2680
 3. 外壳: Shell: Copper Alloy C2680
- 电镀: Finish:
1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
 2. 外壳: Shell:
Nickel Plating

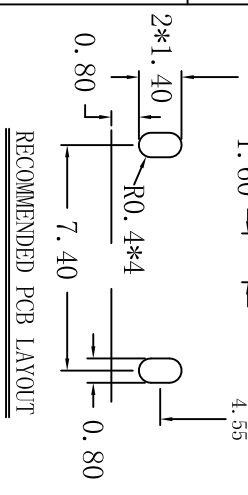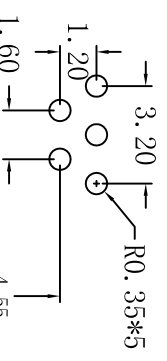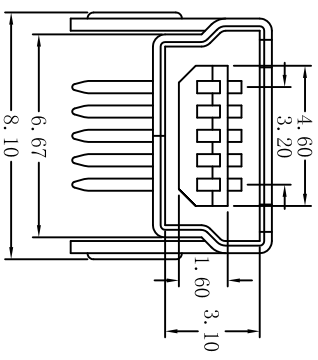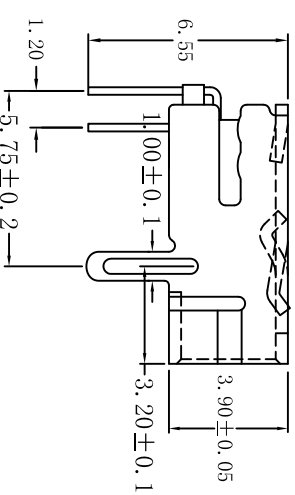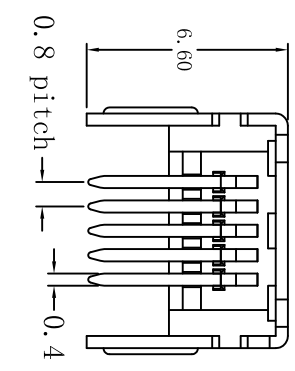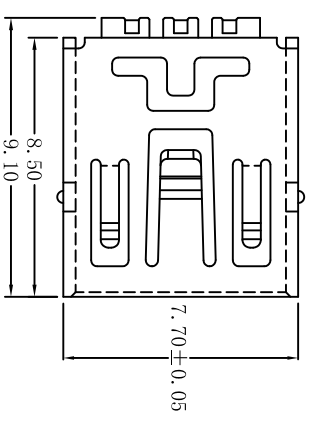

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	邱建辉	产品料号 PRODUCT PART NO.	
X	±0.25	X'	±5'	审核 CHECK	郭洽富	产品名称 PRODUCT NAME	MINI USB 5P/7F 90° B型两脚加长
XX	±0.15	XX'	±1'	核准 APPD	黄国荣	角法 VIB	
.XXX	±0.10	.XXX'	±0.5'	日期 DATE	2014/10/20	版本 REV	A0