


P. C. B LAYOUT

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f, UL94v-0
 - Contact: copper alloy, t=0.20mm
 - Shell: copper alloy, t=0.25mm
 - Specification:
 - Current rating: 1A Max
 - Dielectric withstanding voltage: 100V(AC) for 1 min.
 - Contact resistance: 50mΩ Max.
 - Insulation resistance: 100mΩ min.
 - Total mating force: 3.57 KgF Max.
 - Total unmating force: 1.0 KgF Min. 0.81~2.05 KgF Min.
 - Temperature range: -30° C~80° C after 10,000 insertion/extraction cycles

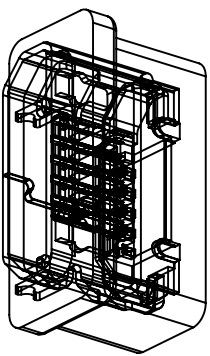

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	公差
X	±0.35
X	±0.30
XX	±0.20
XXX	±0.10

UNIT	单位	MM	DRAWING	制图	PRODUCT PART NO.	制图料号
X	±5.0°		审核	Gavin	MICRO USB-5V/F 90°	
X	±2.0°	1:1	审核	郭治富	5.65两脚防水	
XX	±1.0°		核准	黄国荣		
XXX	±0.5°		核准			
DATE	2015-06-10		APPD			

MAPX

MODIFICATION

DATE