

REV.	MODIFICATION	ECN No.	NAME	DATE
A/1				2009-06-24


产品规格说明: (specifications)
 电器特性: (Electrical characteristics)

- 最大值30毫欧: (30 milliohms MAX)
- 2. 耐电压: (Dielectric Withstanding Voltage:)
500 伏特交流电 (500V AC At Sea Level)
- 3. 绝缘阻抗: (Insulation Resistance:)
最小值1000兆欧姆 (1000 mega-ohms MIN)

材料:Material:

- 1. 塑胶: (Housing) : High Temperature Inertplastics,
U1 94V-0
 - :Black :White :其它
 - :PBT :耐高温塑胶 LCP :其它
 - 2. 端子: (Contact) : 2680 5191
 - 3. 外壳: (Shell) : 2680 PCC-SD PCC-SB
- 电镀: (Finish):
 1. 端子: (Contact): Plated Gold in Mating Area:
 Tin On Solder Tails
 接触点镀金, 脚镀锡.
 2. 外壳: (Shell): Nickel Plating 镀亮镍
 接触点镀金 u'' 3u'' 5u'' 5u'' 0u'' 脚镀锡.

注明: 1. 标示编号为*重点检测尺寸, 图纸部分仅供参考, 因技术改良, 客户不同需求, 部分细节会与实物有区别, 请以实物为准。

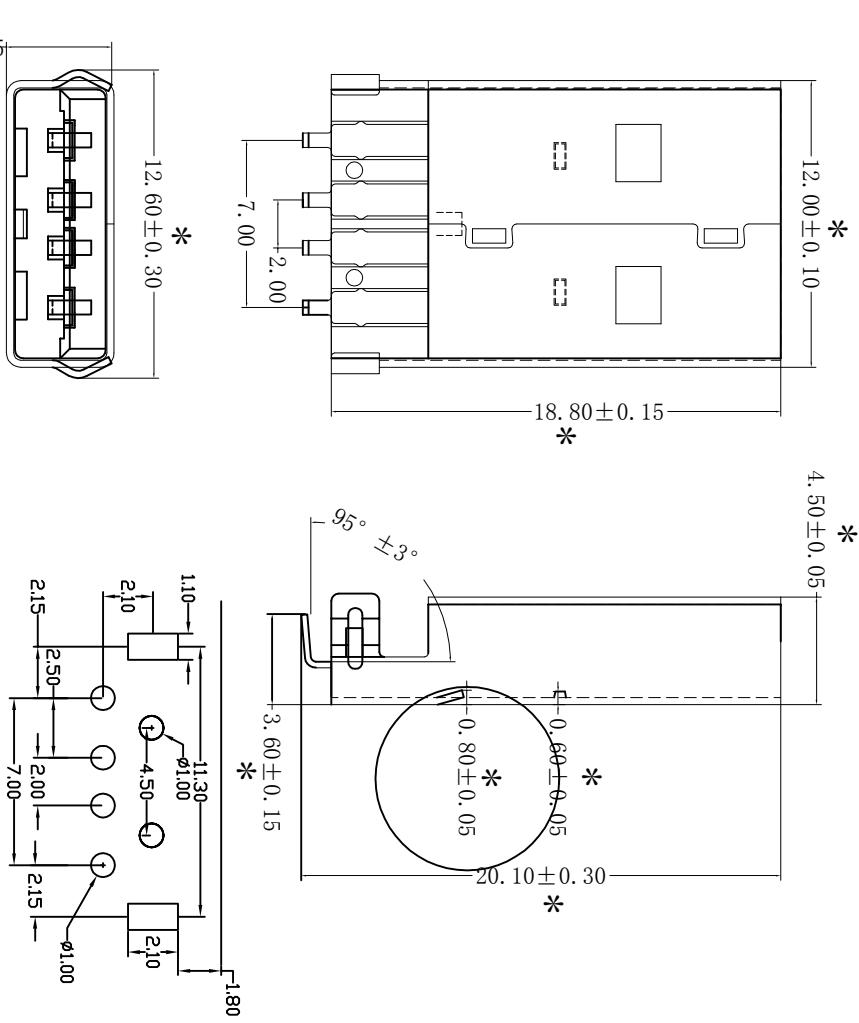

深圳市精拓金电子有限公司

产品名称: A公沉板弯角90度
 (有定位柱)

核准
 Approved by

REV.: A/0 SCALE: FIT
 UNT: mm SHEET: 1 OF 1
 GENERAL TOLERANCES

产品名	料号	核准	制图	范崇志	THIRD ANGLE
PRODUCT NAME	Part No.	Checked by	Drawn by		
材质	Material				
表面	Surface				