
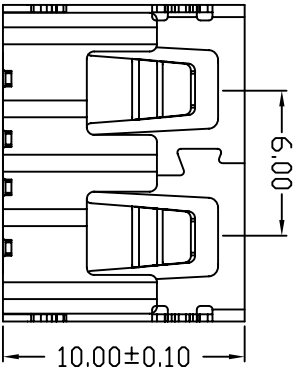
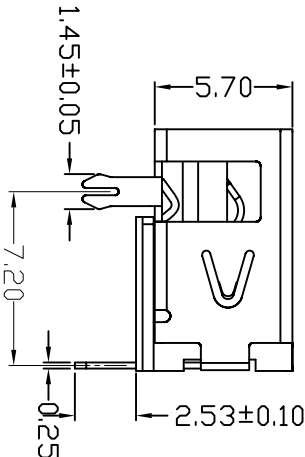
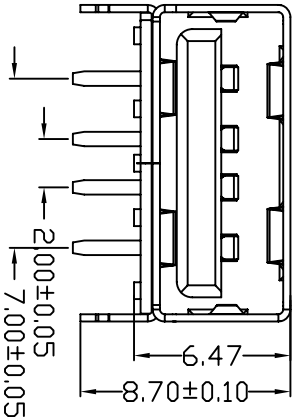


D款，反向10.0前两脚，DIP-*6.50



MAPX	MODIFICATION	DATE

NOTES:

1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN

2.MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)/MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN


5000 CYCLES EXTRACTION FORCE:3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:

- 01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

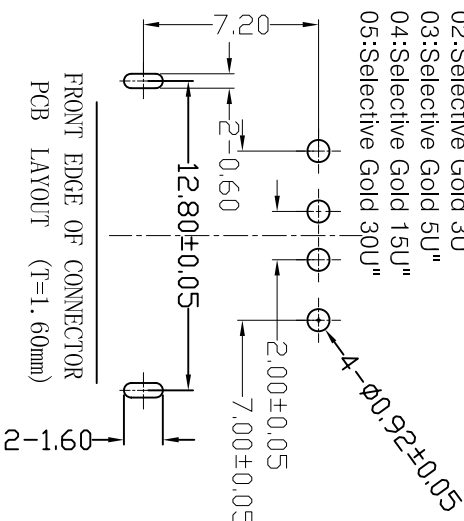

产品图
PRODUCT CHART DWG

公差一览表

TOLERANCE	UNLESS OTHERWISE
X	±0.15
X	±0.10
XX	±0.05
XXX	±0.03

深圳市精拓金电子有限公司

单位	MM	制图	Z-Y-B	制图料号	JTY-USB-10.0-002
UNITS		DRAWING		PRODUCT PART NO.	
比例	1:1	审核		产品名称	USB A/F 10.0无边前两脚鱼叉(万弹)
SCALE		CHKD		PRODUCT NO.	
日期	2012.09.24	核准		角法	VER
DATE		APRD		VER	AD