



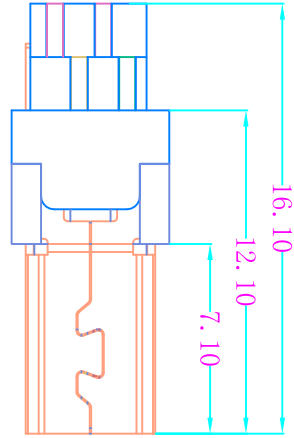
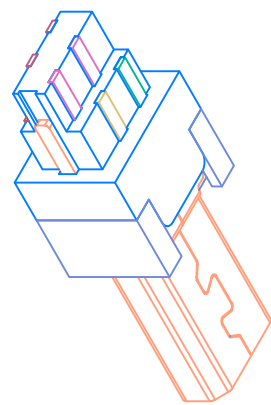


MAPX	MODIFICATION	DATE
------	--------------	------



2.05±0.04



4.85±0.04

- 备注:
1. 材质
  - 1.1 胶芯: PBT UL94V-0
  - 1.2 端子: C2680, 镍底50U", 锡100U", 半金0.5U"
  - 1.3 外壳: 铜料或铁料, 表面镀镍100U"以上
  2. 主要特性
  - 2.1 额定电流: 0.5A
  - 2.2 接触阻抗: 30m MAX
  - 2.3 绝缘阻抗: 100m MIN 250V DC
  - 2.4 耐压测试: 250V/AC
  - 2.5 沾锡性: 温度235±5°C, 时间5±0.5s
  - 2.6 退PIN力: 0.50kgf MIN
  - 2.7 整体插入力: 3.0kgf MAX 整体拔出力: 0.5-1.5kgf
  - 2.8 使用寿命: 5000次
  - 2.9 工作温度: -30°C~+80°C

# 深圳市精拓金电子有限公司

<b>产品图</b> PRODUCT CHART DWG 公差一览表 TOLERANCE UNLESS OTHERWISE		单位: MM UNITS: MM 比例: 1:1 SCALE: 1:1 日期: 2016-09-09 DATE: 2016-09-09		制图: 许榕强 DRAWING: 许榕强 审核: 郭治富 CHKD: 郭治富 核准: 黄国荣 APPD: 黄国荣		制图料号 PRODUCT PART NO. 产品名称 PRODUCT NO. MINI USB 8PM 版本 VER: A0	
X	±0.15	X	±5°				
X	±0.10	X	±2°				
XX	±0.05	XX	±1°				
XXX	±0.03	XXX	±0.5°				