


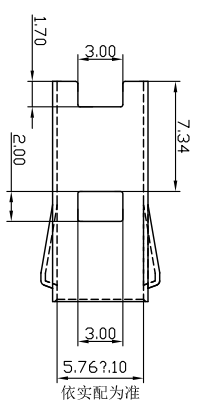
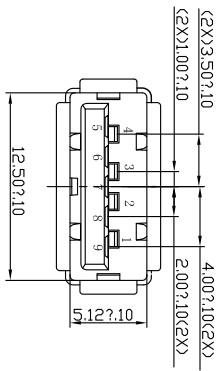




目錄 MAPX	變更內容 MODIFICATION	日期 DATE
------------	----------------------	------------



料号备注:
CU3F009SXXTXR

- "12"半金雾锡5U/F
- "13"半金雾锡3U"
- "14"半金雾锡5U"
- "15"半金雾锡15U"
- "16"半金雾锡30U"

operating Temperature:-55~+85~
Shell: Nickel Plated
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
PLATING: Brass
Mating Force:35 Newtons;Maximum
Unmating Force:10 Newtons;Minimum,
8N Min After Durability
Housing: PBT+30%GF 94V-0 COLOR:BLUE
Contact: copper alloy(T=0.25mm)
Shell: Brass

SPECIFICATIONS:
Contact current Rating:
1.8 Amperes for pin1&pin4,
0.25 Amperes other contacts
Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.
Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts
Mechanical Characteristics:
Mating Force:35 Newtons;Maximum
Unmating Force:10 Newtons;Minimum,
8N Min After Durability

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO	USB 3.0 AP 180~塑线A款带耳套
X	±0.25	X'	±5'	比例 SCALE	1:1	产品名称 PRODUCT NAME	USB 3.0 AP 180~塑线A款带耳套
XX	±0.20	X''	±2'	日期 DATE	2014/2/2	图法 VIEW	⊕ ⊖
.XXX	±0.15	XX'	±1'	核准 APPRO		版本 VER	A0
	±0.10	.XXX'	±0.5'				