

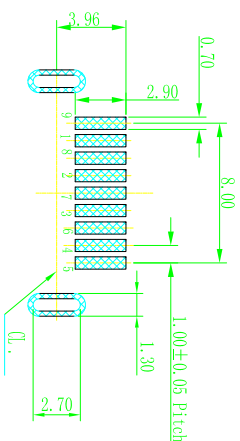





ROHS

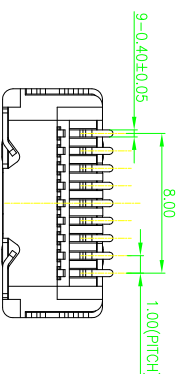

P.C.B LAYOUT T=1.20mm TH:±0.05



Specifications:

- 1.Current Rating:1.0A at 30V A.C.
- 2.Withstanding Voltage:100V AC for one minute.
- 3.Insulation Resistance:100MΩ Min.
- 4.Contact Resistance:30mΩ Max.
- 5.Mating Force:3.57kgf Max.
- 6.Unmating Force:1.02kgf Min.
- 7.Operating Temperature:-25℃~+85℃.

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
4	5P端子	GS191	—	QUANTITY RATED
3	4P端子	GS191	—	QUANTITY RATED
2	主体	LCP	BLUE	UL 94V-0
1	外壳	CS80	—	NEED GOLD PLATED

深圳市精拓金电子有限公司  
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	制图料号 PRODUCT PART NO.
X	+0.25	X	审核 CHKD	许榕强
X	+0.20	X	核准 APPD	郭治富
XX	±0.15	XX	日期 DATE	2010-08-09
XXX	+0.10	XXX	日期 DATE	2010-08-09

产品图 PRODUCT CHART DWG		单位 UNITS	制图 DRAWING	制图料号 PRODUCT PART NO.
X	+0.25	X	审核 CHKD	许榕强
X	+0.20	X	核准 APPD	郭治富
XX	±0.15	XX	日期 DATE	2010-08-09
XXX	+0.10	XXX	日期 DATE	2010-08-09

MAPX	MODIFICATION	DRW	DATE

单位 UNITS	制图 DRAWING	制图料号 PRODUCT PART NO.
MM	审核 CHKD	许榕强
1:1	核准 APPD	郭治富
比例 SCALE	日期 DATE	2010-08-09
±2.°	日期 DATE	2010-08-09
±1.°	日期 DATE	2010-08-09
±0.5°	日期 DATE	2010-08-09

比例 SCALE	日期 DATE	核准 APPD
1:1	2010-08-09	郭治富
±2.°	2010-08-09	郭治富
±1.°	2010-08-09	郭治富
±0.5°	2010-08-09	郭治富

产品名称 PRODUCT NO.	角法 VIEW	版本 VER
USB3.0 4P 立式SMT(无卷边)	角法 VIEW	版本 VER
		A0