
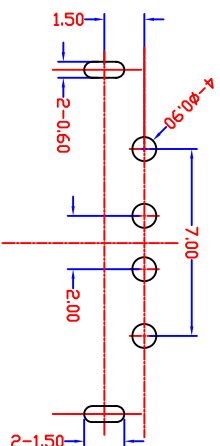
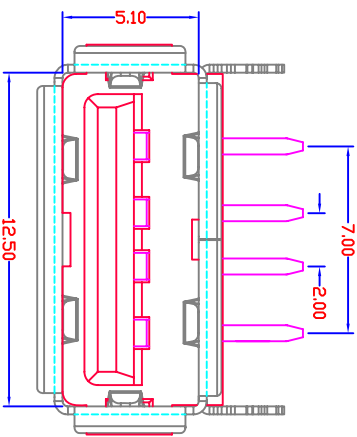
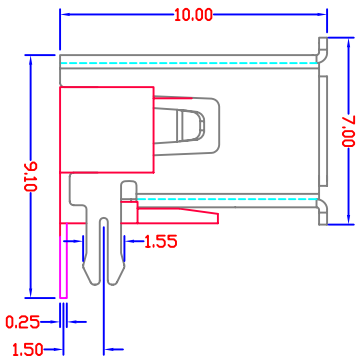


MAPX	MODIFICATION	DATE
------	--------------	------

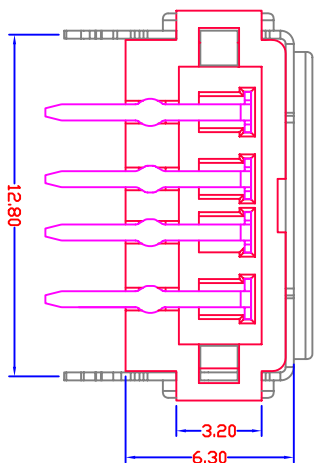

RECOMMENDED P.C.B LAYOUT

- Specification:**
- Electrical Characteristics:**
 Dielectric Withstanding Voltage: AC 500V/1MINUTE.
 Insulation Resistance: 1000 MΩ/Min.
 Contact Resistance: 30 mΩ/ Max.
 - Mechanical Characteristics:**
 INSERTION FORCE: 30N(3.06kgf) MAX
 EXTRACTION FORCE: 10~30N(1.02~3.06kgf)
 Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06kgf)
 - Material:**
 Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25
 Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
 Shell: Bronze, C2680R-H =0.30mm
 Plating: Nickel underplate 2.54 um Min;
 Housing: LCP Black
 - Environmental:**
 Operating Temperature: 0°C to +85°C.

深圳市精拓金电子有限公司

产品图
PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差
X ±0.15 X ±5°	
X ±0.10 X ±2°	
XX ±0.05 XX ±1°	
XXX ±0.03 .XXX ±0.5°	

单位	MM	制图	Z-Y-B	制图料号	JTJ-USB-AV/F-10.0-014
比例	1:1	审核		产品名称	USB AV/F 90° 短体后两脚脚有边
日期	2012.04.1	核准		PRODUCT NO	
DATE		APRD		角法	版本
				VER	AD