


PCB HOLES(THE PATTERN SIDE)
NOTE: GENERAL TOLERANCE: ±0.1mm

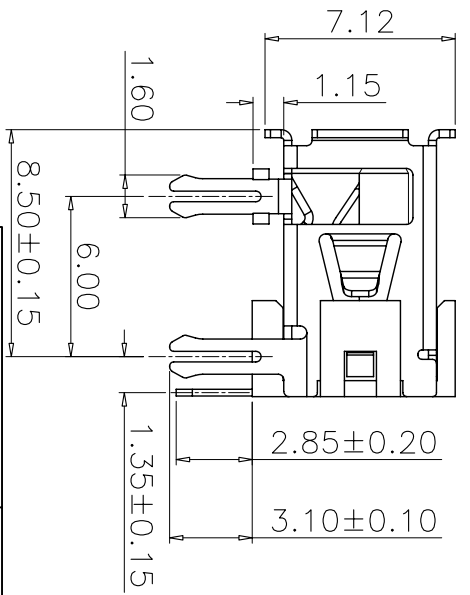

- NOTES:
- HOUSING: SEE NOTES, TERMINAL: SEE NOTES, SHELL: SEE NOTES.
 - MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N 5000 CYCLES MIN
 - 5000 CYCLES EXTRACTION FORCE: 3~35N
 - ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55°C+85°C
 - Contact finish:
 - 01: Selective Gold Flash
 - 02: Selective Gold 3U"
 - 03: Selective Gold 5U"
 - 04: Selective Gold 15U"
 - 05: Selective Gold 30U"

MAPX	MODIFICATION	DATE

深圳市精拓金电子有限公司

公差一览表	
TOLERANCE UNLESS OTHERWISE SPECIFIED	公差一览表
X ±0.15	X ±5.°
.X ±0.10	.X ±2.°
.XX ±0.05	.XX ±1.°
.XXX ±0.03	.XXX ±0.5°

产品图		单位		制图		制图料号	
PRODUCT CHART DWG	公差一览表	UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO.	USB A/F 10.0-B-002
		SCALE	1:1	审核		产品名称	USB A/F 10.0 (四脚有边)
		DATE	2010.05.06	核准		PRODUCT NO.	
				APPD		角法	
						版本	
						YEAR	
							A0

1 2 3 4 7 8 9 10

Autodesk 教育版产品制作