

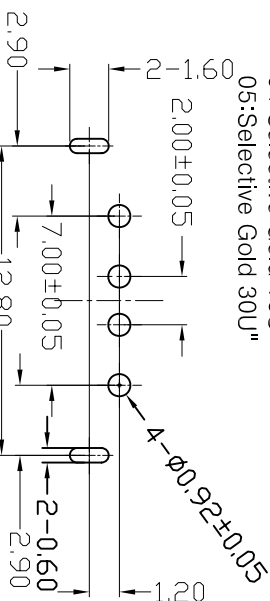
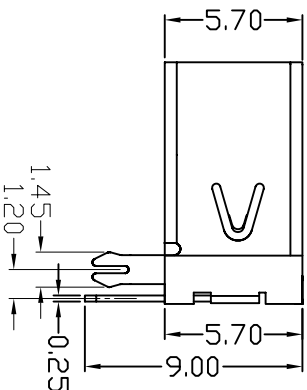
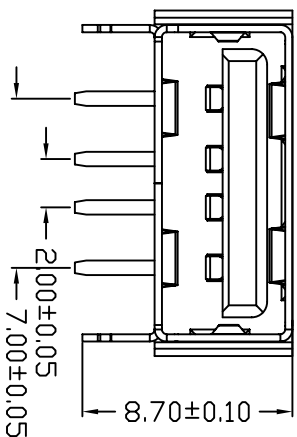


D款，正向10.0后两脚，DIP-\*5.70

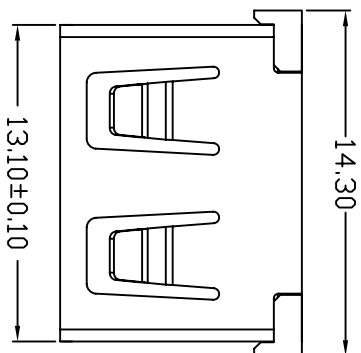

FRONT EDGE OF CONNECTOR  
PCB LAYOUT (T=1.60mm)

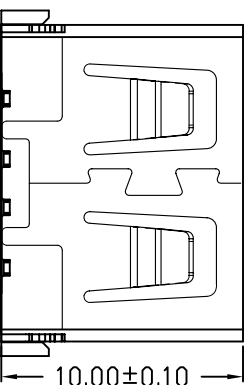

MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:  
1. HOUSING: SEE NOTES, UL94V-0 .  
TERMINAL: SEE NOTES.  
SHELL: SEE NOTES.

SPECIFICATION:  
1. ELECTRICAL CHARACTERISTIC:  
CONTACT RESISTANCE: 30MΩ MAX  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN  
INSULATION RESISTANCE: 1000MΩ MIN  
2. MECHANICAL CHARACTERISTIC:  
INSERTION FORCE: 35N(3.57KGF) MAX  
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)/MIN  
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N  
5000 CYCLES MIN

3. ENVIRONMENTAL:  
OPERATING TEMPERATURE: -55°C+85°C

4. Contact finish:  
01: Selective Gold Flash  
02: Selective Gold 3U"  
03: Selective Gold 5U"  
04: Selective Gold 15U"  
05: Selective Gold 30U"

产品图  
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表		制图		制图料号	
TOLERANCE UNLESS OTHERWISE	UNITS	DRAWING	Z-Y-B	PRODUCT PART NO	JTY-1USB-10.0-002
X ±0.25	X	审核	1:1	产品名称	USB A/F 10.0无边后两脚鱼叉(万弹)
X ±0.20	X	日期	2012.09.24	PRODUCT NO	
XX ±0.15	XX	核准		角法	
XXX ±0.10	XXX	APRD		版本	AD
				VER	