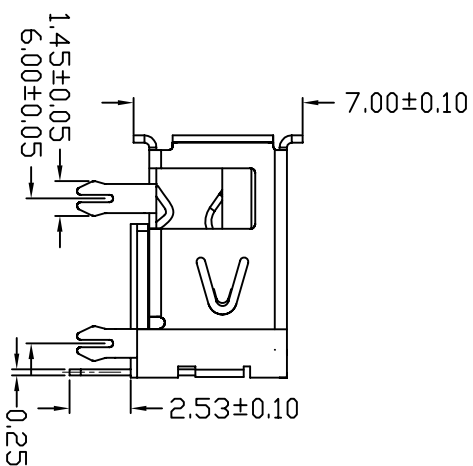
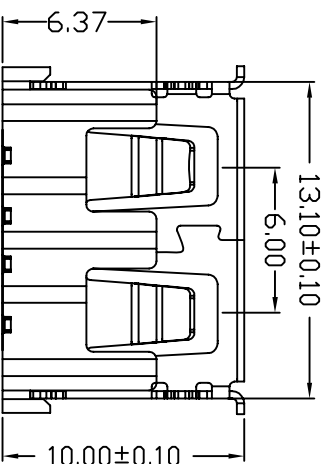
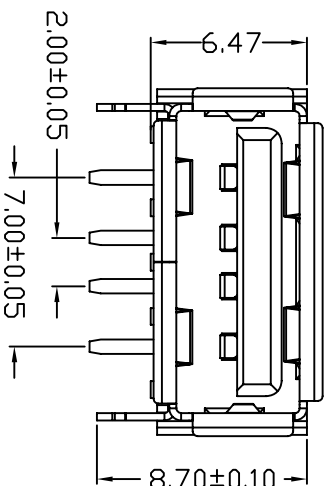


1. HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

1. ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30M Ω MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN

INSULATION RESISTANCE: 1000MΩ MIN

2. MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX

EXTRACTION FORCE: $10 \sim 35 \text{ N} (1.02 \sim 3.57 \text{ kgf})$ MIN

DURABILITY: 1500 CYCLES EXTRACTION FORCE: $10 \sim 35\text{N}$

5000 CYCLES MIN

5000 CYCLES EXTRACTION FORCE: 3~35N

3. ENVIRONMENTAL:

OPERATING TEMPERATURE: -55°C to $+85^{\circ}\text{C}$

4. Contact finish:

- 01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

深圳市精拓电子有限公司

产品图										深圳市精拓金电子有限公司									
PRODUCT CHART DWG																			
公差一览表																			
TOLERANCE UNLESS OTHERWISE										单位									
X. ±0.15 X. ±5.°										UNITS MM									
.X. ±0.10 X. ±2.°										比例 SCALE 1:1									
.XX ±0.05 .XX ±1.°										制图 DRAWING									
.XXX ±0.03 .XXX ±0.5°										审核 CHECK									
DATE 2012.09.24										核准 APPD									
角法 VIEW										制图料号									
APPD										PRODUCT PART NO. PRODUCT NO.									
										J11-J15B-10.6-001									
版本 VER										USB A/F 10.6有边四脚鱼叉（方弹									
A0																			

MAPX	MODIFICATION	DATE