


MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:
 1. HOUSING: SEE NOTES, UL94V-0 .
 TERMINAL: SEE NOTES.
 SHELL: SEE NOTES.

SPECIFICATION:
 1. ELECTRICAL CHARACTERISTIC:
 CONTACT RESISTANCE: 30MΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 INSULATION RESISTANCE: 1000MΩ MIN
 2. MECHANICAL CHARACTERISTIC:
 INSERTION FORCE: 35N(3.57KGF) MAX
 EXTRACTION FORCE: 10~35N(1.02~3.57KGF)/MIN
 DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
 5000 CYCLES MIN

3. ENVIRONMENTAL:
 OPERATING TEMPERATURE: -55°C+85°C
 4. Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U"
- 03: Selective Gold 5U"
- 04: Selective Gold 15U"
- 05: Selective Gold 30U"

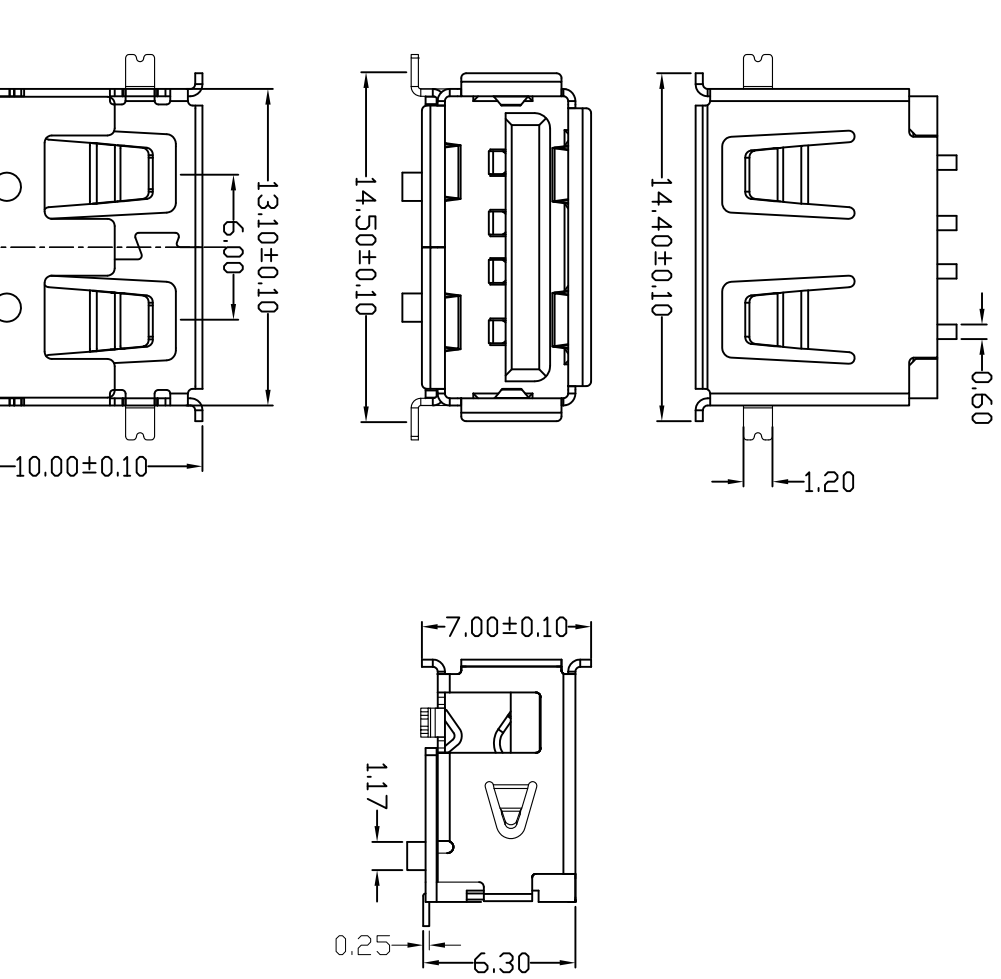

产品图

公差一览表		公差一览表	
TOLERANCE UNLESS OTHERWISE	公差	TOLERANCE UNLESS OTHERWISE	公差
X ±0.25	X	X ±5°	X
X ±0.20	X	X ±2°	X
XX ±0.15	XX	XX ±1°	XX
XXX ±0.10	XXX	XXX ±0.5°	XXX

单位	MM	制图	Z-Y-B	制图料号	JTY-1(USB-10.0)/SMT-003
比例	1:1	审核		产品名称	USB A/F 10.0有边四脚鱼叉SMT (方雅)
日期	2013/08/24	核准		产品NO	
DATE		APRD		角法	版本
				VIEW	VER
					AD

FRONT EDGE OF CONNECTOR
PCB LAYOUT

深圳市精拓金电子有限公司