


MAPX	MODIFICATION	DATE
------	--------------	------

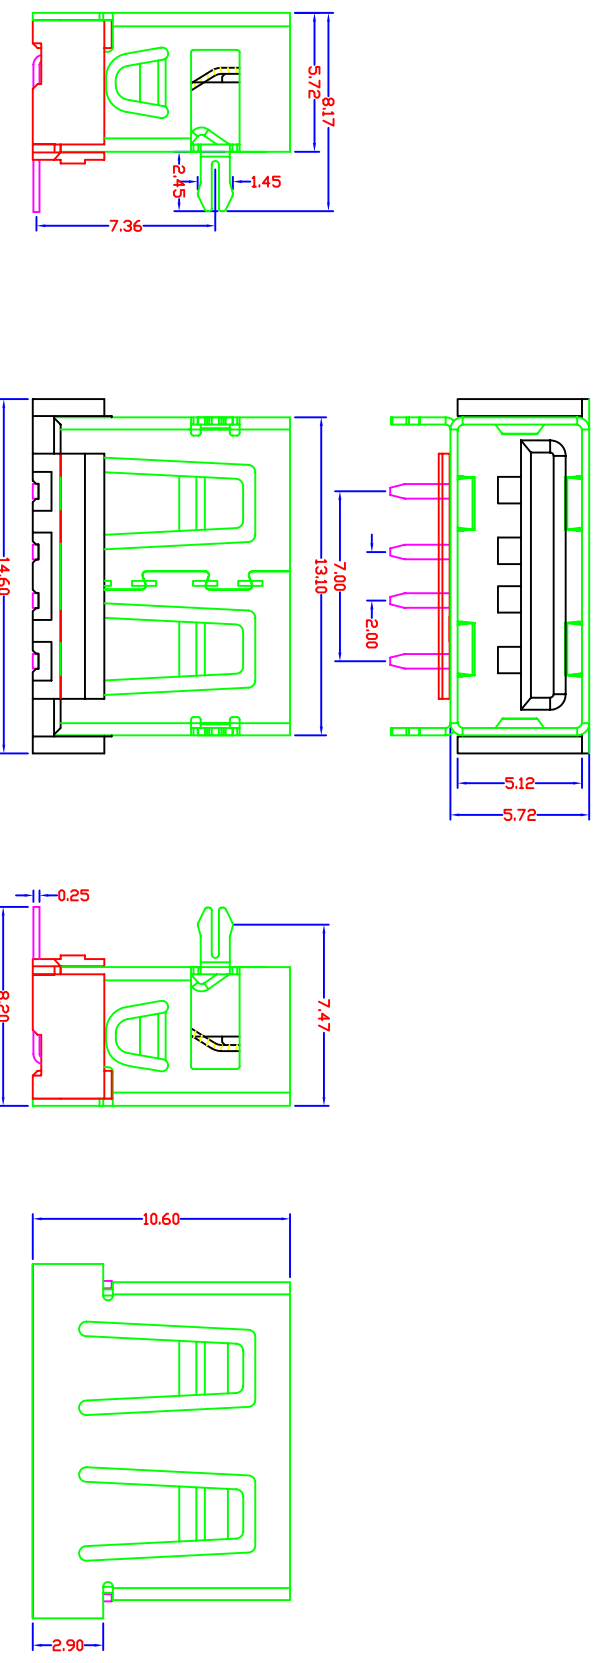


Specification:

1. Electrical Characteristics:
 Dielectric Withstanding Voltage: AC 500V/1MINUTE.
 Insulation Resistance: 1000 MΩ/Min.
 Contact Resistance: 30 mΩ Max.
2. Mechanical Characteristics:
 INSERTION FORCE: 30N(3.06KgF) MAX
 EXTRACTION FORCE: 10~30N(1.02~3.06KgF)
 Durability: 1500cycles, EXTRACTION FORCE: 10~30N(1.02~3.06KgF)

3. Material:
 Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25
 Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
 Shell: Bronze, C2680R-H=0.30mm
 Plating: Nickel underplate 2.54 um Min;
 Housing: LCP Black

4. Environmental:
 Operating Temperature: 0°C to +85°C.

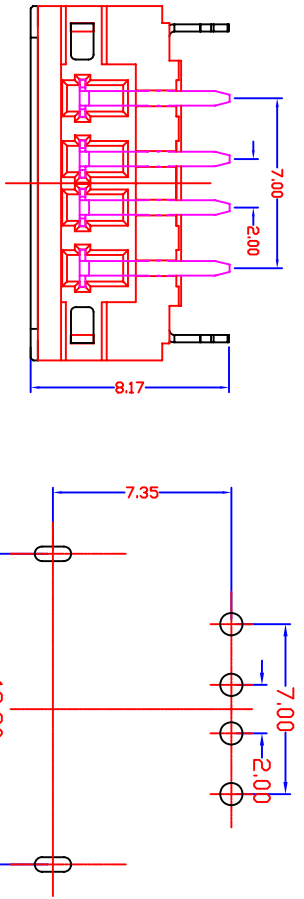

Specification:

1. Electrical Characteristics:
 Dielectric Withstanding Voltage: AC 500V/1MINUTE.
 Insulation Resistance: 1000 MΩ/Min.
 Contact Resistance: 30 mΩ Max.
2. Mechanical Characteristics:
 INSERTION FORCE: 30N(3.06KgF) MAX
 EXTRACTION FORCE: 10~30N(1.02~3.06KgF)
 Durability: 1500cycles, EXTRACTION FORCE: 10~30N(1.02~3.06KgF)

3. Material:
 Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25
 Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
 Shell: Bronze, C2680R-H=0.30mm
 Plating: Nickel underplate 2.54 um Min;
 Housing: LCP Black

4. Environmental:
 Operating Temperature: 0°C to +85°C.

产品图
 PRODUCT CHART DWG
 公差一覽表
 TOLERANCE UNLESS OTHERWISE SPECIFIED
 單位: MM
 UNITS: MM
 比例: 1:1
 SCALE: 1:1
 日期: 2011.09.02
 DATE: 2011.09.02
 制圖: 審核: 批准: 制圖料號: 產品名稱: 角法: 版本: 日期: 2011.09.02
 DRAWING: 審核: 批准: PRODUCT PART NO: PRODUCT NO: 角法: 版本: VER: 日期: 2011.09.02

深圳市精拓金电子有限公司
 SHENZHEN JINGTUO GOLD ELECTRONICS CO., LTD.

公差一覽表	單位	MM	制圖	Z-Y-B	制圖料號	PRODUCT PART NO	角法	版本	日期
TOLERANCE UNLESS OTHERWISE SPECIFIED	UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO	PRODUCT NO	角法	版本	日期
±0.15 X	±5°		審核		USB A/F 90° 兩腳 短體		90°	AD	
±0.10 X	±2°		制圖						
±0.05 XX	±1°		日期						
±0.03 XXX	±0.5°		DATE						