
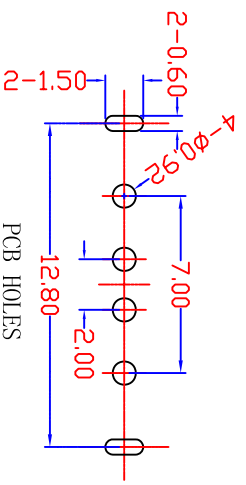
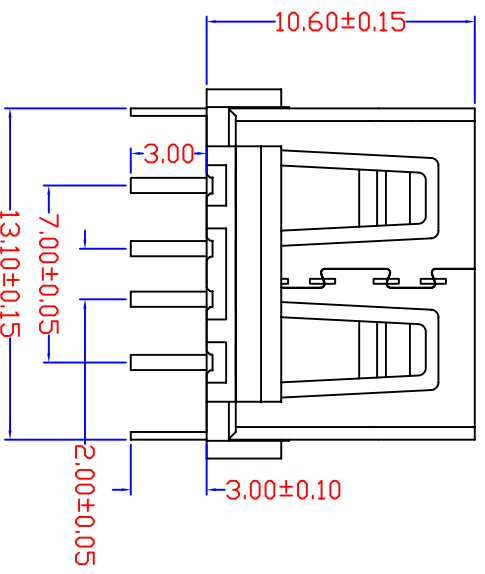
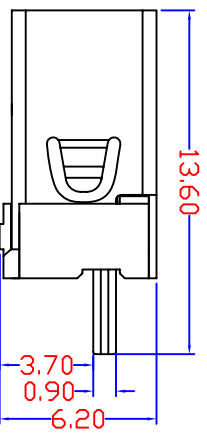
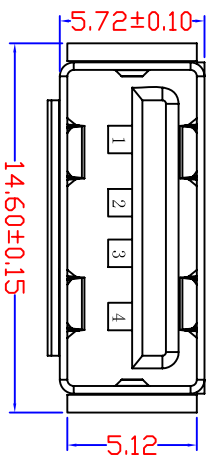


MAPX	MODIFICATION	DATE
------	--------------	------

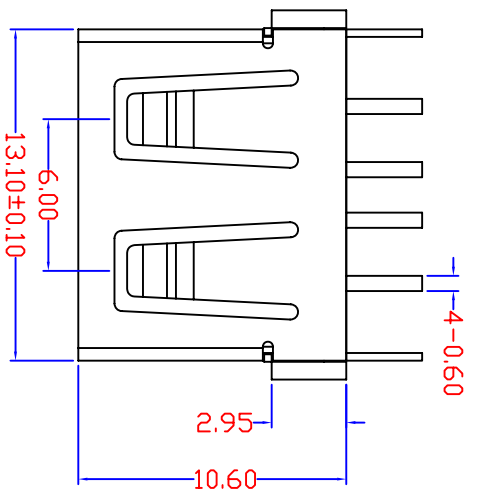

- Specification:**
- 1. Electrical Characteristics:**  
 Dielectric Withstanding Voltage: AC 500V/1MINUTE.  
 Insulation Resistance: 1000 MΩ/Min.  
 Contact Resistance: 30 mΩ Max.
- 2. Mechanical Characteristics:**  
 INSERTION FORCE: 30N(3.06kgf) MAX  
 EXTRACTION FORCE: 10-30N(1.02-3.06kgf)  
 Durability: 1500cycles, EXTRACTION FORCE: 10-30N(1.02-3.06kgf)
- 3. Material:**  
 Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25  
 Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;  
 Shell: Bronze, C2680R-H =0.30mm  
 Plating: Nickel underplate 2.54 um Min;  
 Housing: LCP Black
- 4. Environmental:**  
 Operating Temperature: 0°C to +85°C.

产品图  
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表		单位		制图		制图料号	
TOLERANCE UNLESS OTHERWISE	UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO.		
X. ±0.25	X.	±5°	比例	1:1	产品名称	USB 短体180插板外壳	
X. ±0.20	X.	±2°	日期	2011.09.01	审核		
XX ±0.15	XX	±1°	DATE	2011.09.01	核准		
XXX ±0.10	XXX	±0.5°	DATE	2011.09.01	APPRO		

