
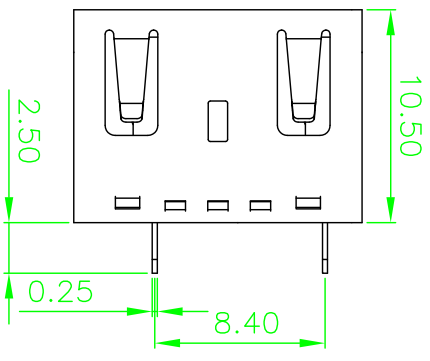
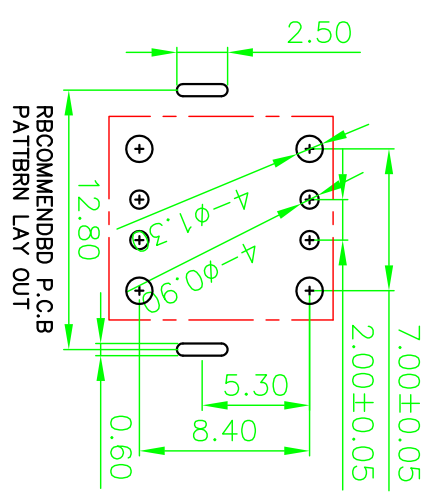
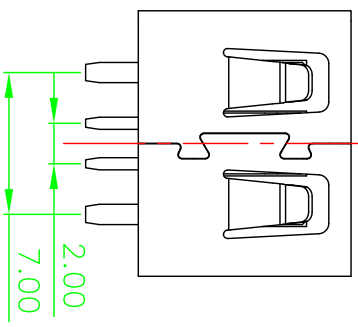
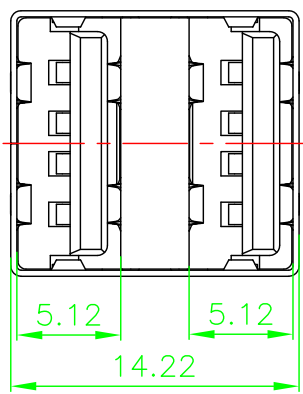


RoHS

Parts Drawing

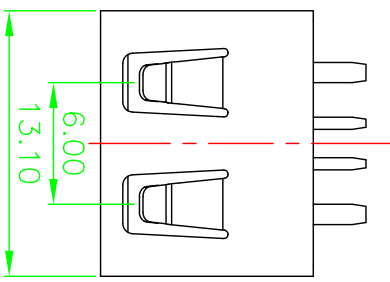

1	907-322A1021Y102	5
2		6
3		7
4		8

Note:

1.Material:

1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0

1.2,Contact: copper alloy,t=0.25mm

1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:

2.1,Current rating:3.0A Max.

2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3,Contact resistance: 30 mΩ Max.

2.4,Insulation resistance: 100 MΩ Min.

2.5,Total mating force: 3.57 Kgf Max.

2.6,Total unmating force: 1.0 Kgf Min.

3.Finish:

3.1,Contact: Plated Golt in Mating Area: Tin On Solder Talls


Shell: Nickel Plating

4.Environmental:

4.1,Temperature range: -55°C~85°C

PART ON:

907-222AXXX1Y1XX

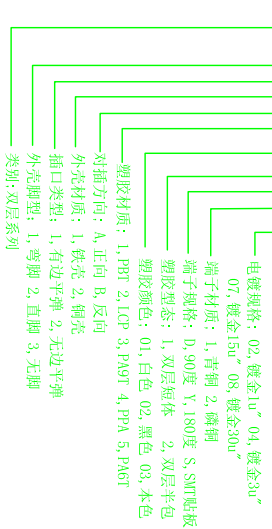

深圳市精拓金电子有限公司

DRAWN		PART NO.	SEE PART ON
CHECKED		DRAWING NO.	R907322A1021Y102
APPROVED		SCALE	1:1
		SHEET	1 OF 1
		SIZE	A4
		REV.	X1

TITLE	USB AF 10.5短体双层无脚
TOLERANCE	.XXX±.10, .XX±.25, .X±.38, ANG±5°
UNIT	mm
3rd ANGLE PROJECTION	

REVISIONS			
SYM	ECN No.	MODIFICATION	DATE

1

5

4

3

2

1

A

B

C

D

E

5

4

3

2

1

1