


MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:  
 1. HOUSING: SEE NOTES, UL94V-0 .  
 TERMINAL: SEE NOTES.  
 SHELL: SEE NOTES.

SPECIFICATION:  
 1. ELECTRICAL CHARACTERISTIC:  
 CONTACT RESISTANCE: 30MΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN  
 INSULATION RESISTANCE: 1000MΩ MIN  
 2. MECHANICAL CHARACTERISTIC:  
 INSERTION FORCE: 35N(3.57KGF) MAX  
 EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN

3. Contact finish:  
 01: Selective Gold Flash  
 02: Selective Gold 3U"  
 03: Selective Gold 5U"  
 04: Selective Gold 15U"  
 05: Selective Gold 30U"

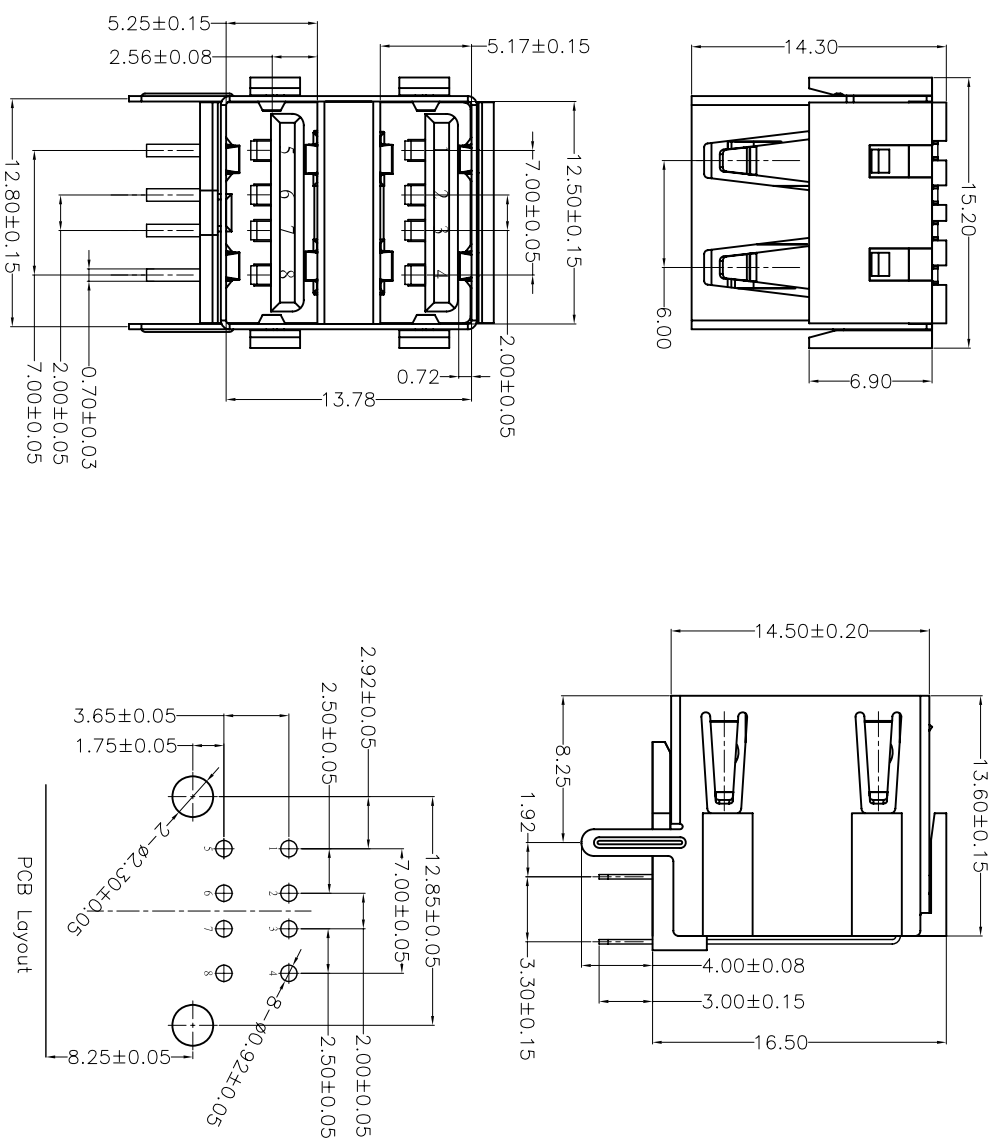

# 深圳市精拓金电子有限公司

产品图		制图料号		JTJ-USB/双层-002	
公差一览表		制图		Z-Y-B	
PRODUCT CHART DWG		DRAWING			
TOLERANCE UNLESS OTHERWISE		UNITS		MM	
X ±0.25 X ±5.°		DRAKING		审核	
X ±0.20 X ±2.°		SCALE		1:1	
XX ±0.15 XX ±1.°		DATE		2014.05.06	
XXX ±0.10 XXX ±0.5°		核准备		APPD	

G 1 2 3 4 5 6 7 8 9 10 G

F

E

D

C

B

A