


MAPX	MODIFICATION	DATE
------	--------------	------

NOTE:
 1. Material:
 Housing: Thermoplastics (U94V-0(ROHS-HP))
 Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
 Shell: COPPER ALLOY T=0.30mm
 2. FINISH:
 Contact: 15u" Gold Plated on Contact Area,
 80u" Min. Tin Plated on Solder Area
 50u" Min. Nickel Underplating Over All.
 Shell: 50u" Min. Nickel Underplating Over All.
 3. Specification:
 3.1: Rating:
 3.2: Rated voltage 500V AC/DC. Rated current: 2 A Max.
 3.2: Electrical:
 Insulation Resistance(EIA-364-21):
 1000MΩ Min. at 500V/DC for 1Minute.
 Contact Resistance(EIA-364-22):
 30 mΩ Max. at 20mV Max, 50mA
 Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, Flashover or breakdown at 500V/AC 1Minute
 4. Plug extraction force shall be between 1.0kgf and 2.00kgf
 5. Contact finish:
 01: Selective Gold Flash
 02: Selective Gold 3U"
 03: Selective Gold 5U"
 04: Selective Gold 15U"
 05: Selective Gold 30U"

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCES: ±0.05

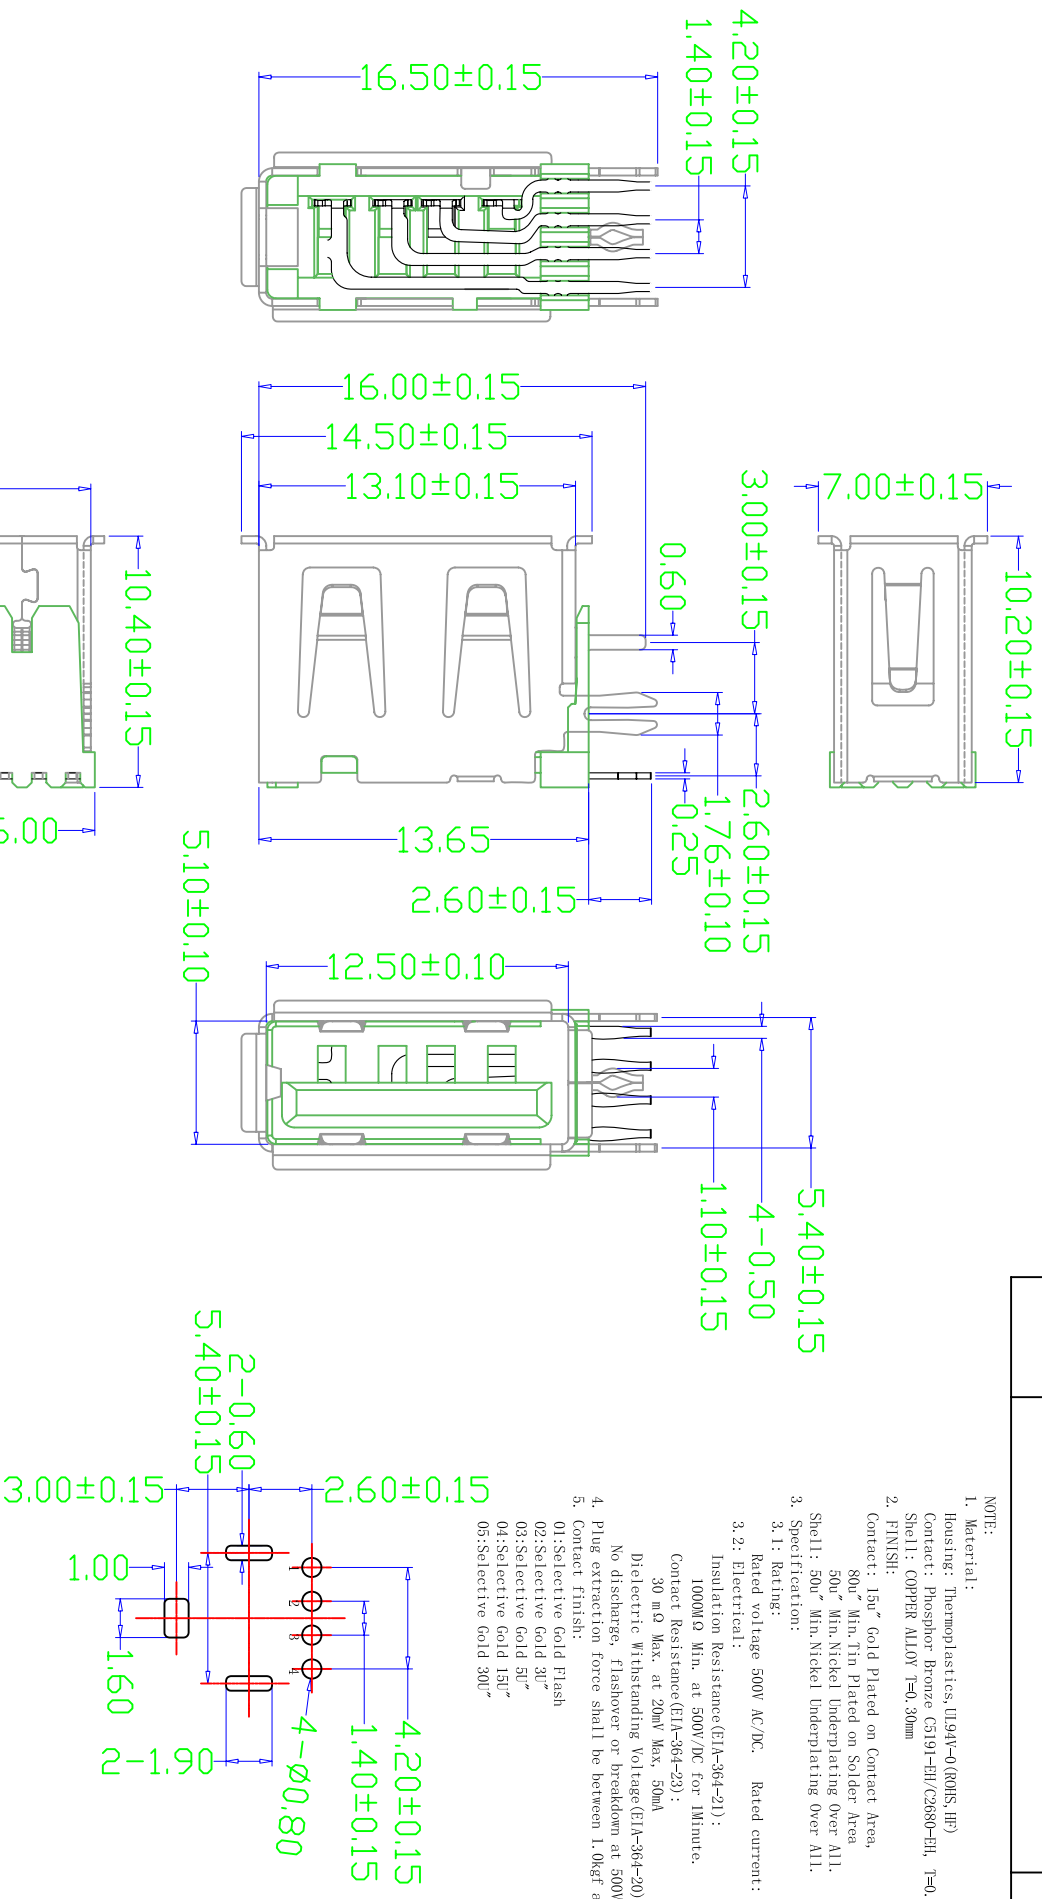

产品图

深圳市精拓金电子有限公司

PRODUCT CHART DMC		公差一览表		单位		制图		制图料号	
TOLERANCE UNLESS OTHERWISE:				MM		DRAWING		PRODUCT PART NO.	
X.	±0.25	X.	±5.°	X		审核		产品名称	
.X	±0.20	.X	±2.°	1:1		制图		USB A/F 侧插短体外壳(A款)	
.XX	±0.15	.XX	±1.°	2014.02.20		核准		角法	
.XXX	±0.10	.XXX	±0.5°	DATE		APPD		版本	
				7		7		A0	

G 1 2 3 4 5 6 7 8 9 10 G

F

E

D

C

B

A