


MAPX	MODIFICATION	DATE
------	--------------	------

NOTE:

- Material:
Housing: Thermoplastics (U94V-0(R0HS-HP))
Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
- FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min Nickel Underplating Over All.
- Specification:

- 3.1: Rating:
Rated voltage 500V AC/DC. Rated current: 2 A Max.
- 3.2: Electrical:
Insulation Resistance(EIA-364-21):
1000MΩ Min. at 500V/DC for 1Minute.
Contact Resistance(EIA-364-22):
30 mΩ Max. at 20mV Max, 50mA
- Dielectric Withstanding Voltage(EIA-364-20):
No discharge, Flashover or breakdown at 500V/AC 1Minute
- Plug extraction force shall be between 1.0kgf and 2.00kgf
5. Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

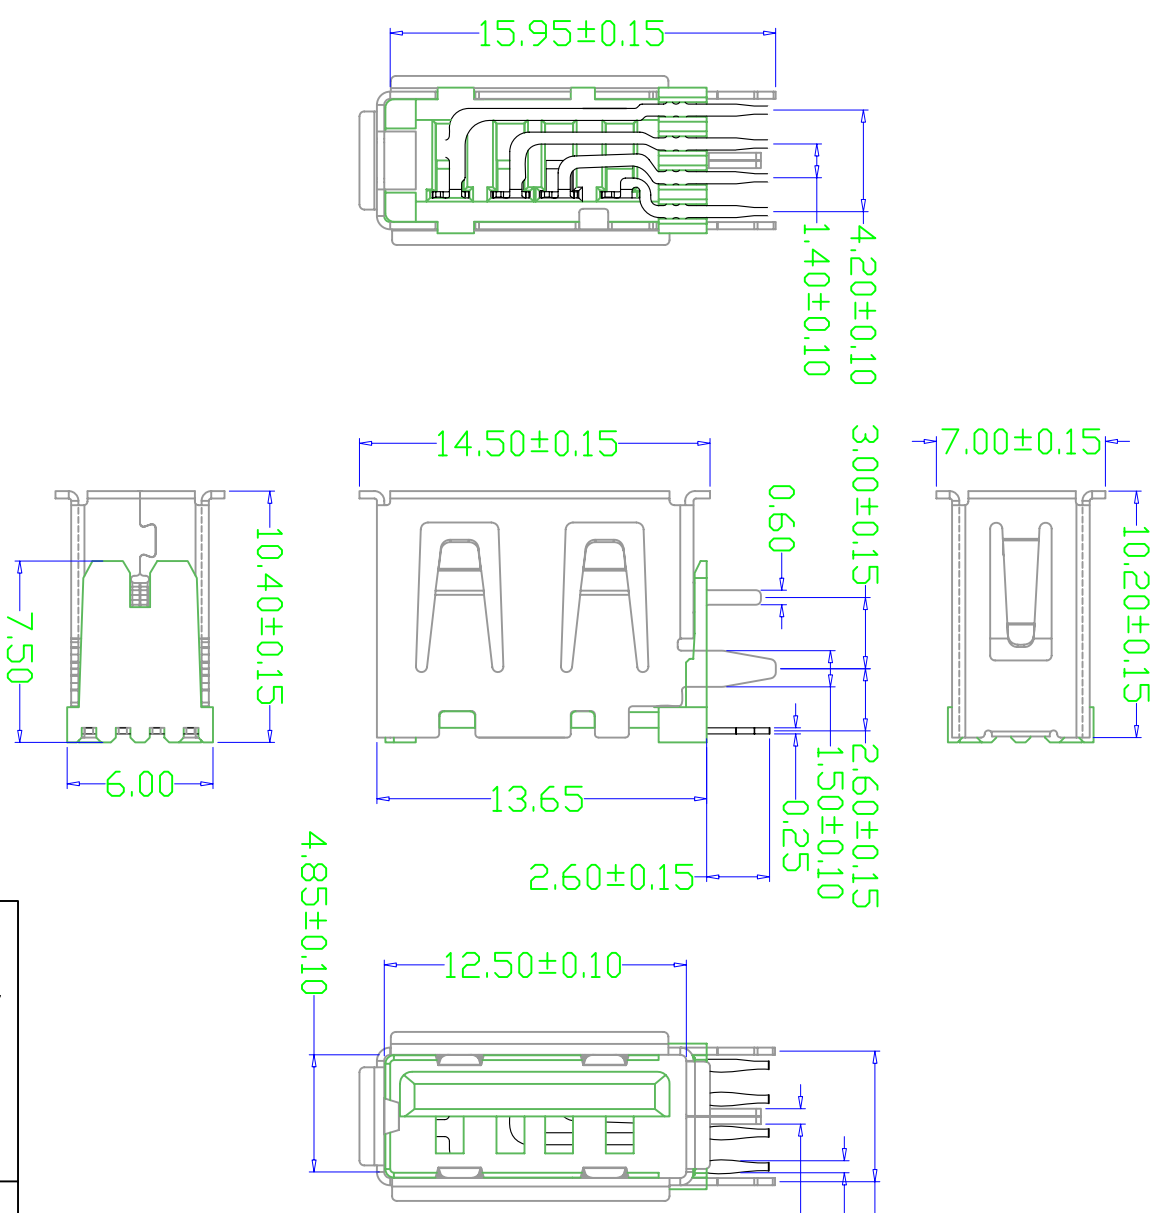

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

产品图

深圳市精拓金电子有限公司

公差一览表

公差	公差	公差	公差
X	±0.25	X	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

单位	MM	制图	Z-Y-B	制图料号	
比例	1:1	审核		产品名称	USB A/F10, 5侧插短体三直脚有边成品
日期	2014.07.20	核准		产品 No.	
DATE		APPD		角法	
				版本	A0
				VER	