

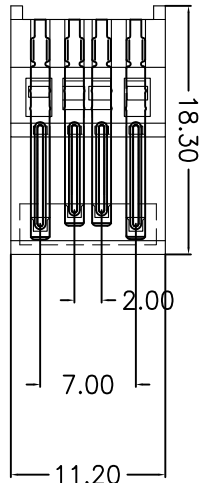



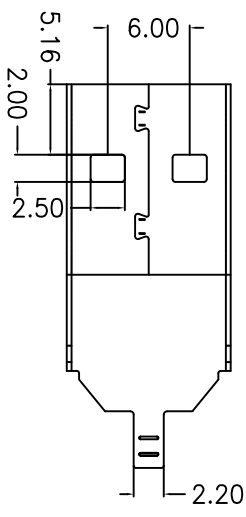
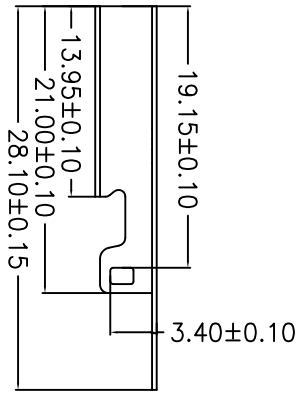


NOTES:

- Housing: Thermoplastics, UL94V-0
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating: 1.5 AMP, 30V AC
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 30 MΩ Max.
- Dielectric Withstanding Voltage: 500V AC
- Temperature Range: -55° C to +85° C
- Insulator color: Black/White
- Plastic material: PBT/LCP
- Shell finish: Nickel plated/Tin-Lead plated
- Contact finish:
 - 01: Selective Gold Flash
 - 02: Selective Gold 3U"
 - 03: Selective Gold 5U"
 - 04: Selective Gold 15U"
 - 05: Selective Gold 30U"



目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	JTJ-USB-AM-28MM-03
X	±0.15	X'	±5'	审核 CHKD		产品名称 PRODUCT NO.	USB AM短体28MM三件套0D4.0
.X	±0.10	.X'	±2'	核准 APPD	郭治富	角法 VIEW	
.XX	±0.05	.XX'	±1'	日期 DATE	2009/10/20	版本 VER	A0
.XXX	±0.03	.XXX'	±0.5'				

