


MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating: 1.5 AMP. 30V AC
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 30 MΩ Max.
- Dielectric Withstanding Voltage: 500W AC
- Temperature Range: -55° C to +85° C
- Insulator color: Black/White
- Plastic material: PBT/LCP
- Shell finish: Nickel plated/Tin-lead plated
- Contact finish:
 - 01: Selective Gold Flash
 - 02: Selective Gold 3U"
 - 03: Selective Gold 5U"
 - 04: Selective Gold 15U"
 - 05: Selective Gold 30U"

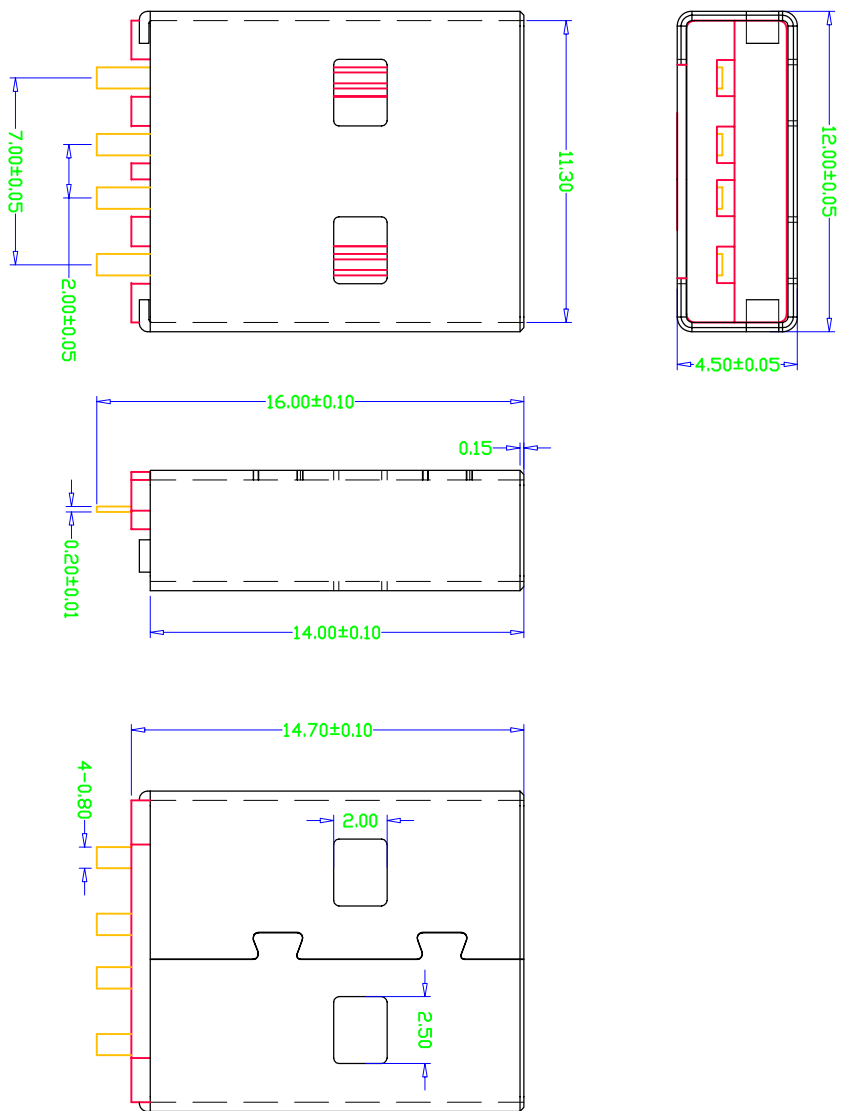

深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG		公差一览表 TOLERANCE TABLE		单位 UNITS		制图 DRAWING		制图料号 PRODUCT PART NO.	
X	±0.15	X	±0.15	X	MM	X	Z-Y-B	X	USB A/M短体夹板
X	±0.10	X	±0.10	X	1:1	X	审核	X	产品名称 PRODUCT NO.
XX	±0.05	XX	±0.05	XX	日期 DATE	XX	核准	☉	版本 VER
XXX	±0.03	XXX	±0.03	XXX	2012.11.15	XXX	APPD	☐	A0