


| | | |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
|------|--------------|------|

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V AC
- Insulation Resistance:1000MΩ Min.
- Contact Resistance:30 MΩ Max.
- Dielectric Withstanding Voltage:500W AC
- Temperature Range:-55° C to +85° C
- Insulator color: Black/White
- Plastic material:PB/T/LCP
- Shell finish:Nickel plated/Tin-Lead plate
- Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

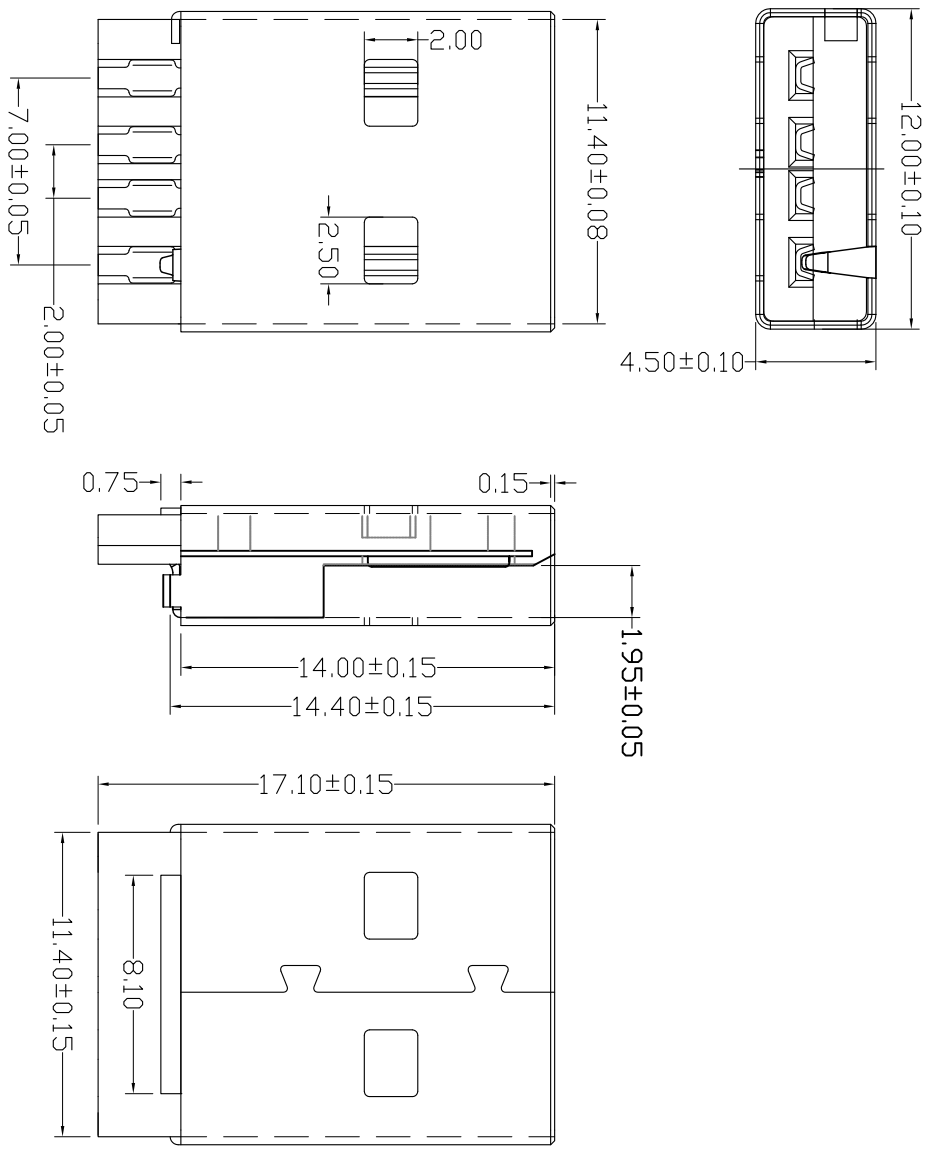

深圳市精拓金电子有限公司

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

| | | | |
|------|-------|------|-------|
| X | ±0.25 | X | ±5° |
| X | ±0.20 | X | ±2° |
| .XX | ±0.15 | .XX | ±1° |
| .XXX | ±0.10 | .XXX | ±0.5° |

| | | | | | |
|-------------|-----------|---------------|-------|-------------------------|-------------|
| 单位 UNITS | MM | 制图 DRAWING | Z-Y-B | 制料号 PRODUCT PART NO. | |
| 比例 SCALE | 1:1 | 审核 CHKD | | 产品名称 PRODUCT NO. | USB A/M短体前壳 |
| 日期 DATE | 2014.3.15 | 核准 APPD | | 角法 VIEW | 版本 VER |
| | | | | ⊕ | A0 |

G 1 2 3 4 5 6 7 8 9 10 G
F F
E E
D D
C C
B B
A A