


|      |              |      |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
|------|--------------|------|

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V
- Insulation Resistance:1000MΩ Min.
- Contact Resistance:30 MΩ Max.
- Dielectric Withstanding Voltage:500W AC
- Temperature Range:-55° C to +85° C
- Insulator color: Black/White
- Plastic material:PBT/LCP
- Shell finish:Nickel plated/Tin-Lead plate
- Contact finish:
  - 01:Selective Gold Flash
  - 02:Selective Gold 3U"
  - 03:Selective Gold 5U"
  - 04:Selective Gold 15U"
  - 05:Selective Gold 30U"

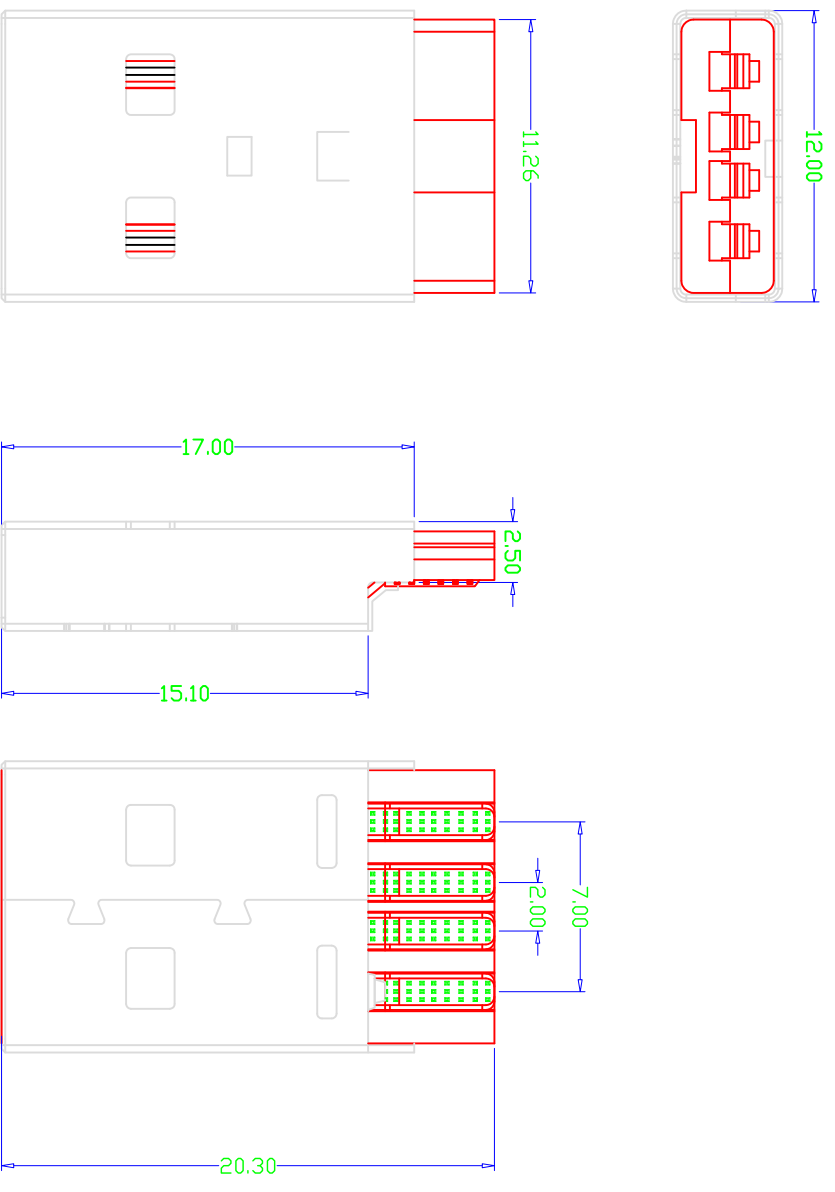

# 深圳市精拓金电子有限公司

|     |                   |
|-----|-------------------|
| 产品图 | PRODUCT CHART DWG |
|-----|-------------------|

公差一览表

| TOLERANCE | UNLESS OTHERWISE | OTHERWISE  |
|-----------|------------------|------------|
| X         | ±0.25            | X ±5.°     |
| X         | ±0.20            | X ±2.°     |
| .XX       | ±0.15            | .XX ±1.°   |
| .XXX      | ±0.10            | .XXX ±0.5° |

| 单位    | MM         | 制图      | Z-Y-B | 制料号                  |
|-------|------------|---------|-------|----------------------|
| UNITS | MM         | DRAWING | Z-Y-B | PRODUCT PART NO.     |
| 比例    | 1:1        | 审核      |       | 产品名称                 |
| SCALE | 1:1        | CHRD    |       | PRODUCT NO.          |
| 日期    | 2012.12.25 | 核准      |       | USB A/M前壳17.0 (正面短路) |
| DATE  | 2012.12.25 | APPR    |       | 角法                   |
|       |            |         |       | 版本                   |
|       |            |         |       | VER                  |
|       |            |         |       | A0                   |