
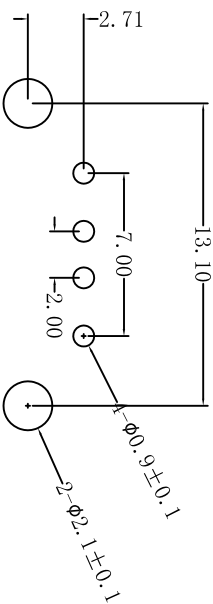
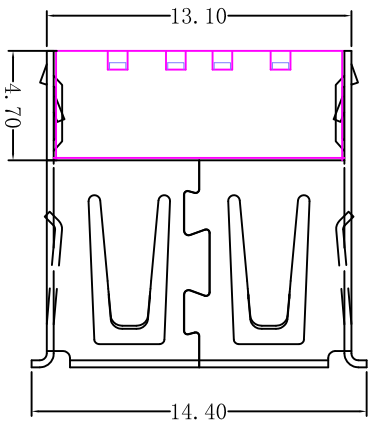


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
------------	----------------------	------------

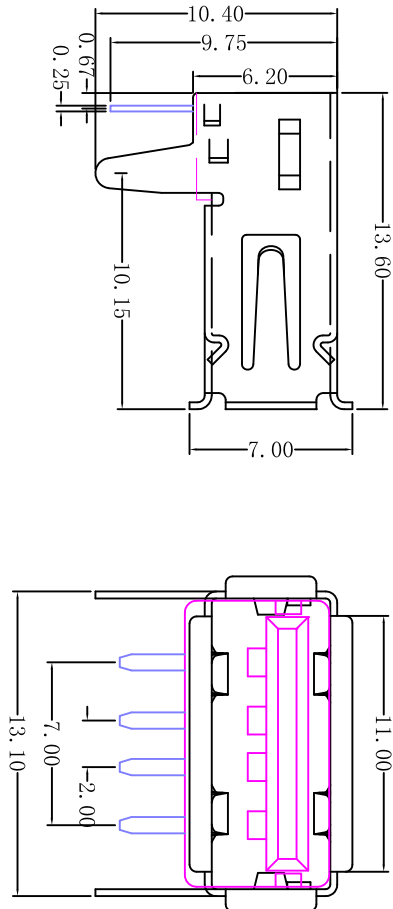

RBCMMENDDBD P.C.B PATTBRN LAYD UT

备注：侧弹分为外弹与内弹

- NOTES:
- Housing: Thermoplastics, UL94V-0
  - Contact: Copper Alloy
  - Shell: Copper Alloy/Steel
  - Voltage Current Rating: 1.5 AMP. 30V AC
  - Insulation Resistance: 1000MΩ Min.
  - Contact Resistance: 30 MΩ Max.
  - Dielectric Withstanding Voltage: 500W AC
  - Temperature Range: -35°C to +85°C
  - Insulator color: Black/White
  - Plastic material: PBT/LCP/others
  - Shell finish: Nickel plated/Tin-Lead plated
  - Mechanical:
  - Mating Force: 3.5KG MAX
  - Umating Force: 0.7 KG MIN.
  - Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U”
- 03: Selective Gold 5U”
- 04: Selective Gold 15U”
- 05: Selective Gold 30U”

# 深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG		制图 DRAWING		产品料号 PRODUCT PART NO	
公差一览表 TOLERANCE UNLESS OTHERWISE		2-Y-B		JTJ-USB-AF-32	
X	±0.15	X	±5°	产品名称 PRODUCT NAME	
X	±0.10	X	±2°	USB-A/F无后盖直脚	
.XX	±0.05	.XX	±1°	角法 ANGLE	
.XXX	±0.03	.XXX	±0.5°	版本 VERSION	
单位 UNITS		日期 DATE		审核 APPD	
MM		2009/10/20			
比例 SCALE		1:1			

