


MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V AC
- Insulation Resistance:1000M $\Omega$  Min.
- Contact Resistance:30 M $\Omega$  Max.
- Dielectric Withstanding Voltage:500W AC
- Temperature Range:-55 $^{\circ}$  C to +85 $^{\circ}$  C
- Insulator color: Black/White
- Plastic material:PBT/LCP
- Shell finish:Nickel plated/Tin-Lead plate
- Contact finish:
  - 01:Selective Gold Flash
  - 02:Selective Gold 3U"
  - 03:Selective Gold 5U"
  - 04:Selective Gold 15U"
  - 05:Selective Gold 30U"

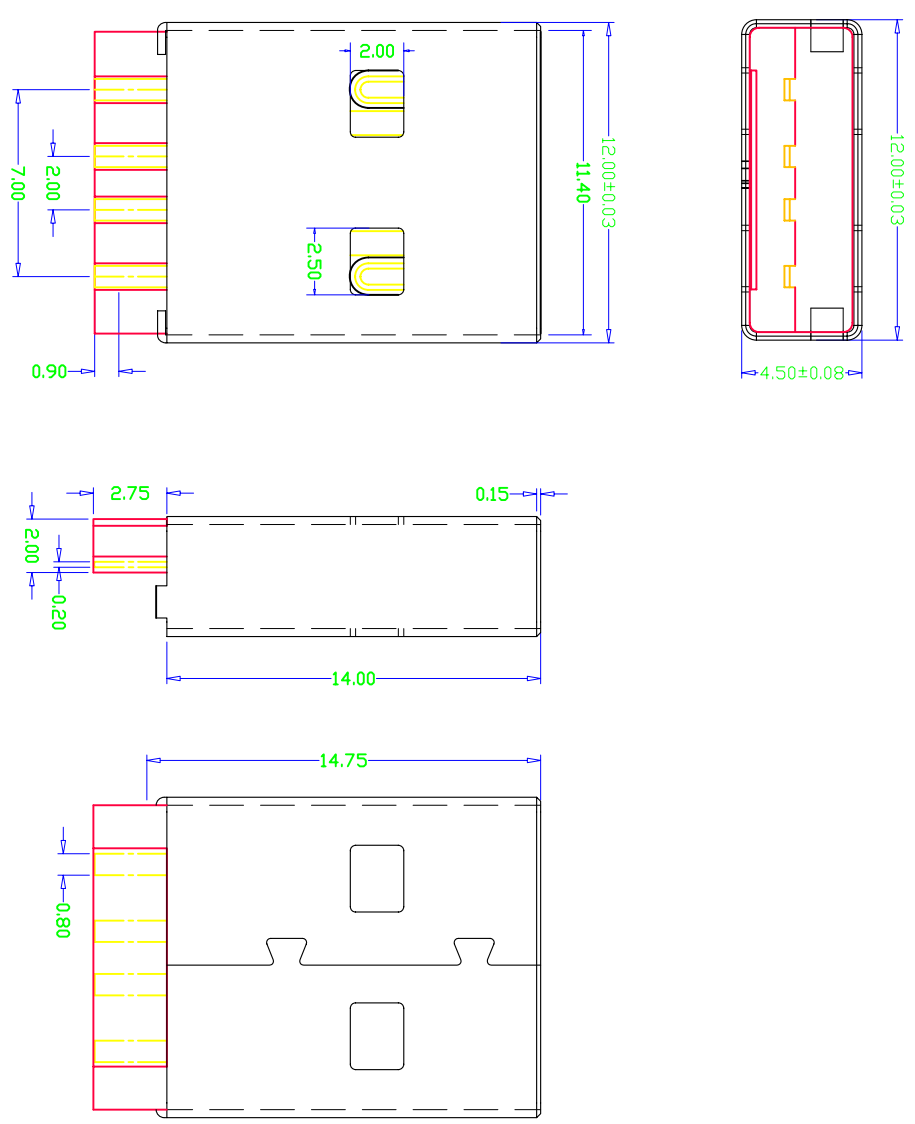

**产品图**  
PRODUCT CHART DWG

公差一览表  
TOLERANCE UNLESS OTHERWISE

X	±0.15	X	±5 $^{\circ}$
X	±0.10	X	±2 $^{\circ}$
.XX	±0.05	.XX	±1 $^{\circ}$
.XXX	±0.03	.XXX	±0.5 $^{\circ}$

**深圳市精拓金电子有限公司**

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制料号 PRODUCT PART NO.	
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	USB A/M短体前壳
日期 DATE	2013.1.15	核准 APPD		角法 VIEW	版本 VER
					A0

G 1 2 3 4 5 6 7 8 9 10

F

E

D

C

B

A

G

F

E

D

C

B

A