





MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:
 1. HOUSING: SEE NOTES, UL94V-0 .
 TERMINAL: SEE NOTES.
 SHELL: SEE NOTES.


SPECIFICATION:
 1. ELECTRICAL CHARACTERISTIC:
 CONTACT RESISTANCE: 30MΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 INSULATION RESISTANCE: 1000MΩ MIN
 2. MECHANICAL CHARACTERISTIC:
 INSERTION FORCE: 35N(3.57KGF) MAX
 EXTRACTION FORCE: 10~35N(1.02~3.57KGF)/MIN
 DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
 5000 CYCLES MIN

3. ENVIRONMENTAL:
 OPERATING TEMPERATURE: -55°C+85°C
 4. Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U"
- 03: Selective Gold 5U"
- 04: Selective Gold 15U"
- 05: Selective Gold 30U"

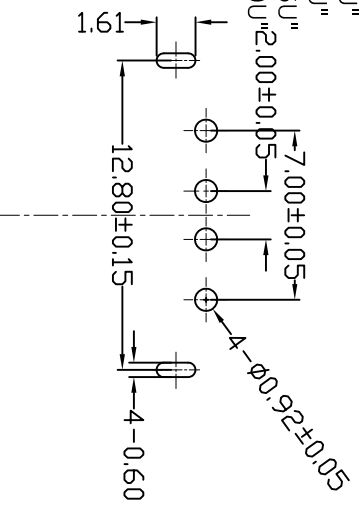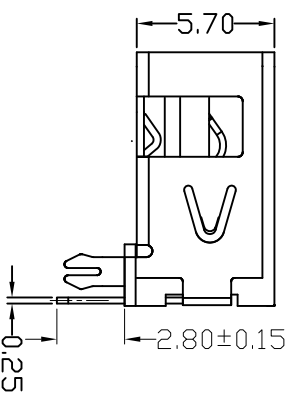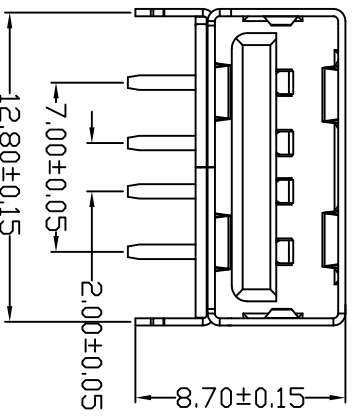

FRONT EDGE OF CONNECTOR
 PCB LAYOUT (T=1.60mm)

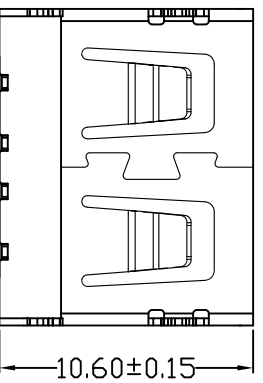

产品图
 PRODUCT CHART DWG
 公差一覽表
 TOLERANCE UNLESS OTHERWISE

深圳市精拓金电子有限公司

UNIT	MM	DRAWING	Z-Y-B	PRODUCT PART NO.	JTJ-1(USB-10.6-002
SCALE	1:1	CHECK	审核	PRODUCT NAME	USB A/F 10.6无边前四脚鱼叉(方弹)
DATE	20130924	APPRO	核准	角法	版本
XXX	±0.10	.XXX	±0.5°	VIEW	AD
XX	±0.15	.XX	±1.°		
X	±0.20	.X	±2.°		
X	±0.25	.X	±5.°		

