
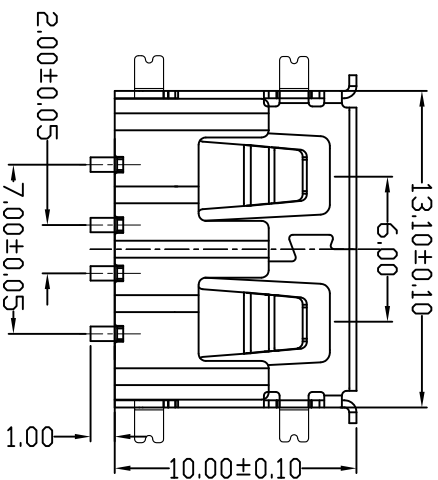
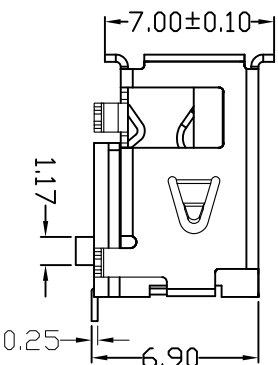
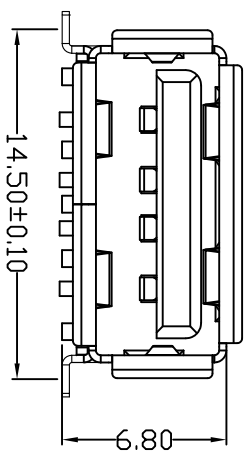


正向10.0前两脚, SMT-*6.80

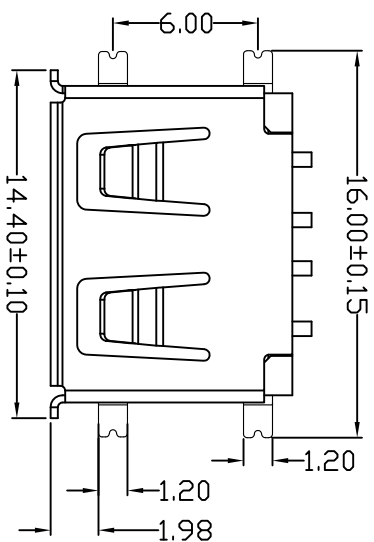

MAPX	MODIFICATION	DATE
------	--------------	------

NOTES:
 1. HOUSING: SEE NOTES, UL94V-0.
 TERMINAL: SEE NOTES.
 SHELL: SEE NOTES.

SPECIFICATION:
 1. ELECTRICAL CHARACTERISTIC:
 CONTACT RESISTANCE: 30MΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 INSULATION RESISTANCE: 1000MΩ MIN
 2. MECHANICAL CHARACTERISTIC:
 INSERTION FORCE: 35N(3.57KGF) MAX
 EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
 DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
 5000 CYCLES MIN

5000 CYCLES EXTRACTION FORCE: 3~35N

3. ENVIRONMENTAL:
 OPERATING TEMPERATURE: -55°C+85°C

4. Contact finish:
 01: Selective Gold Flash
 02: Selective Gold 3U"
 03: Selective Gold 5U"
 04: Selective Gold 15U"
 05: Selective Gold 30U"
 4-1.00
 4-1.00
 4-1.00
 4-2.00
 2.00±0.05
 1.55
 1.55
 7.00
 14.50
 1.55
 1.55

FRONT EDGE OF CONNECTOR
 PCB LAYOUT

产品图

深圳市精拓金电子有限公司

公差一览表		单位		制图		制图料号	
TOLERANCE UNLESS OTHERWISE	UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO.	JTY-1(USB-10.0/SMT-003	
X: ±0.15	X: ±5°		审核		产品名称	USB A/F 10.0有边四脚鱼叉SMT (方雅)	
X: ±0.10	X: ±2°	1:1	CHKD		PRODUCT NO.		
XX: ±0.05	XX: ±1°	日期	核准		角法		版本
XXX: ±0.03	XXX: ±0.5°	2013/08/24	APPR		VER		AD